

RCX-1211

Workstation-grade 9th Intel® Xeon®/Core™ i7/i5/i3 Fanless Robust Computing System with Intel® C246 Chipset, 2 GigE LAN, 1 PCIe x16, 1 PCI, 6 USB 3.1 Gen 2, 4 COM, 2 SIM, 32 Isolated DIO, High Performance, Expandable, Rugged, -40°C to 75°C Extended Temperature



Features

- 8 Cores 9th Generation Intel® Xeon®/Core™ i7/i5/i3 (Coffee Lake Refresh) with workstation-grade Intel® C246 Chipset
- 4 DDR4 2666MHz Memory, up to 128GB (ECC/Non-ECC)
- 6 ports external USB 3.1 Gen 2 support up to 10Gbps data transfer
- Rugged & Fanless design, -40°C to 75°C Operating Temperature
- 2 External SIM Socket for WiFi/4G/3G/LTE/GPRS/UMTS
- 4 2.5" SSD Bracket, RAID 0, 1, 5, 10 supported
- 1 PCIe x16 Slot, 1 PCI Slot
- Supports max 300W Power Budget for independent graphics operation
- 32 Isolated DIO, 6 USB 3.1, 4 COM RS-232/422/485
- 2 M.2 Socket : 1 M.2 Key M, 1 M.2 Key E
- 6V to 36V DC Power Input with 80V Surge Protection
- Configurable Ignition Power Control




Specifications

| System | |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Processor | Intel® Xeon®/Core™ i7/i5/i3 Processor (CFL-R S/CFL-S) |
| Chipset | Intel® C246 |
| BIOS | AMI |
| SIO | IT8786E |
| Memory | 4 DDR4 2666MHz SO-DIMM, up to 128GB (ECC/Non-ECC) |
| I/O Interface | |
| Serial | 4 COM RS-232/422/485 (ESD 8KV) |
| USB | <ul style="list-style-type: none"> ▪ 6 USB 3.1 Gen 2 (External) ▪ 1 USB 2.0 (Internal) |
| Isolated DIO | 32 Isolated DIO : 16 DI, 16 DO |
| LED | Power, HDD, Wireless |
| SIM Card | 2 External SIM Card Socket |
| Expansion | |
| Mini PCIe | 2 Full-size for PCIe/USB/External SIM Card/mSATA |
| M.2 | 1 M.2 Key E Socket |
| PCIe | 1 PCIe x16 |
| PCI | 1 PCI |
| Graphics | |
| Graphics Processor | Intel® UHD Graphics 630 |
| Interface | <ul style="list-style-type: none"> ▪ 1 DVI-I : Up to 1920 x 1200 @60Hz ▪ 2 DisplayPort : Up to 4096 x 2304 @60Hz |
| Storage | |
| SATA | 4 SATA III (6Gbps) support S/W RAID 0, 1, 5, 10 |
| mSATA | 2 SATA III (Mini PCIe Type, 6Gbps) |
| Storage Device | <ul style="list-style-type: none"> ▪ 2 2.5" SSD/HDD Bracket (Internal) ▪ 1 M.2 Key M Socket (Internal) |
| Audio | |
| Audio Codec | Realtek ALC892, 5.1 Channel HD Audio |
| Audio Interface | 1 Mic-in, 1 Line-out |
| Ethernet | |
| LAN 1 | Intel® I219LM GigE LAN supports iAMT 12.0 |
| LAN 2 | Intel® I210 GigE LAN |


| Power | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Input | 6V to 36V, DC-in |
| Power Interface | 3-pin Terminal Block : V+, V-, Frame Ground |
| Ignition Control | 16 Mode (Internal) |
| Remote Switch | 3-pin Terminal Block |
| Surge Protection | Up to 80V/1ms Transient Power |
| Others | |
| TPM | Optional Infineon SLB9665 supports TPM 2.0, LPC Interface |
| Watchdog Timer | Reset : 1 to 255 sec./min. per step |
| Smart Management | Wake on LAN, PXE supported |
| HW Monitor | Monitoring temperature, voltages. Auto throttling control when CPU overheats. |
| Software Support | |
| OS | Windows 10, Linux |
| Mechanical | |
| Dimensions | 250.4mm x 210.0mm x 131.4mm (9.86" x 8.27" x 5.17") |
| Weight | 4.3 kg (9.5 lb) |
| Mounting | Wallmount by mounting bracket |
| Environment | |
| Operating Temperature | 35W TDP CPU : -40°C to 75°C (-40°F to 158°F) 65W TDP CPU : -40°C to 55°C (-4°F to 131°F) 80W TDP CPU : -40°C to 45°C (-4°F to 113°F) |
| Storage Temperature | -40°C to 85°C (-40°F to 185°F) |
| Humidity | 5% to 95% Humidity, non-condensing |
| Relative Humidity | 95% @ 75°C |
| Shock | <ul style="list-style-type: none"> ▪ IEC 60068-2-27 ▪ SSD : 50G @ wallmount, Half-sine, 11ms |
| Vibration | <ul style="list-style-type: none"> ▪ IEC 60068-2-64 ▪ SSD : 5Grms, 5Hz to 500Hz, 3 Axis |
| EMC | CE, FCC, EN50155, EN50121-3-2 |

Dimensions

Unit : mm/ inch

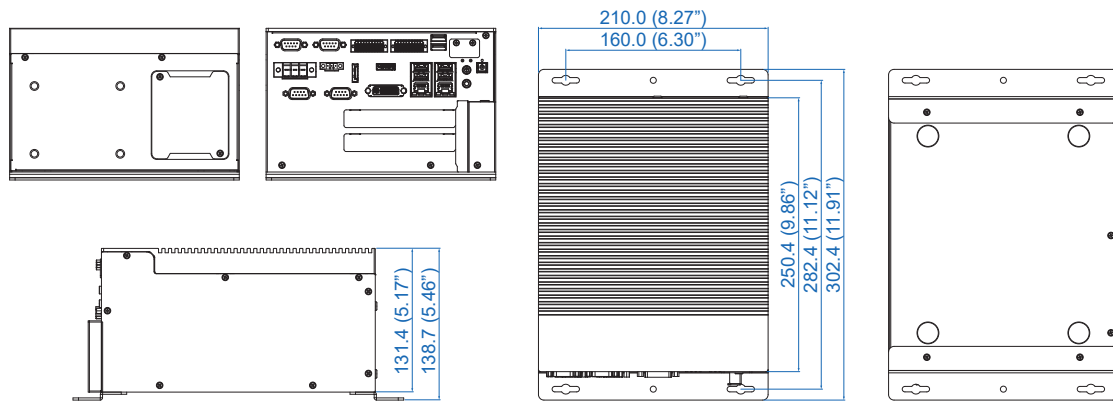

Front I/O

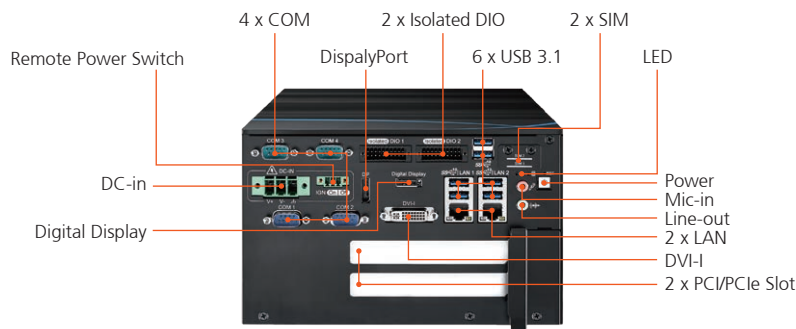

Order Information

| | |
|-----------------|--------------------------------------------------------------------------------|
| RCX-1211 | RCX-1200, 2 GigE LAN, 1 PCIe x16, 1 PCI, 4 COM, 6 USB 3.1, 2 SIM, Isolated DIO |
|-----------------|--------------------------------------------------------------------------------|

Accessories

| | |
|-----------------------------|-------------------------------------------------------------------------------------------------------|
| DDR4 32G | Certified DDR4 32GB 2666MHz RAM |
| DDR4 16G | Certified DDR4 16GB 2666/2400/2133 MHz RAM |
| DDR4 8G | Certified DDR4 8GB 2666/2400/2133 MHz RAM |
| DDR4 4G | Certified DDR4 4GB 2666/2400/2133 MHz RAM |
| PWA-160W-WT | 160W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C |
| PWA-280W-WT | 280W, 24V, 85V AC to 264V AC Power Adapter with 3-pin Terminal Block, Wide Temperature -30°C to +70°C |
| PWS-480W-WT | 480W, 24V, 90V AC to 305V AC Power Supply, Wide-Temp, IP65 |
| PWS-600W | 600W, 24V, 90V AC to 305V AC Power Supply |
| PWS-600W-WT | 600W, 28.8V, 90 to 305V AC Power Supply, Wide Temperature -40°C to +70°C |
| FAN Module | Fan Module for RCX-1400/RCX-1400F Series |
| FAN Cover | Fan Cover for RCX-1000 Series |
| TMK2-20P-100 | Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm |
| TMK2-20P-500 | Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm |
| TMB-TMBK-20P | Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting |
| 4G Module | Mini PCIe 4G/GPS Module with Antenna |
| WiFi & Bluetooth | WiFi & Bluetooth Module with Antenna |

CPU List

| Series | CPU | Cores | GHz | TDP (W) | ECC RAM |
|--------------|-----------|-------|-----|---------|---------|
| Intel® Xeon® | E-2176G | 6 | 4.6 | 80 | Yes |
| | E-2124G | 4 | 4.5 | 71 | |
| | E-2278GE | 8 | 4.7 | 80 | |
| | E-2278GEL | 8 | 3.9 | 35 | |
| | E-2226GE | 6 | 4.6 | 80 | |
| Intel® Core™ | i7-8700 | 6 | 4.6 | 65 | N/A |
| | i7-8700T | 6 | 4 | 35 | |
| | i7-9700E | 8 | 4.4 | 65 | |
| | i7-9700TE | 8 | 3.8 | 35 | |
| | i5-8500 | 6 | 4.1 | 65 | |
| | i5-8500T | 6 | 3.5 | 35 | |
| | i5-9500E | 6 | 4.2 | 65 | |
| | i5-9500TE | 6 | 3.6 | 35 | |
| | i3-8100 | 4 | 3.6 | 65 | |
| | i3-8100T | 4 | 3.1 | 35 | |
| Yes | i3-9100E | 4 | 3.7 | 65 | |
| | i3-9100TE | 4 | 3.2 | 35 | |