
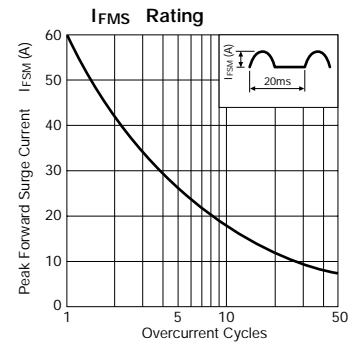
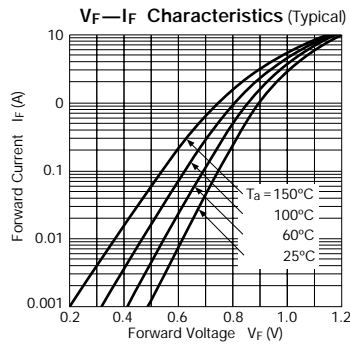





Damper Diodes (For TV)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25°C)						Others		Fig.	
	V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA) V _R = V _{RM} max	I _{R(H)} (μA) V _R = V _{RM} Ta = 100°C max	t _{rr} (1) (μs)	t _{rr} (2) (μs)	R _{th(j-ℓ)} (°C/W)	Mass (g)		
						max	I _F (A)								
RH 10F	1500	0.8	60	-40 to +150		1.0	1.0	10	500	4.0	100/100	1.3	15.0	0.44	(A)
RH 2D	1300	1.0											12.0	0.6	(B)
RH 2F	1500												10.0	1.0	(C)
RH 3F															
RH 3G	1600	2.5	50			1.3	2.5	50					8.0	1.2	(D)
RH 4F	1500														




RH 10F, 2D, 2F

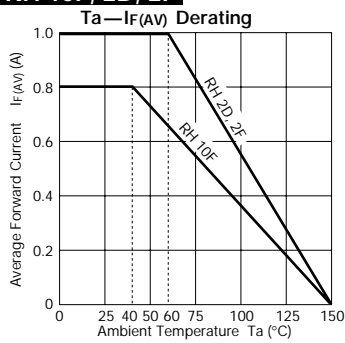

RH 3F, 3G

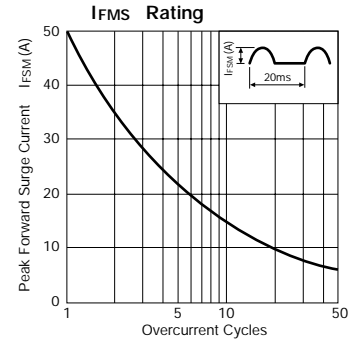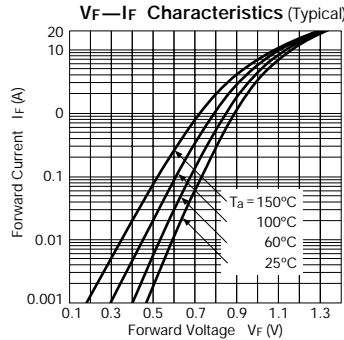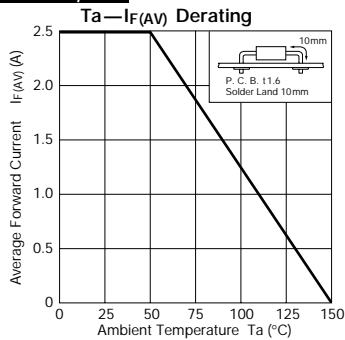

RH 4F

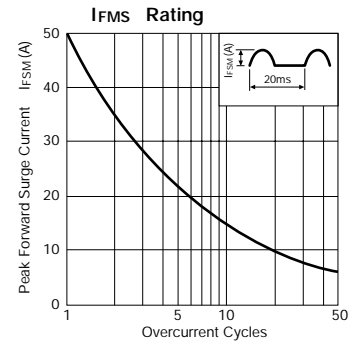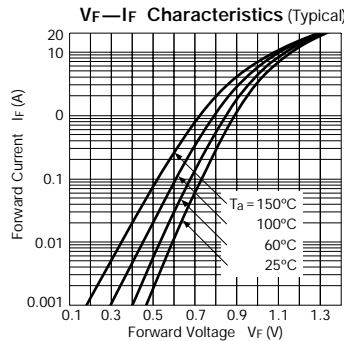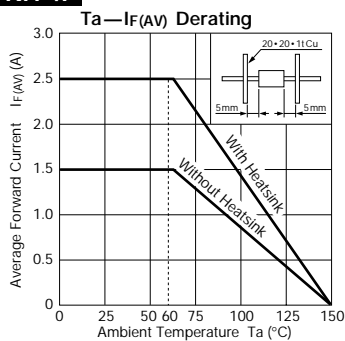

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

