

RL201G thru RL207G

Glass Passivated Junction General Purpose Rectifiers

Reverse Voltage 50 to 1000V Forward Current 2.0A

.Feature & Dimensions

- * Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- * Construction utilizes void-free molded plastic technique
- * Low reverse leakage
- * High forward surge capability
- * Cavity-free Glass passivated junction
- * High temperature soldering guaranteed:
 260°C/10 seconds, 0.375" (9.5mm) lead length,
 5 lbs. (2.3kg) tension

.Mechanical Data

Case: JEDEC DO-15, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.015 oz., 0.40 g

Handling precaution: None

1.Electrical Characteristic

Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


| Parameter Symbol | symbol | RL201 G | RL202 G | RL203 G | RL204 G | RL205 G | RL206 G | RL207 G | Unit |
|---|-----------------|-------------|------------|------------|------------|------------|------------|------------|--------------------|
| device marking code | | RL201 G | RL202 G | RL203 G | RL204 G | RL205 G | RL206 G | RL207 G | |
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RSM voltage | V_{RSM} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 75^\circ\text{C}$ | $I_{F(AV)}$ | 2.0 | | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 70 | | | | | | | A |
| Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead lengths at $T_A = 70^\circ\text{C}$ | $I_{R(AV)}$ | 50 | | | | | | | μA |
| Typical thermal resistance (Note 1) | $R_{\theta JA}$ | 50 | | | | | | | $^\circ\text{C/W}$ |
| Maximum DC blocking voltage temperature | T_A | 150 | | | | | | | $^\circ\text{C}$ |
| Operating junction temperature range | T_J | -50 to +150 | | | | | | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -50 to +150 | | | | | | | $^\circ\text{C}$ |

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter Symbol | symbol | RL201 G | RL202 G | RL203 G | RL204 G | RL205 G | RL206 G | RL207 G | Unit |
|---|--------|------------|------------|------------|------------|------------|------------|------------|---------------|
| Maximum instantaneous forward voltage at 2.0A | V_F | 1.10 | | | | | | | V |
| Maximum DC reverse current $T_J = 25^\circ\text{C}$ at rated DC blocking voltage $T_J = 125^\circ\text{C}$ | I_R | 5.0 200 | | | | | | | μA |
| Typical junction capacitance at 4.0V, 1MHz | C_J | 30 | | | | | | | PF |

NOTES:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

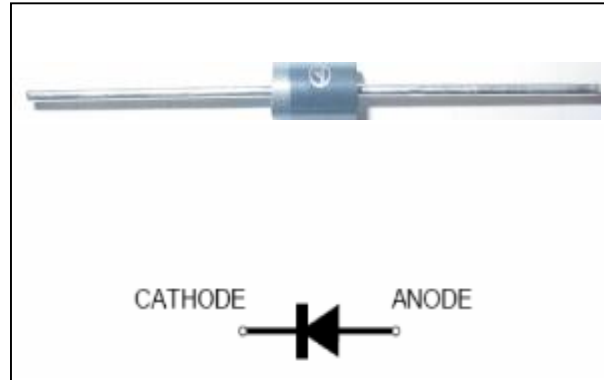

We declare that the material of product compliance with ROHS requirements

RL201G thru RL207G

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

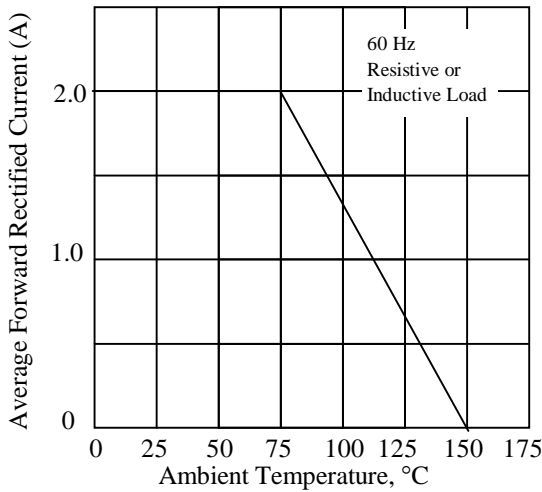


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

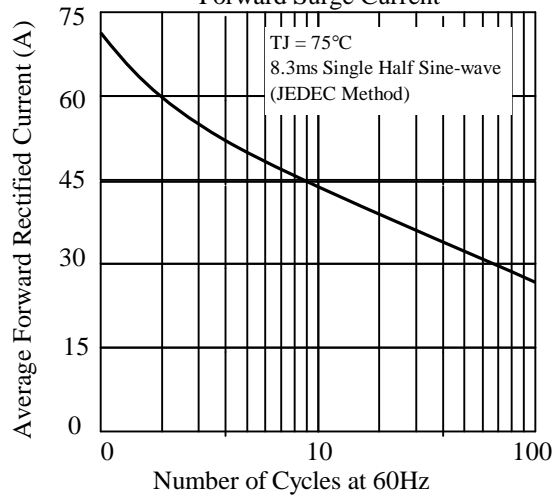


Fig. 3. - Typical Instantaneous Forward Characteristics

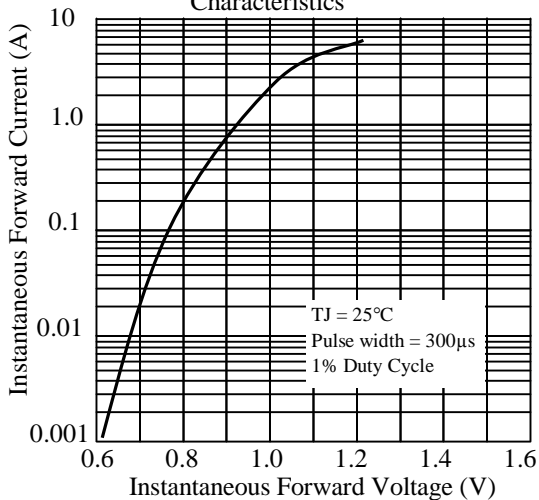


Fig. 4. - Typical Reverse Characteristics

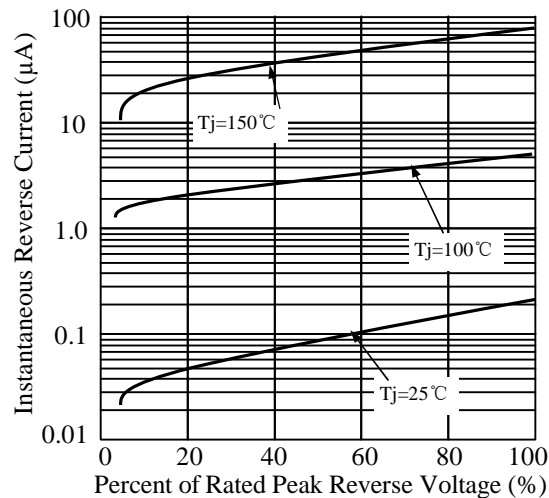


Fig 5. - typical transient thermal impedance



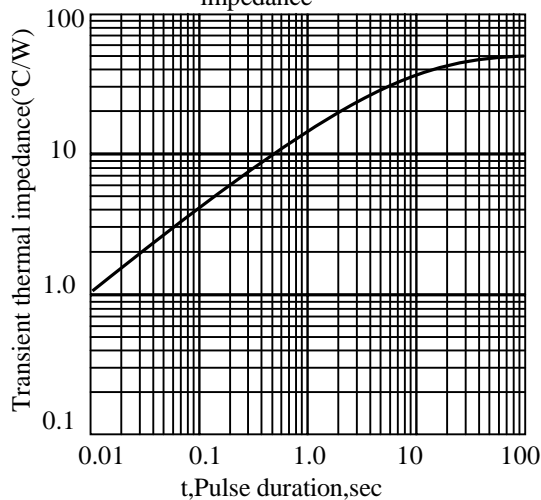


Fig 6. - Typical Junction Capacitance

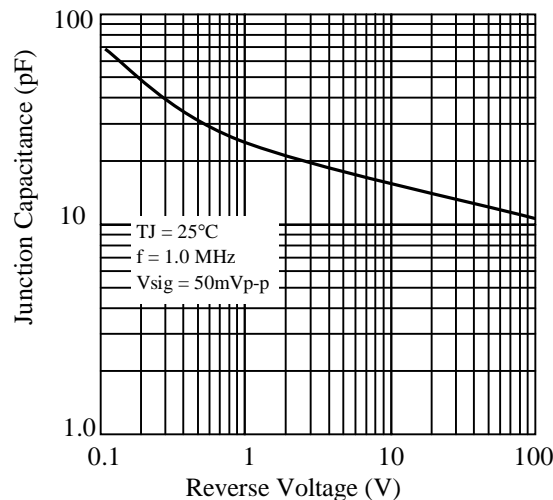


RL201G thru RL207G

3. dimension:

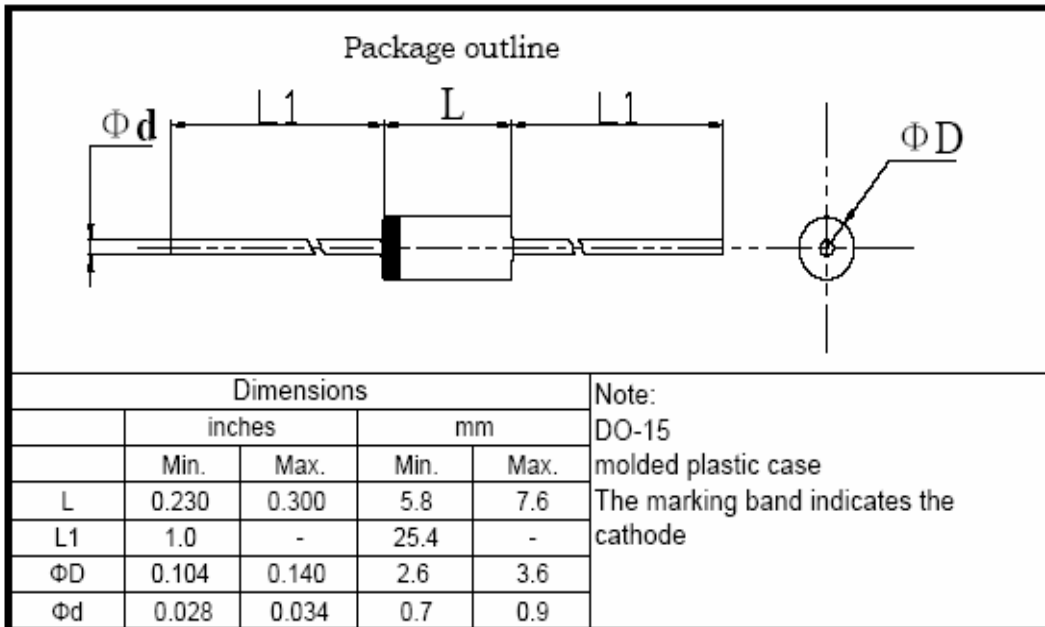

| | |
|---------------------------------|---------------|
| 标题： 塑封生产线轴向产品包装规范 | 文件编号： WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 1 页 |


- 1 弹带盒装 ammo and box
- 1.1. 弹带盒规格 ammo spec.

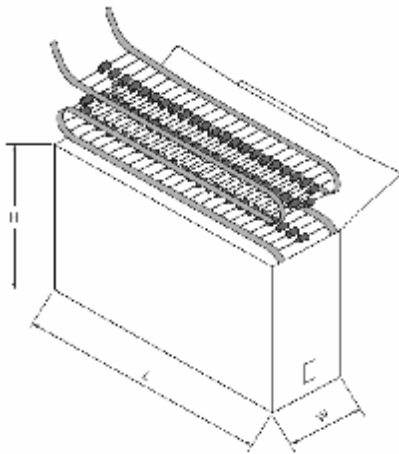

单位：mm

| | L | W | H |
|-----|-------|------|------|
| T52 | 262±2 | 76±2 | 90±2 |
| T42 | 262±2 | 64±2 | 90±2 |
| T26 | 250±3 | 45±3 | 95±3 |

- 1.2 弹带内盒要求 inner box spec.

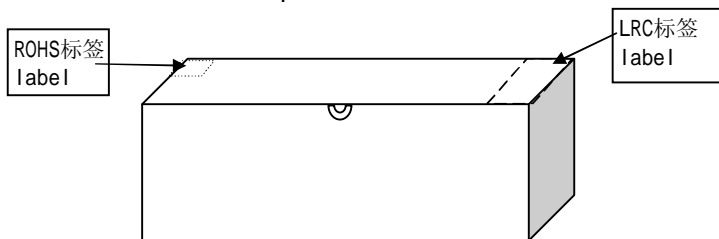

| | |
|-----------------------------|---------------|
| 标题: 塑封生产线轴向产品包装规范 | 文件编号: WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 2 页 |

1.4 标签要求 label spec.

1.4.1 LRC标签 LRC label

成型 ***** ← 成型规格 forming spec.
FORMING


型号 ***** ← LRC产品型号 type
TYPE

| | | |
|--------------------------------|-------|-----------------------------------|
| 重复峰压 (V) PRV (V) | **** | ← 产品重复峰压值 peak repetitive voltage |
| 额定电流 (A) I _o (A) | ** | ← 产品额定电流值 average output current |
| 数量 (只) QTY (pcs) | **** | ← 产品数量 quantity |
| 检验员 CHECKER | 02 | |
| 日期: DATE: | ***** | ← 产品生产日期 date |

1.4.2 环保标签 environmental protection label



2. 外箱规格 carton spec.

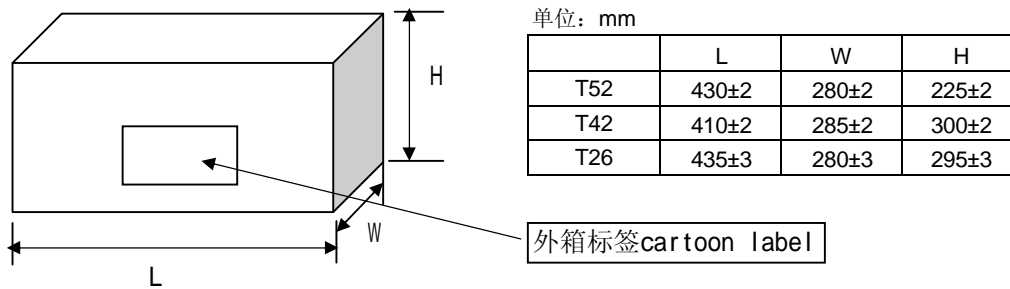


3 按以上包装方式, 编带数量和外包装箱产品数量: typing and carton spec.

| | 塑封外型 | | | |
|----------------------------------|---------------------|-------|----------------------|----------|
| | A-405 & DO-41 & R-1 | R-3 | DO-15 | DO-201AD |
| 每根编带数量 quantity/ammo | 3K | 1.8K | 2K(T52) 1.8K(T26) | 0.8K |
| 外箱数量 (T52编带) quantity/cartoon | 30K | 18K | 20K | 8.0K |
| 外箱数量 (T26编带) quantity/cartoon | 60K | 36K | 36K | - |
| 外箱数量 (T42编带) quantity/cartoon | 54K | 32.4K | 36K | - |

| | |
|---------------------------------|---------------|
| 标题： 塑封生产线轴向产品包装规范 | 文件编号：WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 3 页 |

4 编带规格 brede spec

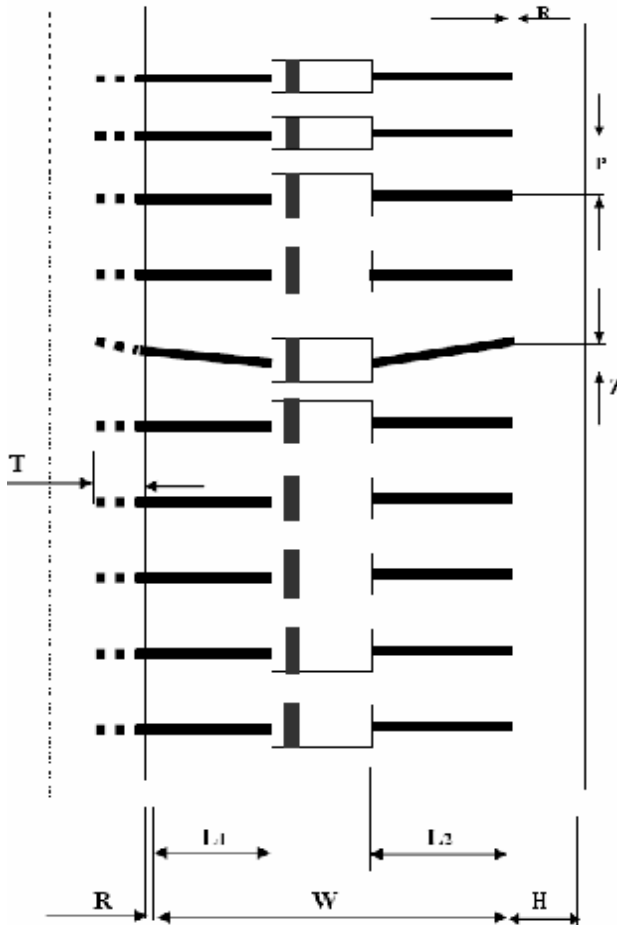

| 尺寸代号 | 编带尺寸 typing dimension | | | | | |
|--------------|-----------------------|--------------|--------------|--------------|--------------|--------------|
| | 26/tape | 35/tape | 40/tape | 42/tape | 52/tape | 52/tape# |
| W | 26 0.0/+1.6 | 35 -1.0/+0.5 | 40 -1.0/+0.5 | 42 -1.0/+1.0 | 52 -1.0/+2.0 | 52 -1.0/+2.0 |
| P | 5±0.5 | 5±0.5 | 5±0.5 | 5±0.5 | 5±0.5 | 10±0.5 |
| L1-L2 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| H | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 |
| Z | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| R | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| T | >3.5 | >3.5 | >3.5 | >3.5 | >3.5 | >3.5 |

注：52编带# 为DO-201AD编带规格 "52编带#" just for D0-201AD

1. 红白编带厚度为0.05mm；两种胶带各自之间无明显色差；编带要求均为胶带。
The typing thickness is 0.05mm and color is obvious difference
2. 两端引带20~40cm. Typing lead over 20~40cm
3. 红色编带一端为二极管“负极”；白色编带一端为二极管“正极”。
red color is cathode ,white color is anode
4. 无卤 green epoxy compound (无卤产品才贴HF only)

Green

RL201G thru RL207G

4.Update Record

| 版次 | 更新记录 | 更新作者 | 更新日期 |
|----|------|------|-----------|
| 1 | 第一版 | 周杰 | 2012-2-10 |
| 2 | 更新版面 | 周杰 | 2012-8-2 |