


Rheostats


(Potentiometers) Wirewound

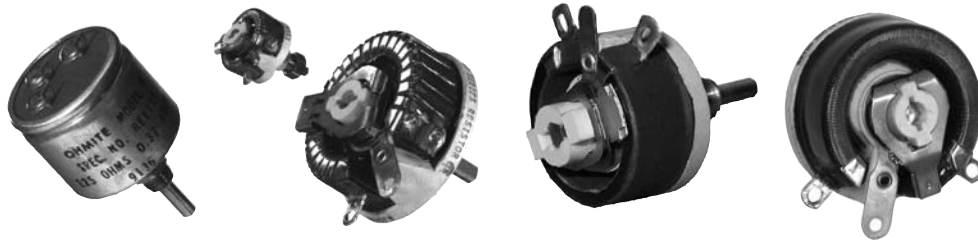

MODEL C

Model Type	Watts	Ohmic range	Core	Max. Voltage (RMS)*	Behind panel "B" (in./mm)	Diameter "D" (in./mm)	Dimension "C" (in./mm)	Shaft torque	Rotation (±5°)
C RCS/RCL	7.5	10.0-5K	enclosed	305	0.875/22.23	0.515/ 13.08	—	0.25-3 oz. in.	300°


• See Catalog #203 for complete details.

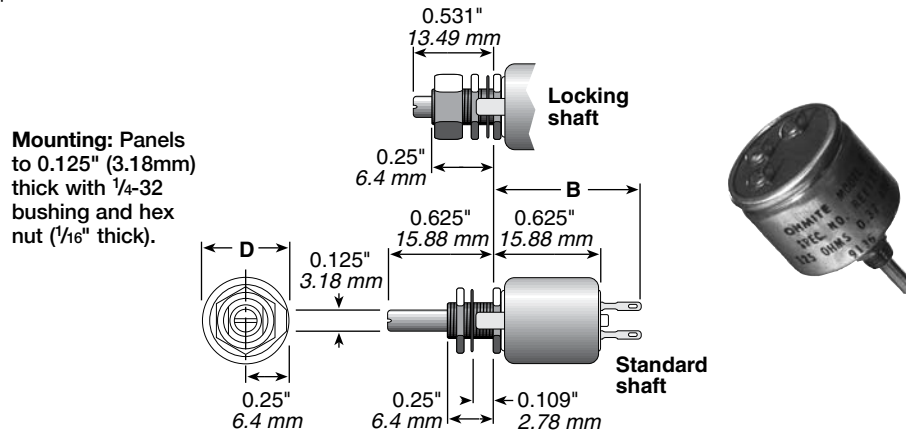

MODEL E

Model Type	Watts	Ohmic range	Core	Max. Voltage (RMS)*	Behind panel "B" (in./mm)	Diameter "D" (in./mm)	Dimension "C" (in./mm)	Shaft torque	Rotation (±5°)
E RES/REL	12.5	1.0-15K	open	305	0.688/17.46	0.875/ 22.23	0.594/15.08	1-6 oz. in.	300°
E REE	12.5	1.0-15K	enclosed	305	1.219/30.96	1.047/ 26.59	—	1-6 oz. in.	300°

• See Catalog #203 for complete details.

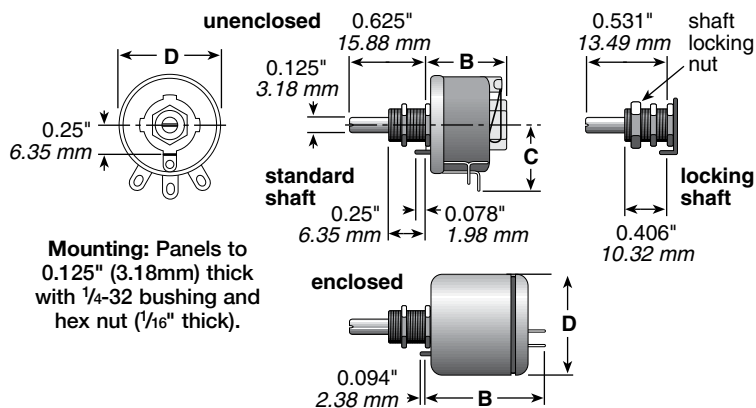

Dimensions for reference only; consult factory for details.

Since all rheostats/potentiometers are electro-mechanical devices, they are subject to mechanical wear and, therefore, have a finite life.

Models H, J, K, L and N are listed under UL File No. E-10946 and CSA File No. 21309 unless noted otherwise.

All rheostats are 10% tolerance.


Rheostats

(Potentiometers) Wirewound

MODELS H, J, G, K, L

Model Type	Watts	Ohmic range	Core	Max. Voltage (RMS)*	Behind panel "B" (in./mm)	Diameter "D" (in./mm)	Dimension "C" (in./mm)	Shaft torque	Rotation (±5°)
H RHS/RHL	25	1.0-25K	open	500	1.375/34.93	1.560/ 39.62	0.940/23.88	0.25-0.5 lb. in.	300°
J RJS	50	0.5-50K	open	750	1.375/34.93	2.31 / 58.67	1.56 /39.62	0.25-2 lb. in.	300°
G RGS	75	0.5-50K	open	900	1.750/44.45	2.75 / 69.25	1.78 /45.21	0.5-2 lb. in.	300°
K RKS	100	0.5-50K	open	1000	1.750/44.45	3.125/ 79.38	1.91 /48.51	0.5-2 lb. in.	300°
L RLS	150	0.5-50K	open	1200	2.000 / 50.8	4.00 /101.60	2.28 /57.91	0.5-3 lb. in.	300°


- Models H, J, G, and K also available in enclosed versions.
- See Catalog #203 for complete details.

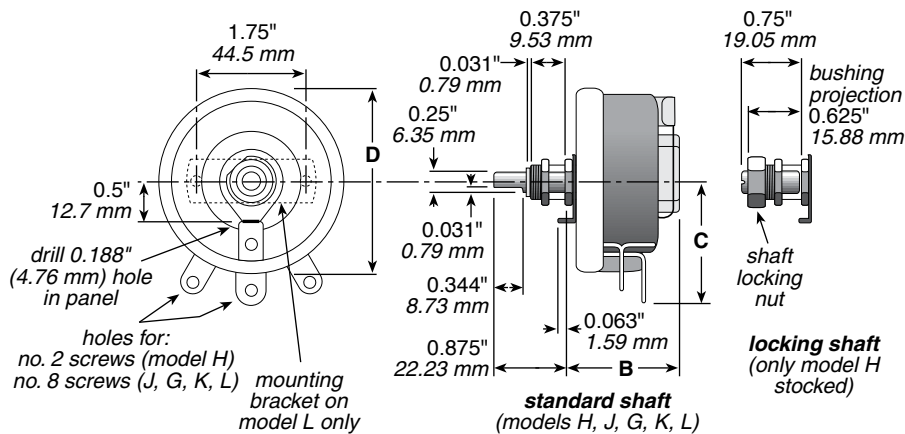

MODELS P, N, R, U

Model Type	Watts	Ohmic range	Core	Max. Voltage (RMS)*	Behind panel "B" (in./mm)	Diameter "D" (in./mm)	Dimension "C" (in./mm)	Shaft torque	Rotation (±5°)
P RPS	225	1.0-30K	open	1300	2.125/53.98	5.00 /127.00	2.97 /75.44	2.5-4 lb. in.	310°
N RNS	300	1.0-50K	open	1225	2.375/60.33	6.00 /152.40	3.44 /87.38	2.5-5 lb. in.	320°
R RRS	500	1.0-20K	open	1450	2.125/53.98	8.00 /203.20	4.31/109.47	4.5-7 lb. in.	325°
U RUS	1000	1.0-20K	open	1600	3.000 / 76.2	12.00 /304.80	6.38/162.05	3.5-7 lb. in.	335°

- See Catalog #203 for complete details.

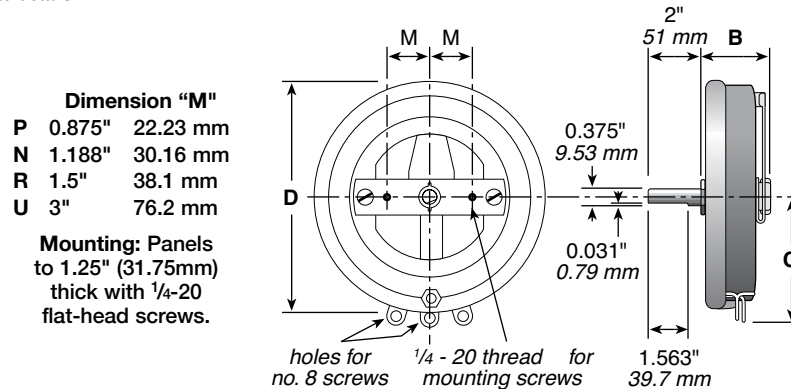


(continued)

Rheostats

(Potentiometers) Wirewound

ORDERING INFORMATION

Code	Watts	Model	Shaft	Core
CL	7.5	C	Locking	Enclosed
CS	7.5	J	Standard	Enclosed
EE	12.5	C	Standard	Enclosed
EL	12.5	J	Locking	Open
ES	12.5	C	Standard	Open
GS	75	J	Standard	Open
HL	25	H	Locking	Open
HS	25	H	Standard	Open
JS	50	J	Standard	Open
KS	100	K	Standard	Open
LS	150	L	Standard	Open
NS	300	N	Standard	Open
PS	225	P	Standard	Open
RS	500	R	Standard	Open
US	1000	U	Standard	Open



Resistance Value*

Example:
 R50 = 0.50Ω
 1R0 = 1Ω
 7R5 = 7.5Ω
 250 = 250Ω
 1K0 = 1,000Ω
 1K75 = 1,750Ω
 4K5 = 4,500Ω
 50K = 50,000Ω

- RoHS compliant product available. Add "E" suffix to part number to specify.
- Made-to-order rheostats available: Contact nearest Ohmite sales office.
- * Voltage rating dependent on resistance value.

*Check table for standard resistance values and maximum current values

Ohmic value	Part No. Prefix Suffix	7.5W Model C			12.5W Model E			25W Model H			50W Model J	75W Model G	100W Model K	150W Model L	225W Model P	300W Model N	500W Model R	1000W Model U							
		RCS	RCL	Amps max.	RES	REL	REE	Amps max.	RHS	RHL	Amps max.	RJS	Amps max.	RGS	Amps max.	RKS	Amps max.	RLS	Amps max.	RPS	Amps max.	RNS	Amps max.	RRS	Amps max.
0.5	—R50			✓	✓	✓	3.53	✓	✓	5.00	✓	12.3	✓	17.3	✓	15.0	✓	22.3	✓	31.6					
1	—1R0			✓	✓	✓	2.50	✓	✓	3.54	✓	8.66	✓	12.3	✓	10.6	✓	18.2	✓	25.8					
1.5	—1R5			✓	✓	✓	2.24	✓	✓	2.88	✓	6.12	✓	7.07	✓	8.65	✓	15.8	✓	22.4					
2	—2R0			✓	✓	✓	2.04	✓	✓	2.04	✓	5.00	✓	5.75	✓	6.71	✓	14.1	✓	20.0					
2.5	—2R5			✓	✓	✓	1.58	✓	✓	2.04	✓	3.88	✓	4.47	✓	5.48	✓	12.9	✓	18.3					
3	—3R0			✓	✓	✓	1.44	✓	✓	2.04	✓	3.16	✓	3.65	✓	4.47	✓	11.2	✓	15.8					
4	—4R0			✓	✓	✓	1.25	✓	✓	1.77	✓	2.50	✓	2.50	✓	3.163	✓	10.0	✓	14.1					
5	—5R0			✓	✓	✓	1.12	✓	✓	1.58	✓	1.76	✓	1.73	✓	2.450	✓	8.66	✓	11.2					
6	—6R0			✓	✓	✓	0.91	✓	✓	1.29	✓	1.50	✓	2.0	✓	2.070	✓	7.50	✓	10.0					
7.5	—7R5			✓	✓	✓	0.71	✓	✓	0.845	✓	1.19	✓	2.450	✓	2.070	✓	6.71	✓	8.95					
8	—8R0	✓	✓	0.86	✓	✓	0.71	✓	✓	1.00	✓	1.73	✓	2.50	✓	3.00	✓	5.49	✓	7.90					
10	—10R	✓	✓	0.86	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	4.74	✓	5.48					
12	—12R			✓	✓	✓	0.91	✓	✓	1.29	✓	1.76	✓	2.0	✓	2.450	✓	3.88	✓	5.48					
12.5	—12R5			✓	✓	✓	0.91	✓	✓	1.29	✓	1.50	✓	2.0	✓	2.450	✓	3.88	✓	5.48					
15	—15R	✓	✓	0.71	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	4.47	✓	5.48					
16	—16R			✓	✓	✓	0.71	✓	✓	1.00	✓	1.73	✓	2.50	✓	3.00	✓	3.87	✓	4.47					
22	—22R			✓	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	3.87	✓	4.47					
25	—25R	✓	✓	0.55	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	3.87	✓	4.47					
35	—35R	✓	✓	0.46	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	3.87	✓	4.47					
40	—40R			✓	✓	✓	0.60	✓	✓	0.845	✓	1.19	✓	2.450	✓	3.00	✓	3.87	✓	4.47					
50	—50R	✓	✓	0.39	✓	✓	0.50	✓	✓	0.707	✓	1.00	✓	1.23	✓	1.41	✓	3.54	✓	4.47					
75	—75R	✓	✓	0.32	✓	✓	0.40	✓	✓	0.575	✓	0.790	✓	1.00	✓	1.15	✓	3.16	✓	3.65					
80	—80R			✓	✓	✓	0.40	✓	✓	0.575	✓	0.790	✓	1.00	✓	1.15	✓	2.52	✓	3.16					
100	—100	✓	✓	0.27	✓	✓	0.36	✓	✓	0.500	✓	0.630	✓	0.866	✓	1.00	✓	2.00	✓	3.16					
125	—125			✓	✓	✓	0.32	✓	✓	0.445	✓	0.630	✓	0.866	✓	1.00	✓	2.00	✓	3.16					
150	—150	✓	✓	0.22	✓	✓	0.29	✓	✓	0.470	✓	0.575	✓	0.707	✓	0.865	✓	1.69	✓	2.39					
160	—160			✓	✓	✓	0.29	✓	✓	0.470	✓	0.575	✓	0.707	✓	0.865	✓	1.69	✓	2.39					
175	—175			✓	✓	✓	0.27	✓	✓	0.375	✓	0.470	✓	0.612	✓	0.707	✓	1.69	✓	2.39					
200	—200	✓	✓	0.19	✓	✓	0.25	✓	✓	0.375	✓	0.470	✓	0.612	✓	0.707	✓	1.69	✓	2.39					
225	—225			✓	✓	✓	0.25	✓	✓	0.375	✓	0.470	✓	0.612	✓	0.707	✓	1.69	✓	2.39					
250	—250	✓	✓	0.17	✓	✓	0.22	✓	✓	0.316	✓	0.408	✓	0.500	✓	0.575	✓	1.41	✓	1.83					
300	—300			✓	✓	✓	0.22	✓	✓	0.316	✓	0.408	✓	0.500	✓	0.575	✓	1.41	✓	1.83					
325	—325			✓	✓	✓	0.19	✓	✓	0.267	✓	0.408	✓	0.500	✓	0.575	✓	1.41	✓	1.83					
350	—350	✓	✓	0.15	✓	✓	0.19	✓	✓	0.267	✓	0.408	✓	0.500	✓	0.575	✓	1.41	✓	1.83					
400	—400			✓	✓	✓	0.19	✓	✓	0.267	✓	0.408	✓	0.500	✓	0.575	✓	1.41	✓	1.83					
500	—500	✓	✓	0.12	✓	✓	0.16	✓	✓	0.222	✓	0.316	✓	0.388	✓	0.447	✓	1.00	✓	1.41					
600	—600			✓	✓	✓	0.16	✓	✓	0.222	✓	0.316	✓	0.388	✓	0.447	✓	1.00	✓	1.41					
700	—700			✓	✓	✓	0.16	✓	✓	0.222	✓	0.316	✓	0.388	✓	0.447	✓	1.00	✓	1.41					
750	—750	✓	✓	0.10	✓	✓	0.13	✓	✓	0.182	✓	0.250	✓	0.316	✓	0.365	✓	0.817	✓	1.15					
800	—800			✓	✓	✓	0.13	✓	✓	0.182	✓	0.250	✓	0.316	✓	0.365	✓	0.817	✓	1.15					
900	—900			✓	✓	✓	0.13	✓	✓	0.182	✓	0.250	✓	0.316	✓	0.365	✓	0.817	✓	1.15					
1000	—1K0	✓	✓	0.086	✓	✓	0.10	✓	✓	0.155	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1200	—1K2			✓	✓	✓	0.10	✓	✓	0.155	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1250	—1K25			✓	✓	✓	0.10	✓	✓	0.155	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1500	—1K5	✓	✓	0.071	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1600	—1K6			✓	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1750	—1K75			✓	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
1800	—1K8			✓	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
2000	—2K0			✓	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
2250	—2K25			✓	✓	✓	0.090	✓	✓	0.129	✓	0.224	✓	0.274	✓	0.316	✓	0.500	✓	0.578					
2500	—2K5	✓	✓	0.055	✓	✓	0.070	✓	✓	0.100	✓	0.141	✓	0.173	✓	0.200	✓	0.300	✓	0.346					
3000	—3K0			✓	✓	✓	0.070	✓	✓	0.100	✓	0.141	✓	0.173	✓	0.200	✓	0.300	✓	0.346					
3500	—3K5	✓	✓	0.046	✓	✓	0.060	✓	✓	0.084	✓	0.119	✓	0.141	✓	0.161	✓	0.224	✓	0.258					
4500	—4K5			✓	✓	✓	0.060	✓	✓	0.084	✓	0.119	✓	0.141	✓	0.161	✓	0.224	✓	0.258					
5000	—5K0	✓	✓	0.039	✓	✓	0.050	✓	✓	0.070	✓	0.100	✓	0.123	✓	0.141	✓	0.182	✓	0.212					
7500	—7K5			✓	✓	✓	0.050	✓	✓	0.070	✓	0.100	✓	0.123	✓	0.141	✓	0.182	✓	0.212					
8000	—8K0			✓	✓	✓	0.041	✓	✓	0.058	✓	0.079	✓	0.100	✓	0.115	✓	0.141	✓	0.161					
10000	—10K			✓	✓	✓	0.041	✓	✓	0.058	✓	0.079	✓	0.100	✓	0.115	✓	0.141	✓	0.161					
12500	—12K5			✓	✓	✓	0.035	✓	✓	0.050	✓	0.070	✓	0.087	✓	0.100	✓	0.122	✓	0.141					
15000	—15K			✓	✓	✓	0.031	✓	✓	0.041	✓	0.058	✓	0.070	✓	0.087	✓	0.100	✓	0.122					
20000	—20K			✓	✓	✓	0.029	✓	✓	0.032	✓	0.041	✓	0.050	✓	0.058	✓	0.070	✓	0.087					
25000	—25K			✓	✓	✓	0.029	✓	✓	0.032	✓	0.041	✓	0.050	✓	0.058	✓	0.070	✓	0.087					
30000	—30K			✓	✓	✓	0.029	✓	✓	0.032	✓	0.041	✓	0.050	✓	0.058	✓	0.070	✓	0.087					
40000	—40K			✓	✓	✓	0.029	✓	✓	0.032	✓	0.041	✓	0.050	✓	0.058	✓	0.070	✓	0.087					
50000	—50K			✓	✓	✓	0.029	✓	✓	0.032	✓	0.041	✓	0.050	✓	0.058	✓	0.070	✓	0.087					

✓ = Standard values; check availability
 Rheostats are silicone-ceramic coated at and above the following ohmic values:
 Model C: all
 Model E: 750Ω
 Model H: 2000Ω
 Model J: 5000Ω
 Model G: 5000Ω
 Model K: 5000Ω
 Model L: 7500Ω