



HIGH VOLTAGE HIGH CURRENT MINIATURE RECTIFIERS

- SMALL SIZE MOLDED PACKAGES
- PRV 1,000 TO 12,000 VOLTS
- FAST RECOVERY (R_ SERIES)
- AVALANCHE CHARACTERISTICS



EDI Type No.	Peak Reverse Voltage PRV(Volts)	Avg.Fwd.Current I _o at 50°C (mA) FIG.1	Max.Fwd Voltage Drop at 25°C and I _o V _F (Volts)	Max. Peak Surge Current, I _{FSM} (8.3 ms) (Amps) FIG.2	Repetitive Peak Forward Current I _{FRM} (Amps)
STANDARD RECOVERY					
EF100	1,000	600	2.0	35	8.0
EF150	1,500	600	2.0	35	8.0
EF200	2,000	600	2.0	35	8.0
EG200	2,000	400	3.0	30	6.0
EG250	2,500	400	3.0	30	6.0
EG300	3,000	400	3.0	30	6.0
EH300	3,000	300	4.0	25	5.0
EH350	3,500	300	4.0	25	5.0
EH400	4,000	300	4.0	25	5.0
EK450	4,500	200	6.0	15	3.0
EK500	5,000	200	6.0	15	3.0
EK600	6,000	200	6.0	15	3.0
EM700	7,000	175	8.0	12	2.5
EM800	8,000	175	8.0	12	2.5
EP900	9,000	150	10.0	10	2.0
EP1000	10,000	150	10.0	10	2.0
ER1100	11,000	100	12.0	8	1.5
ER1200	12,000	100	12.0	8	1.5
250 NANOSECOND RECOVERY (FIG.4)					
RF160B	1,600	500	2.6	25	8.0
RF200B	2,000	500	2.6	25	8.0
RG300B	3,000	350	3.9	20	6.0
RK300B	3,000	150	7.8	10	3.0
RK400B	4,000	150	7.8	10	3.0
RK500B	5,000	150	7.8	10	3.0
RK600B	6,000	150	7.8	10	3.0
RM700B	7,000	125	10.4	8	2.0
RM800B	8,000	125	10.4	8	2.0
RP900B	9,000	100	13.0	7	1.5
RP1000B	10,000	100	13.0	7	1.5
RR1100B	11,000	80	15.6	6	1.0
RR1200B	12,000	80	15.6	6	1.0
150 NANOSECOND RECOVERY (FIG.4)					
RF160A	1,600	500	2.6	25	8.0
RF200A	2,000	500	2.6	25	8.0
RG300A	3,000	350	3.9	20	6.0
RK300A	3,000	150	7.8	10	3.0
RK400A	4,000	150	7.8	10	3.0
RK500A	5,000	150	7.8	10	3.0
RK600A	6,000	150	7.8	10	3.0
RM800A	8,000	125	10.4	8	2.0
RP1000A	10,000	100	13.0	7	1.5
RR1200A	12,000	80	15.6	6	1.0

EDI reserves the right to change these specifications at any time without notice

EF to RR

ELECTRICAL CHARACTERISTICS (at $T_A = 25^\circ\text{C}$ Unless Otherwise Specified)

Max. DC Reverse Current @ PRV and 25°C , I_R	2 μA
Max. DC Reverse Current @ PRV and 100°C , I_R	50 μA
Ambient Operating Temperature Range, T_A	-55°C to $+150^\circ\text{C}$
Storage Temperature Range, T_{STG}	-55°C to $+150^\circ\text{C}$

FIG.1

OUTPUT CURRENT vs AMBIENT TEMPERATURE

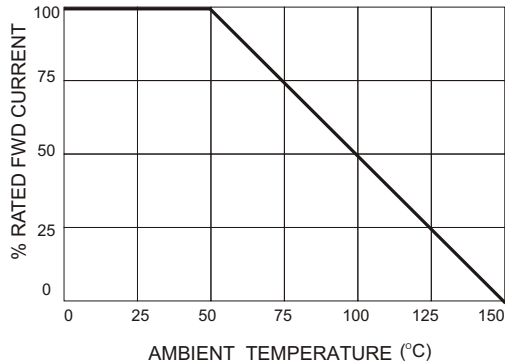


FIG.2

NON-REPETITIVE SURGE CURRENT


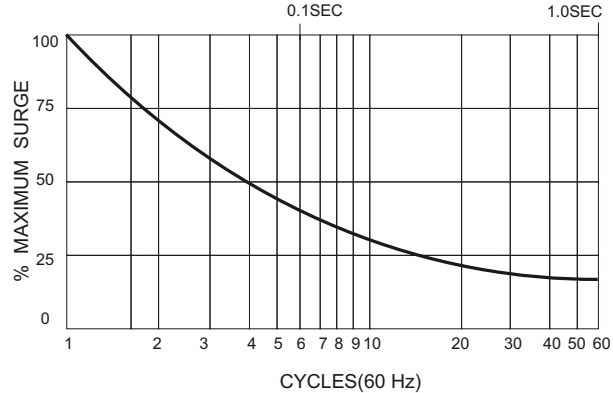


FIG.3

MECHANICAL DIMENSIONS

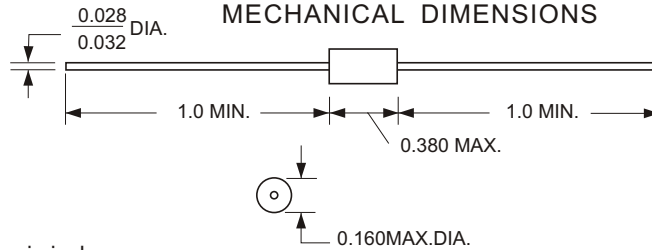



All dimensions in inches

Maximum lead and terminal temperature for soldering, 3/8 inch form case, 5 seconds at 250°C

FIG.4

TEST CIRCUIT

TYPICAL REVERSE RECOVERY WAVEFORM

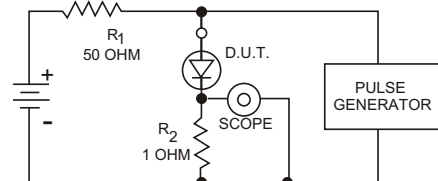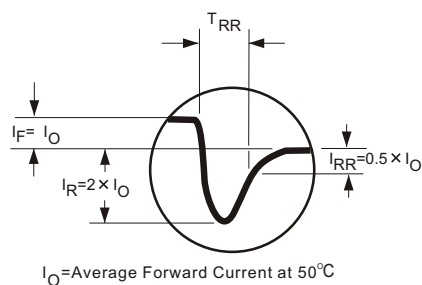

R_1, R_2 NON-INDUCTIVE RESISTORS
 PULSE GENERATOR-HEWLETT PACKARD 214A OR EQUIV
 1KC REP.RATE, 10μ SEC. PULSE WIDTH
 ADJUST PULSE AMPLITUDE FOR PEAK I_R

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

21 GRAY OAKS AVENUE * YONKERS, NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828

e-mail:sales@edidiodes.com * website: <http://www.edidiodes.com>