



## 塑封肖特基二极管


反向电压 20 ~ 200 V

正向电流 3.0 A

## Schottky Barrier Plastic Rectifiers

Reverse Voltage 20 ~ 200 V

Forward Current 3.0 A

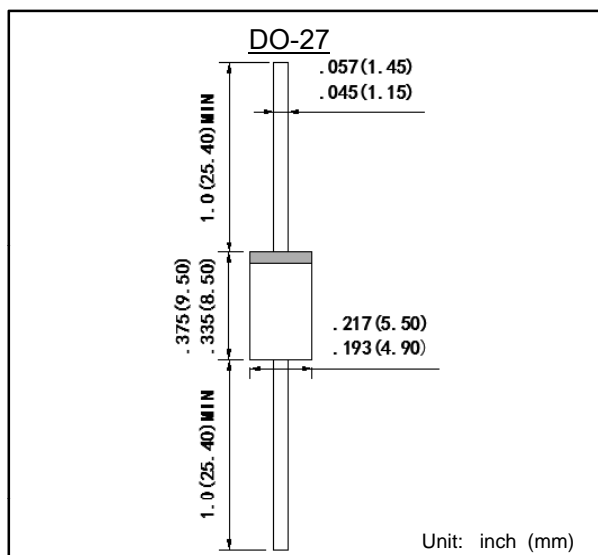

## 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)  
260°C/10seconds,9.5mm lead length
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

## 机械数据 Mechanical Data

- 封装外形:DO-27 塑封 Case:DO-27 Molded plastic
- 环氧树脂:UL易燃等级:94V-0  
Epoxy:UL 94V-0 rate flame retardant
- 引脚:镀锡,无铅 Lead: Pure tin plated, lead free

## 最大值和特性 TA = 25°C 除非另有规定。

## Maximum Ratings &amp; Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	SB 320	SB 340	SB 360	SB 380	SB 3100	SB 3150	SB 3200	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	20	40	60	80	100	150	200	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	105	140	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	20	40	60	80	100	150	200	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	3.0							A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	$I_{FSM}$	80							A
最大正向电压 @ $I_F=3.0A$ Maximum forward voltage	$V_F$	0.50	0.70	0.85	0.92	0.95			V
最大反向电流 @ $V_{DC}$ Maximum reverse current	$I_R$	100			50				$\mu A$
TA= 25°C TA= 100°C		20			10				mA
典型热阻 Typical thermal resistance (Note 1)	$R_{\theta JA}$	20							°C/W
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	$C_j$	150							pF
工作结温和存储温度 Operating junction and storage temperature rang	$T_j, T_{STG}$	-55 --- +125			-55 --- +150				°C


备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上, 从PN结到周围环境的热阻。


1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)  
TYPICAL FORWARD CHARACTERISTIC

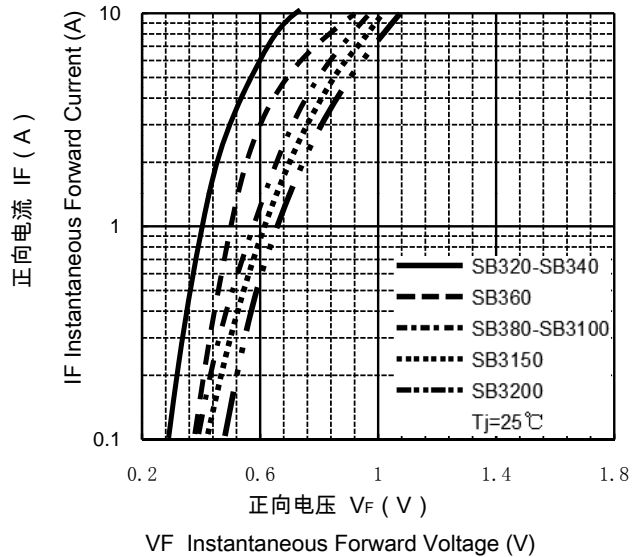

正向电流降额曲线  
FORWARD CURRENT DERATING CURVE

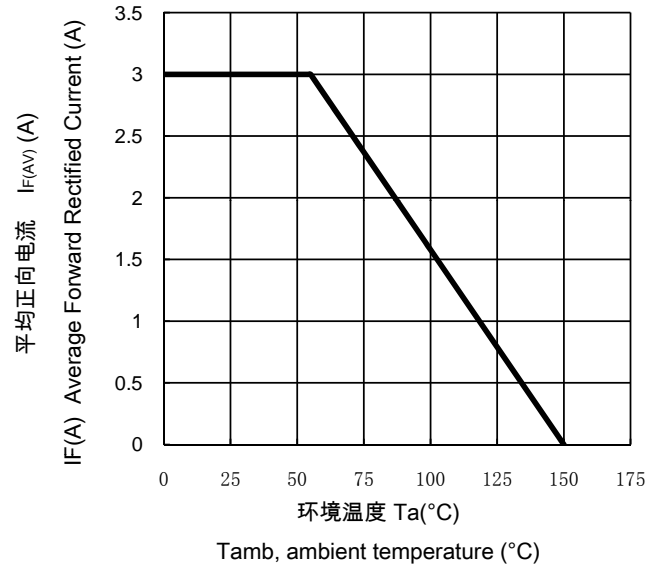

浪涌特性曲线 (最大值)  
MAXIMUM NON REPETITIVE  
PEAK FORWARD SURGE CURRENT

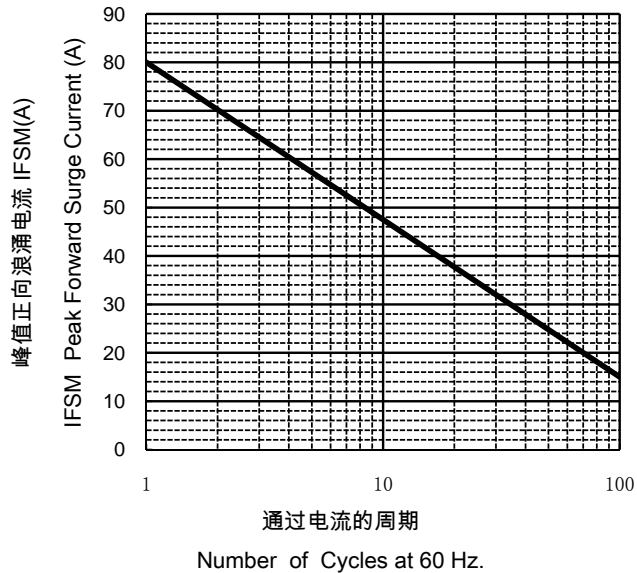

反向特性曲线  
Typical Reverse Characteristics

