

Schottky Barrier Rectifier


SBR6100CTL

FEATURES

- With TO-252(DPAK) packaging
- Low power loss
- High efficiency
- High frequency operation
- High surge capacity
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


APPLICATIONS

- Switching power supply
- High frequency inverters
- Freewheeling diodes
- Reverse battery protection
- Polarity protection applications

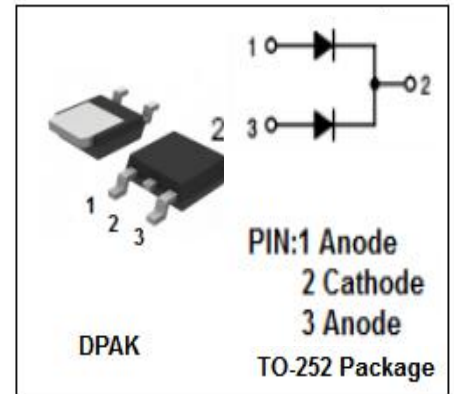

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{RRM} V _{RMS} V _R	Peak Repetitive Reverse Voltage RMS Voltage DC Blocking Voltage	100	V
I _{F(AV)}	Average Rectified Forward Current @T _c =115°C	6	A
I _{F(RMS)}	Forward rms current@T _c =135°C	12	A
I _{FSM}	Nonrepetitive Peak Surge Current (8.3ms single half sine-wave superimposed on rated load conditions)	78	A
T _J	Junction Temperature	-65~150	°C
T _{stg}	Storage Temperature Range	-65~150	°C

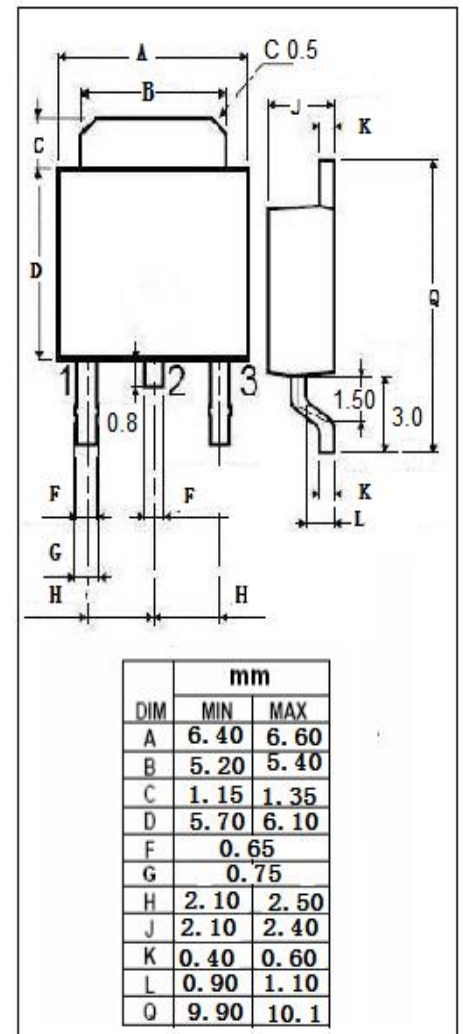

Schottky Barrier Rectifier**SBR6100CTL****THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.6	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS (Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	$I_F = 3A ; T_C = 25^{\circ}C$	0.74	V
		$I_F = 3A ; T_C = 125^{\circ}C$	0.62	
I_R	Maximum Instantaneous Reverse Current	$V_R = \text{rated } V_{RRM} ; T_C = 25^{\circ}C$	0.2	mA
		$V_R = \text{rated } V_{RRM} ; T_C = 125^{\circ}C$	15	