



DATA SHEET

SD820CS~SD8100CS

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 100 Volts **CURRENT** 8 Amperes


TO-252 / DPAK Unit : inch (mm)

FEATURES

- For surface mounted applications
- Low power loss, High efficiency
- Built-in strain relief
- Easy pick and place
- High surge capacity
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above

MECHANICAL DATA

Case: D PAK/TO-252 molded plastic
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode
Standard packaging: 16mm tape (EIA-481)
Weight: 0.015 ounce, 0.4 gram.

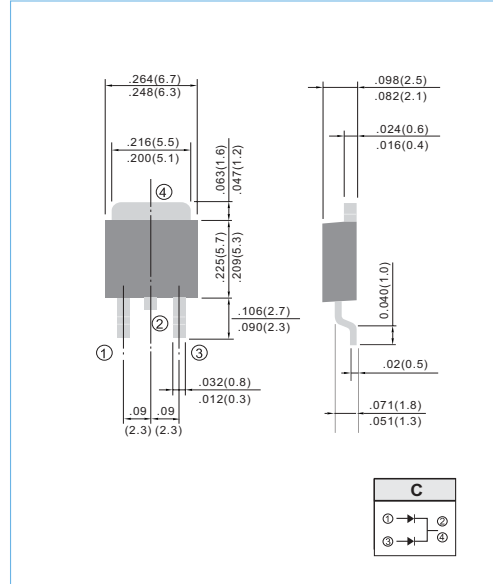

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SD820 CT	SD830 CT	SD840 CT	SD860 CT	SD880 CT	SD8100 CT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	60	80	100	V
Maximum RMS Voltage	V_{RMS}	14	21	28	42	56	70	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	60	80	100	V
Maximum Average Forward Rectified Current .at $T_c = 85^\circ C$	I_{AV}	8						A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	85						A
Maximum Instantaneous Forward Voltage at 4.0A (Note 1)	V_F	0.55		0.75		0.85		V
Maximum DC Reverse Current $TC=25^\circ C$ at Rated DC Blocking Voltage $TC=100^\circ C$	I_R	0.2 20						mA
Maximum Thermal Resistance	$R_{\theta JC}$ $R_{\theta JA}$	3.0 80						$^\circ C / W$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-50 TO +125						$^\circ C$



RATING AND CHARACTERISTIC CURVES

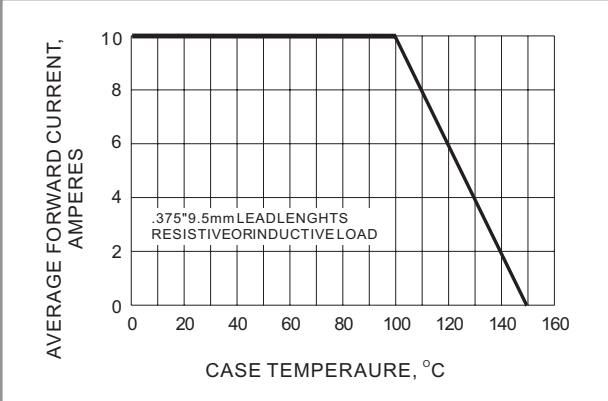


Fig.1- FORWARD CURRENT DERATING CURVE

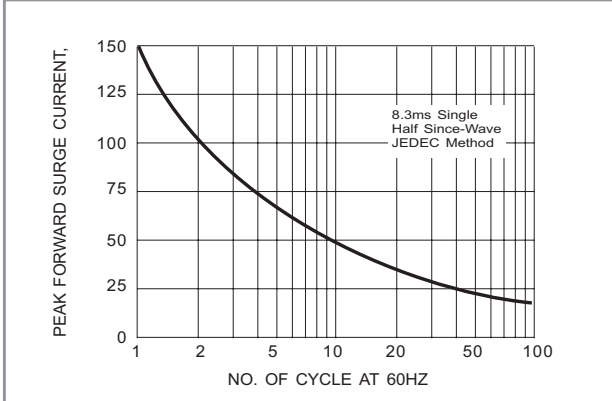


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

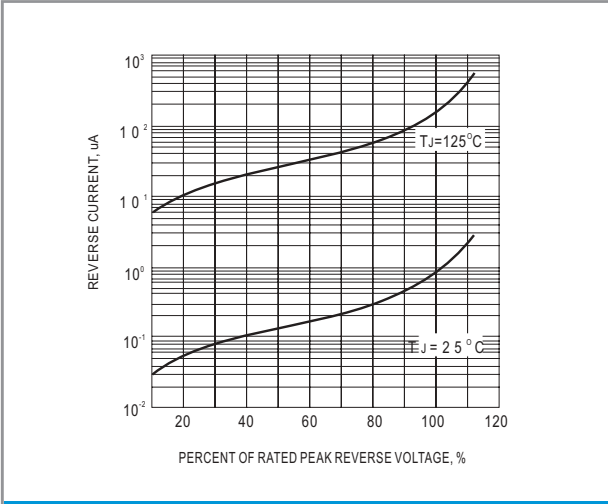


Fig.3- TYPICAL REVERSE CHARACTERISTIC

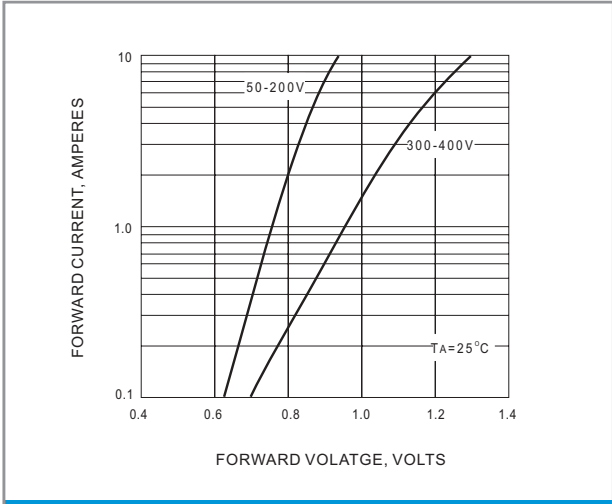


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC