

SF11G - SF18G

1.0 AMP. Glass Passivated Super Fast Rectifiers

DO-41




Features

- ✧ High efficiency, low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375"(.95mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Mounting position: Any
- ✧ Weight: 0.35 grams

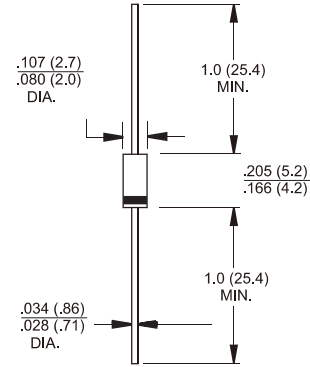

Dimensions in inches and (millimeters)

Marking Diagram



- SFXXG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	SF 11G	SF 12G	SF 13G	SF 14G	SF 15G	SF 16G	SF 17G	SF 18G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T _A = 55 °C	I _{F(AV)}	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30								A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	0.95			1.3		1.7			V
Maximum DC Reverse Current at @ T _A =25°C Rated DC Blocking Voltage(Note 1)@ T _A =125°C	I _R					5.0				uA
						100				uA
Maximum Reverse Recovery Time (Note 2)	T _{rr}					35				nS
Typical Junction Capacitance (Note 3)	C _j	20			10					pF
Typical Thermal Resistance (Note 4)	R _{θJA} R _{θJL}					80				°C/W
						20				°C/W
Operating Temperature Range	T _J	-65 to +150								°C
Storage Temperature Range	T _{STG}	-65 to +150								°C

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 4. Mount on Cu-Pad Size 5mm x 5mm on PCB.

RATINGS AND CHARACTERISTIC CURVES (SF11G THRU SF18G)

FIG.1- MAXIMUM AVERAGE FORWARD CURRENT DERATING

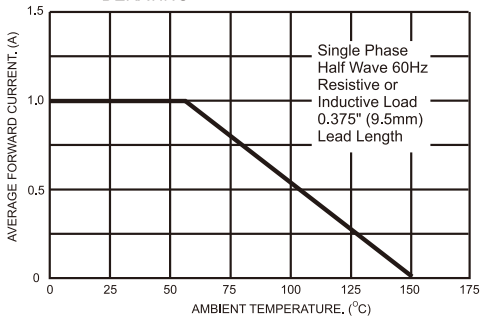


FIG.2- TYPICAL REVERSE CHARACTERISTICS

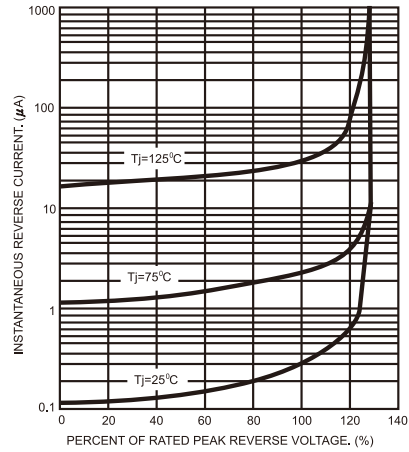


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

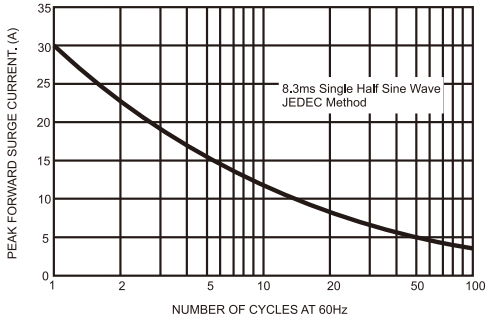


FIG.5- TYPICAL FORWARD CHARACTERISTICS

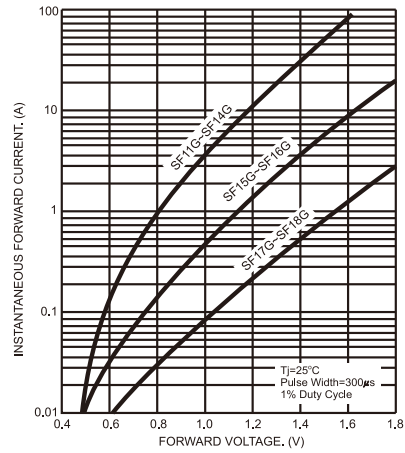


FIG.4- TYPICAL JUNCTION CAPACITANCE

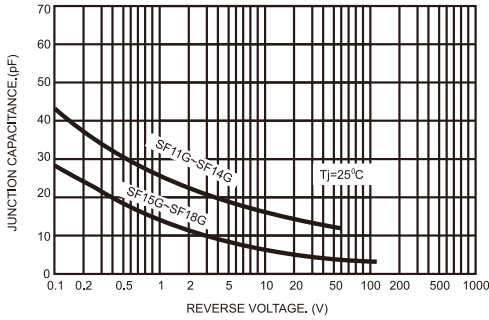


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

