



SUPER FAST RECTIFIER

SF81 THRU SF86


VOLTAGE RANGE	50 to 400 Volts
CURRENT	8.0 Ampere

FEATURES

- Glass passivated chip junction
- Low power loss, high efficiency
- Low leakage
- Super fast switching speed
- High current capacity, high surge capacity
- High temperature soldering guaranteed
- 200°C/10 second, 0.16" (4.06mm) lead length from case
- Also available in reverse polarity, add the "R" Suffix, i.e. SF81R
- Also available in isolated package under part number SFF81

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color Band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.08ounce, 2.24 gram

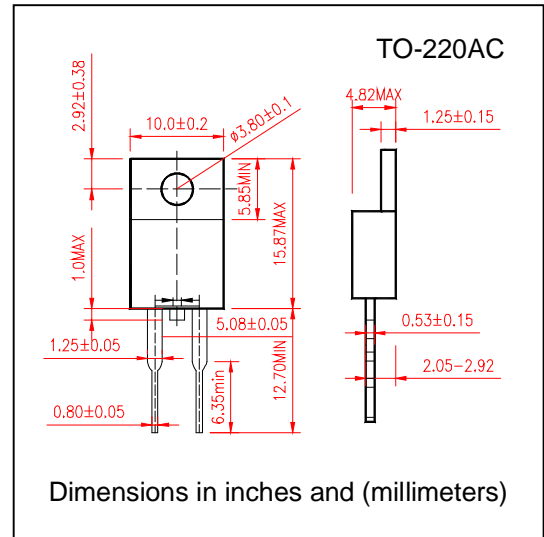

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SF81	SF82	SF83	SF84	SF85	SF86	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	Volts
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current At $T_c=105^\circ\text{C}$	$I_{(AV)}$	8.0						Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	125						Amps
Maximum Instantaneous Forward Voltage at 8.0A	V_F	0.975			1.4			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage	I_R	$T_A = 25^\circ\text{C}$	10					μA
		$T_A = 125^\circ\text{C}$	500					
Maximum Reverse Recovery Time Test conditions $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$	t_{rr}	35			50			nS
Typical Junction Capacitance (Note 2)	C_J	40						pF
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	2.5						$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-55 to +150)						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-55 to +150)						$^\circ\text{C}$

Notes:

1. Unit mounted on heatsink
2. measured at 1.0MHz and applied reverse voltage of 4.0V

SF81 THRU SF86

VOLTAGE RANGE 50 to 400 Volts
 CURRENT 8.0 Ampere

RATING AND CHARACTERISTIC CURVES SF81 THRU SF86

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

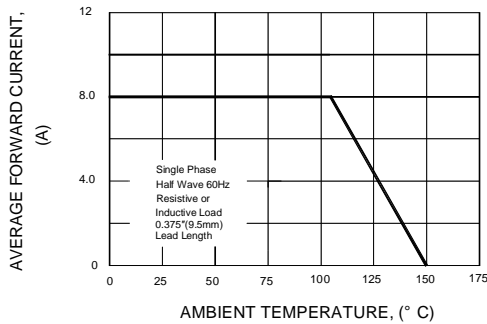


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

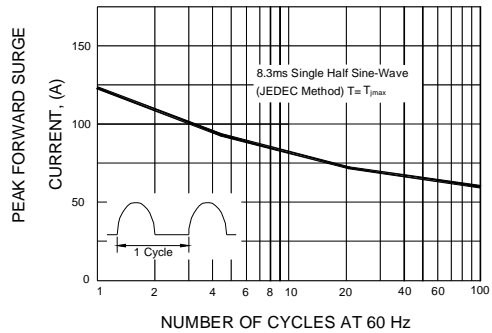


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

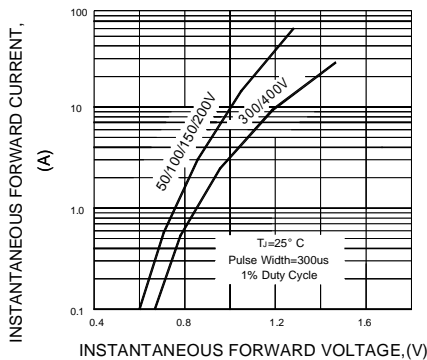


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER LEG

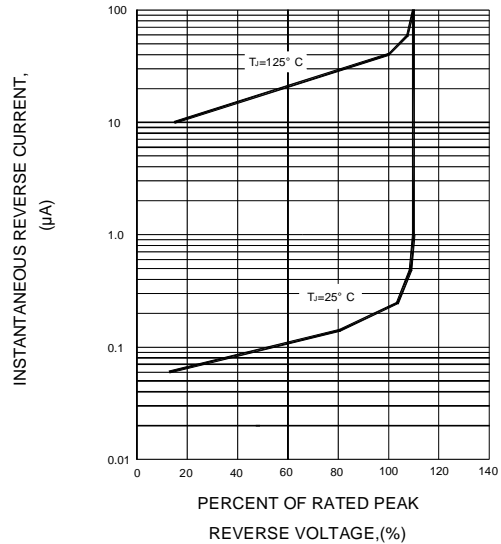


FIG.5-TYPICAL JUNCTION CAPACITANCE

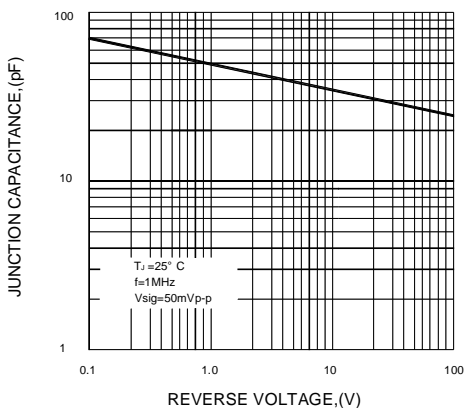


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

