

SML-A1 Series

EXCELED™

1611 (0605)
1.6 × 1.15mm (t=0.55mm)

Features

- Side-view type
- 1.6 × 1.15mm, t=0.55mm




Specifications



Part No.	Chip Structure	Emitting Color	Absolute Maximum Ratings (Ta=25°C)					Electrical and Optical Characteristics (Ta=25°C)																								
			Power Dissipation Pd (mW)	Forward Current If (mA)	Peak Forward Current Ifp (mA)	Reverse Voltage Vr (V)	Operating Temperature Topr (°C)	Storage Temperature Tstg (°C)	Forward Voltage Vf (V)	Reverse Current Ir (μA)	Dominant Wavelength λD (nm)			Luminous Intensity Iv (mcd)																		
■ SML-A12V8T	AlGaInP on GaAs	Red	54	20				2.2				625	630	635	16	40																
■ SML-A12U8T												615	620	625				25	63													
■ SML-A12UT(J)												619	624	629						36												
■ SML-A12D8T	AlGaInP on GaAs	Orange	54	20				2.2		10	5	602	605	608	40	100																
■ SML-A12DT(J)												606	609	20				36	20													
■ SML-A12WT(J)												587	590							593	25	63										
■ SML-A12Y8T	AlGaInP on GaAs	Yellow	54	20				2.2				569	572	575	10	25																
■ SML-A12M8T												567	570	573				14	40													
■ SML-A12MT(J)																				557	560	563	2.5	6.3								
■ SML-A12P8T	AlGaInP on GaAs	Green	54	20				2.2		10		557	560	563	2.5	6.3																
■ SMLA12BC7T												InGaN	Blue	66								2.9	5	100	5	465	470	475	5	5.6	16	5
■ SMLA13BDT																										464	476	20				
□ SMLA12WBC7W	InGaN	White	66					2.9	5	10		(x, y) (0.30,0.30)			5	22	56	5														
□ SMLA13WBDW												(x, y) (0.31,0.31)							10	90	180	10										

* 1:Duty 1/10, 1kHz / * 2:Reference

Dimensions

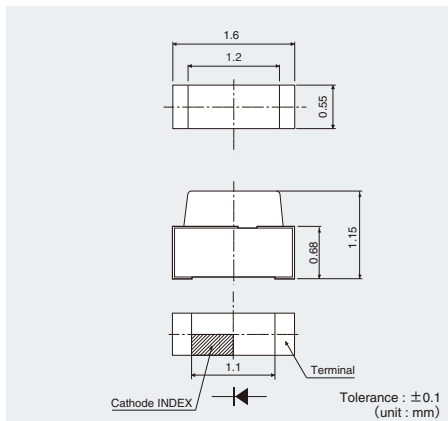


Recommended Solder Pattern Viewing Angle

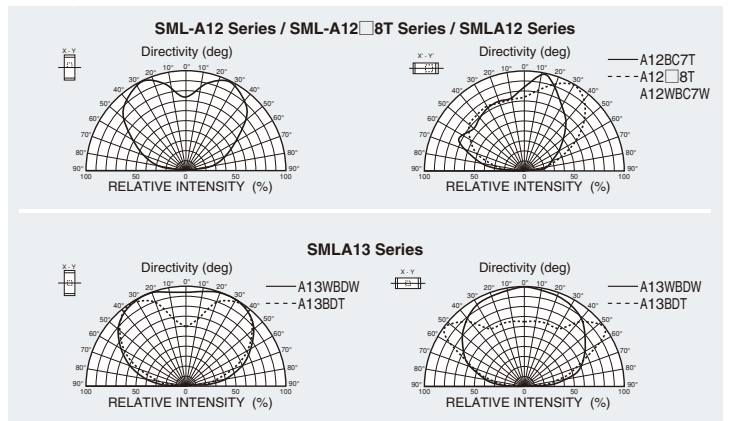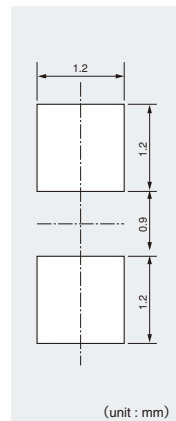


* EXCELED™ is ROHM's pending trademark.

Electrical Characteristics Curves


Forward Current-Forward Voltage

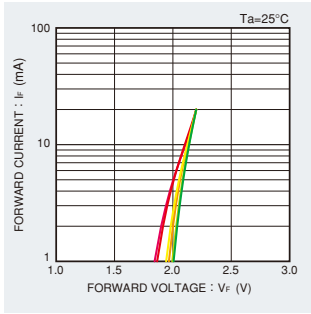

- SML-A12V8T
- SML-A12U8T
- SML-A12D8T
- SML-A12Y8T
- SML-A12M8T
- SML-A12P8T

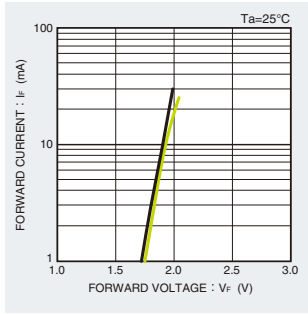


- SML-A12UT(J)
- SML-A12DT(J)
- SML-A12WT(J)
- SML-A12MT(J)

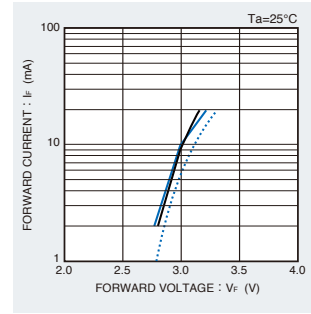


- SMLA12BC7T
- SMLA12WBC7W
- SMLA13BDT
- SMLA13WBDW


Luminous Intensity-Atmosphere Temperature

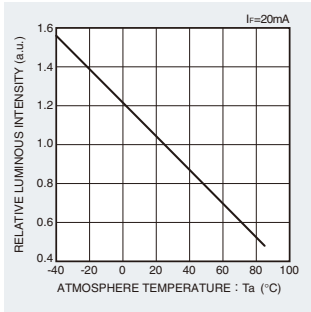

- SML-A12V8T
- SML-A12U8T
- SML-A12D8T
- SML-A12Y8T
- SML-A12M8T
- SML-A12P8T

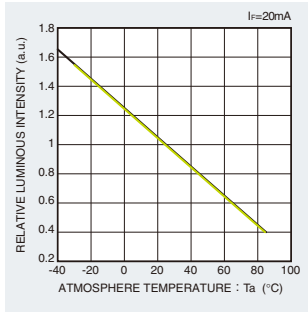


- SML-A12UT(J)
- SML-A12DT(J)
- SML-A12WT(J)
- SML-A12MT(J)

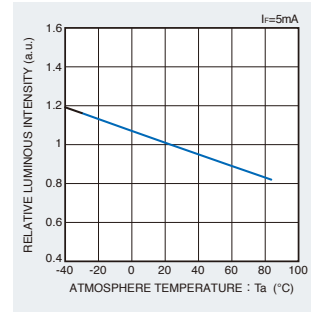


- SMLA13BDT
- SMLA12BC7T
- SMLA12WBC7W
- SMLA13WBDW


Luminous Intensity-Forward Current

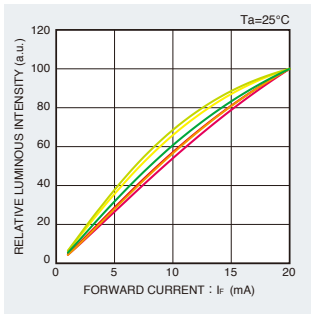

- SML-A12V8T
- SML-A12U8T
- SML-A12D8T
- SML-A12Y8T
- SML-A12M8T
- SML-A12P8T

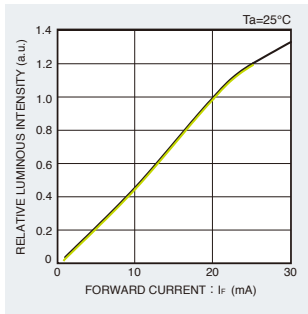


- SML-A12UT(J)
- SML-A12DT(J)
- SML-A12WT(J)
- SML-A12MT(J)

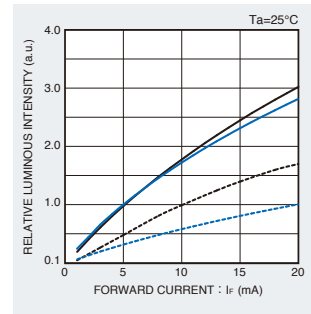


- SMLA12WBC7W
- SMLA12BC7T
- SMLA12WBC7W
- SMLA13WBDW
- SMLA13BDT


Derating

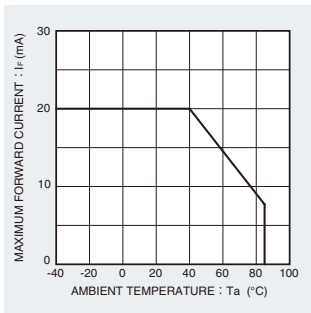

- SML-A12V8T
- SML-A12U8T
- SML-A12D8T
- SML-A12Y8T
- SML-A12M8T
- SML-A12P8T

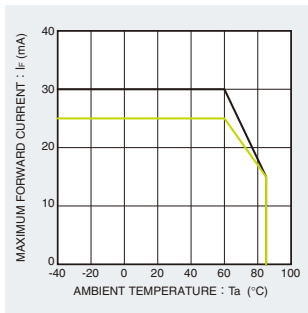

- SML-A12UT(J)
- SML-A12DT(J)
- SML-A12WT(J)
- SML-A12MT(J)

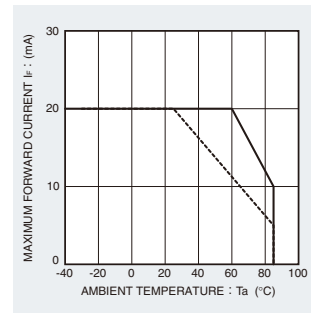

- SMLA12BC7T
- SMLA13BDT
- SMLA12WBC7W
- SMLA13WBDW

SML-A1 Series

Rank Reference of Brightness

Red (V, U)

(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	
		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	
Side View Chip LEDs 16115	0.55									SML-A12V8T								
										SML-A12U8T								
										SML-A12UT*								

Orange (D)

(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	
		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	
Side View Chip LEDs 16115	0.55									SML-A12D8T								
										SML-A12DT*								

Yellow (Y)

(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	
		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	
Side View Chip LEDs 16115	0.55									SML-A12Y8T								
										SML-A12WT*								

Green (M, P)

(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	
		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	
Side View Chip LEDs 16115	0.55									SML-A12MT*								
										SML-A12M8T								
										SML-A12P8T								

Blue (B)

(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	
		0.9 to 1.4	1.4 to 2.2	2.2 to 3.6	3.6 to 5.6	5.6 to 9.0	9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	
Side View Chip LEDs 16115	0.55									SMLA12BC7T**2							
										SMLA13BDT							

White (WB)


(Ta=25°C, If=20mA)

Package size(mm) Height(mm)	Luminous Intensity (mcd)	P	Q	R	S	T	U	V	W	X1	X2	Y1	Y2	Z1	
		25 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1100	1100 to 1400	1400 to 1800	1800 to 2200	2200 to 2800	
Side View Chip LEDs 16115	0.55														
										SMLA13WBDW*1					
										SMLA12WBC7W**2					

**Brightness on specification sheet include tolerance of within ± 10%.
*1: If=10mA *2: If=5mA

Part No. Construction

* "-" will be taken out for emitting color W/B/E series.

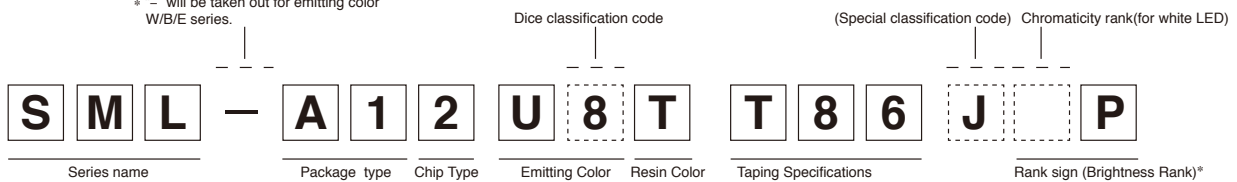

2	High Brightness Type
3	Ultra High Brightness Type

V	Red:630nm
U	Red:620(624)nm
D	Orange:605(606)nm
Y	Yellow:587(590)nm
W	Yellow:590nm
M	Yellowish-Green:572nm
P	Green:560nm
B	Blue:470nm
WB	White

T	Transparent Colorless
W	MilkyWhite

T86	Cathode at sprocket hole side
T87	Reverse of T86
1	For white LED, cathode at sprocket hole side

- * Concerning the Brightness rank
- Please refer to the rank chart above for luminous intensity classification.
- Part name is individual for each rank.
- When shipped as sample, the part name will be a representative part name.
- General products are free of ranks. Please contact sales if rank appointment is needed.

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags. Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request. Please contact the nearest sales office or distributor if necessary.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>