


Voltage-Controlled Oscillator Surface Mount Module

Applications

- Personal Communications Systems
- WLAN
- Portable Radios

Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

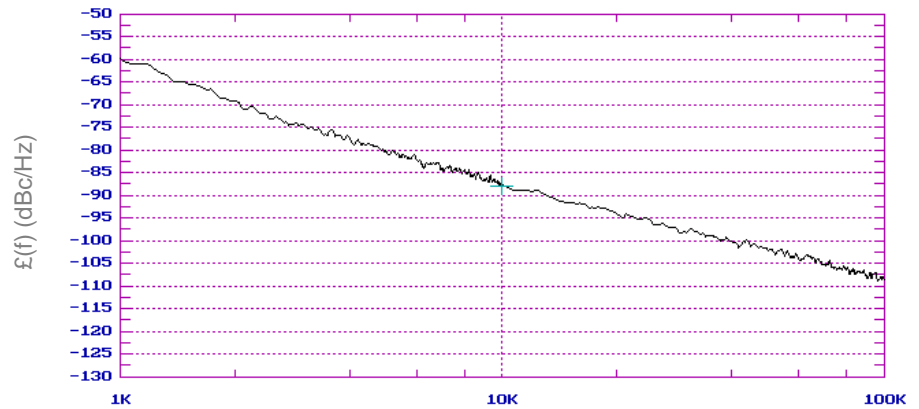


OFFSET (Hz)

Performance Specifications	Min	Typ	Max	Units
Oscillation Frequency Range	2400		2484	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-86		dBc/Hz
Harmonic Suppression (2nd)		-20	-17	dBc
Tuning Voltage	0		3	Vdc
Tuning Sensitivity (avg.)		105		MHz/V
Power Output	8	10.5	13	dBm
Load Impedance		50		Ω
Input Capacitance			50	pF
Pushing			21	MHz/V
Pulling (12 dB Return Loss, Any Phase)			18	MHz
Operating Temperature Range	-40		85	$^{\circ}\text{C}$
Package Style		SUB-L		


Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		3		Vdc
Supply Current (Icc)		20	24	mA

Additional Notes


Tuning Curve, typ.

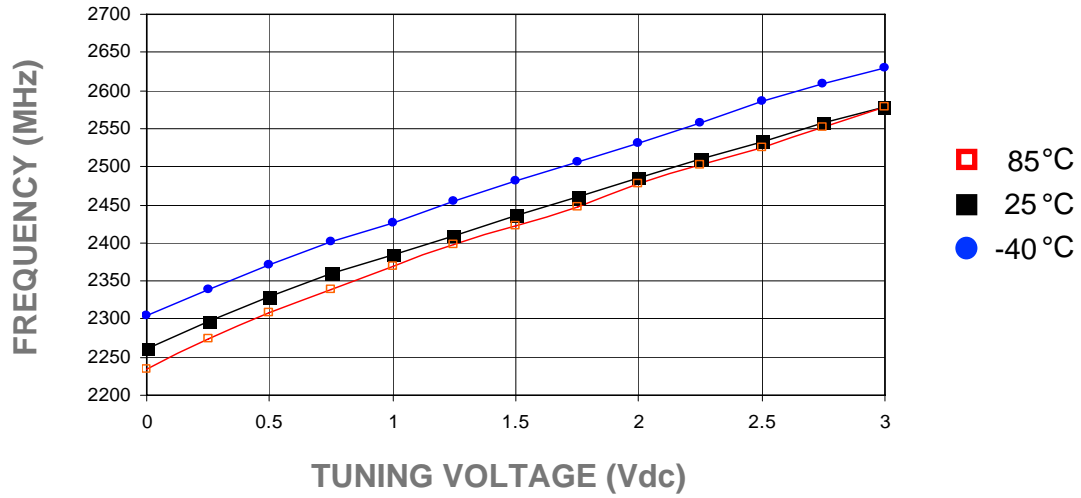


Power Curve, typ.

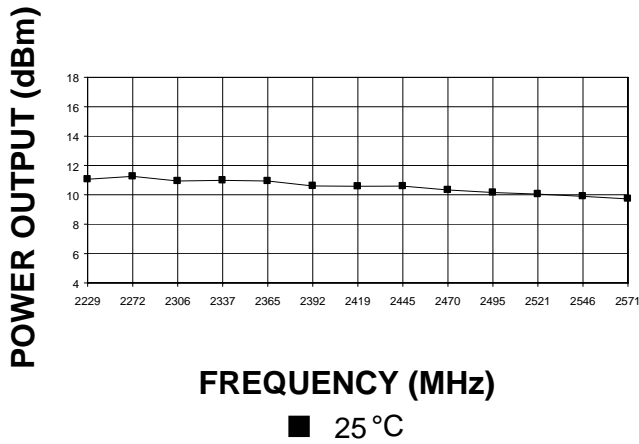

Footprint

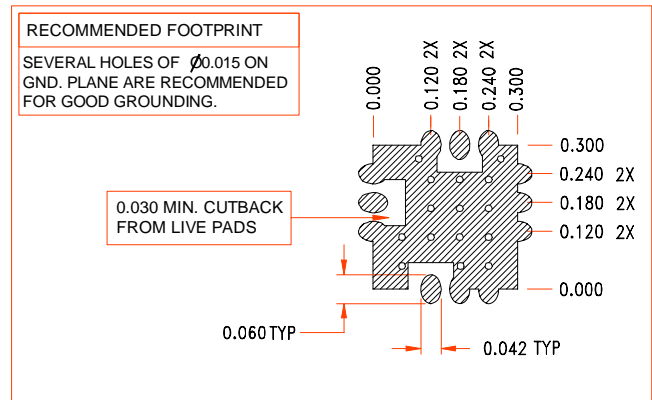

Physical Dimensions

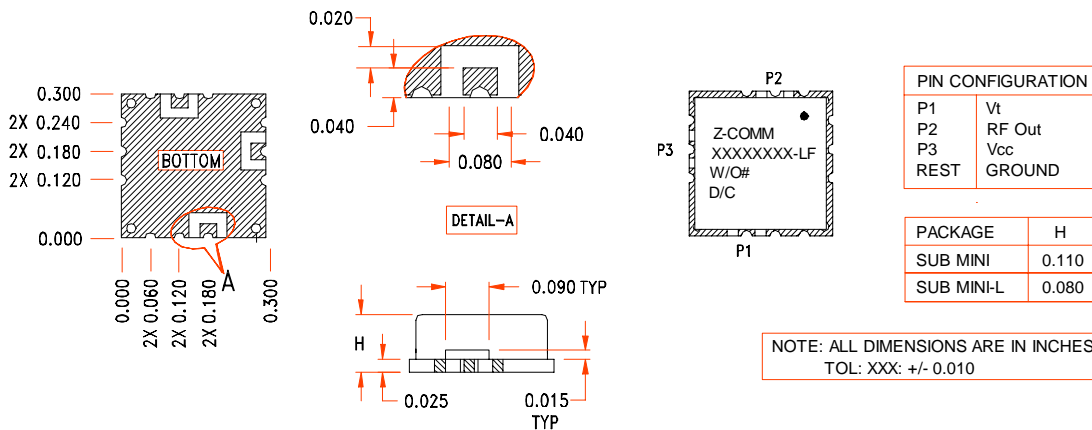

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.