


**10.0AMP SCHOTTKY BARRIER RECTIFIERS
ITO-220 PACKAGE**


FEATURES

- * Low switching noise
- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge capability
- * Pb free plating 99% Sn above



MECHANICAL DATA

- * Case: ITO-220 Molded plastic
- * Epoxy: UL 94V-O rate flame retardant
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 1.8 gram

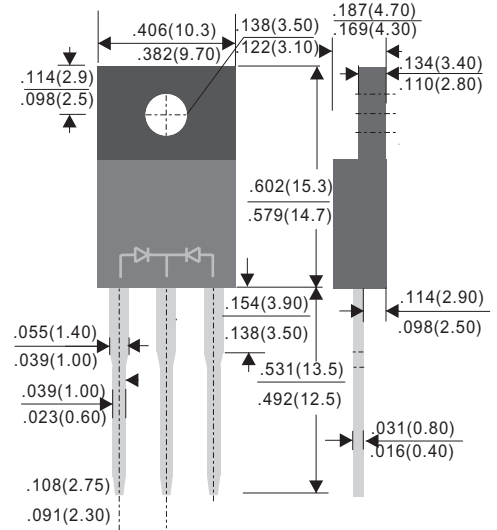

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

RATINGS	SYMBOL	SP1020C	SP1030C	SP1040C	SP1060C	SP1080C	SP10100C	SP10150C	SP10200C	UNIT	
Marking Code		SP1020C	SP1030C	SP1040C	SP1060C	SP1080C	SP10100C	SP10150C	SP10200C		
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	60	80	100	150	200	Volts	
Maximum RMS Voltage	VRMS	14	21	28	42	56	70	105	140	Volts	
Maximum DC Blocking Voltage	VDC	20	30	40	60	80	100	150	200	Volts	
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at TL = 90°C	IO	10.0								Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	150								Amps	
Typical Thermal Resistance (Note 1)	ROJA	3.0				3.5				°C/W	
Typical Junction Capacitance (Note 2)	CJ	700			500	280				PF	
Operating Temperature Range	TJ	-65 to +125								°C	
Storage Temperature Range	TSTG	-65 to +150								°C	
CHARACTERISTICS	SYMBOL	SP1020C	SP1030C	SP1040C	SP1060C	SP1080C	SP10100C	SP10150C	SP10200C	UNIT	
Maximum Forward Voltage at 5.0A DC, pre leg(Note 3)	VF	0.55			0.75	0.82	0.92				Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	IR	10				6				mAmps	
	@TA=25°C	0.5									
	@TA=100°C										

NOTES :1. Thermal Resistance (Junction to Ambient): Vertical PC Board Mounting, 0.5" (12.7mm) Lead Length.

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

3. Measured at Pulse Width 300µs, Duty Cycle 2%.

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

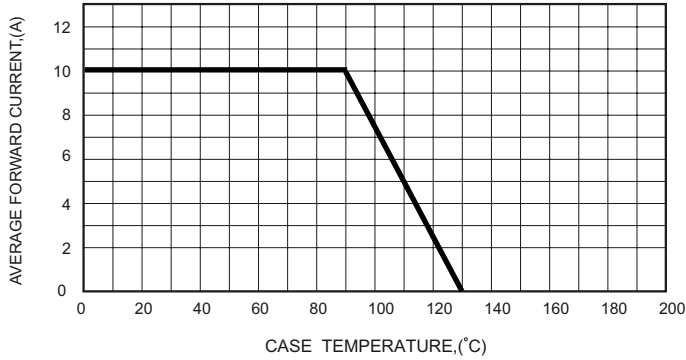


FIG.2-TYPICAL FORWARD CHARACTERISTICS

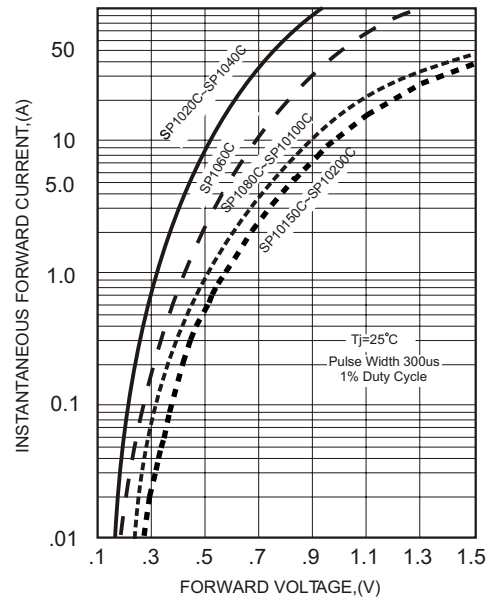


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

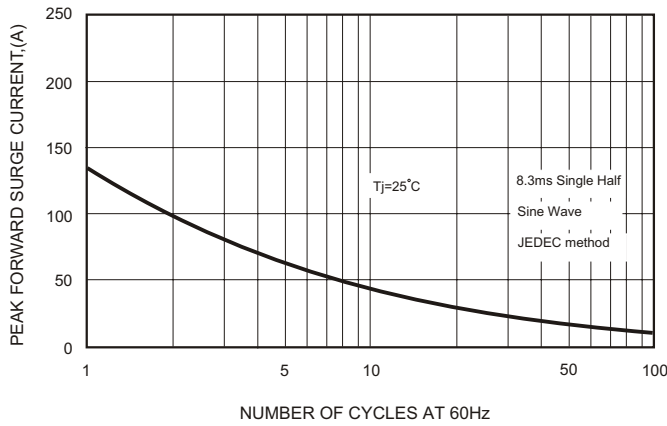


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

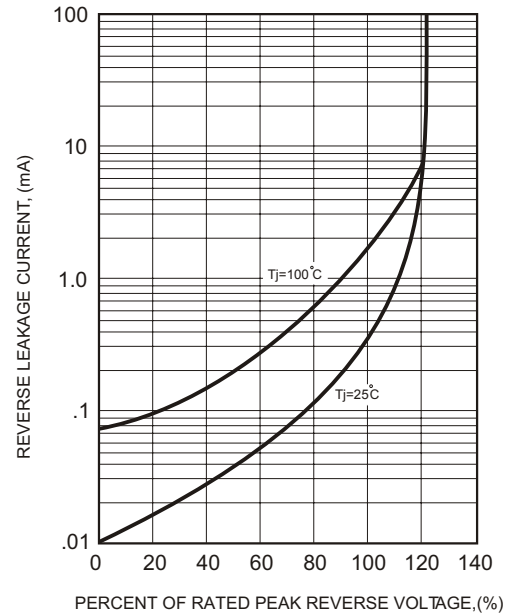


FIG.4-TYPICAL JUNCTION CAPACITANCE

