

RoHS compliant product  
A suffix of "C" specifies halogen free


## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.93 grams (Approximately)

**ITO-220**

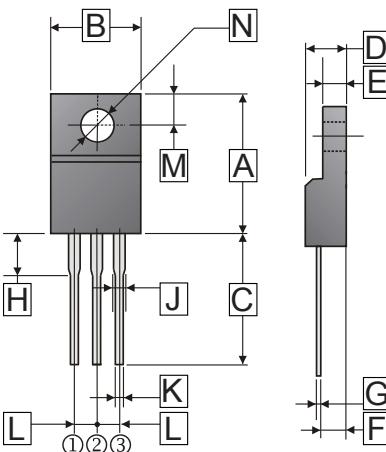

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.60	15.70	H	2.70	3.80
B	9.50	10.50	J	0.90	1.50
C	12.60	14.00	K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.30	3.2	M	2.40	3.00
F	2.30	2.80	N	Ø 3.0	Ø 3.4
G	0.30	0.70			



## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	60	V
Working Peak Reverse Voltage	$V_{RSM}$	60	V
Maximum DC Blocking Voltage	$V_{DC}$	60	V
Maximum Average Forward Rectified Current (Per Leg) (Per Device)	$I_F$	10	A
		20	
Peak Forward Surge Current, 8.3 ms single half sine-wave Superimposed on rated load (JEDEC method)	$I_{FSM}$	200	A
Maximum Instantaneous Forward Voltage $I_F=10\text{ A}, T_A=25^\circ\text{C}$ , per leg $I_F=10\text{ A}, T_A=100^\circ\text{C}$ , per leg	$V_F$	0.71	V
		0.66	
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>4</sup> $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	$I_R$	0.3	mA
		15	
Typical Junction Capacitance <sup>1</sup>	$C_J$	450	pF
Typical Thermal Resistance $R_{\theta JC}$ <sup>2</sup>	$R_{\theta JC}$	4	°C / W
Voltage Rate of Change (Rated $V_R$ )	$dv/dt$	10000	V / μs
Operating Temperature Range $T_J$	$T_J$	-50~150	°C
Storage Temperature Range $T_{STG}$	$T_{STG}$	-65~175	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse Test: Pulse Width =300μs, Duty Cycle<=2%.

## RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

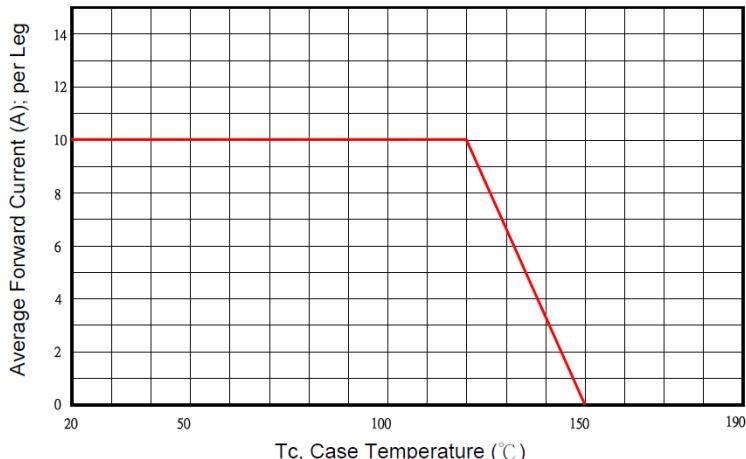


Typical Forward Characteristic

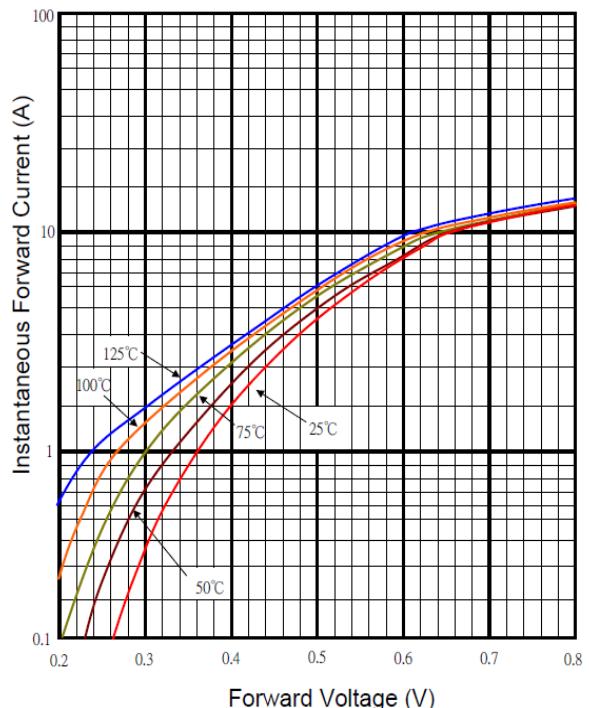

Typical Junction Capacitance

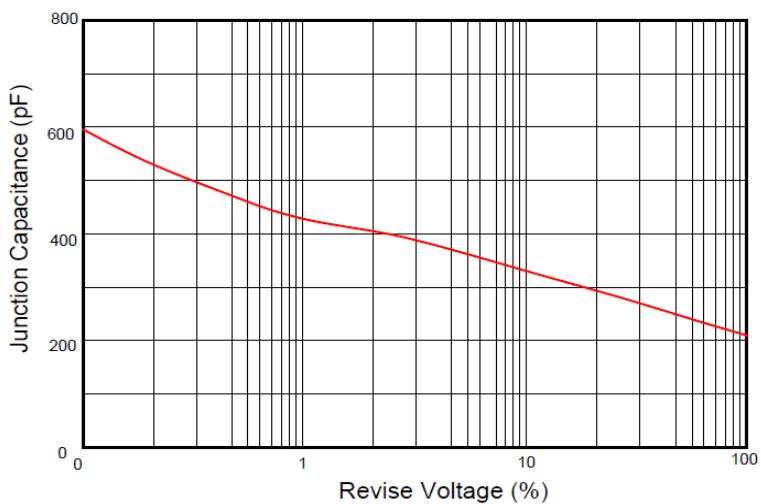

Typical Reverse Characteristic

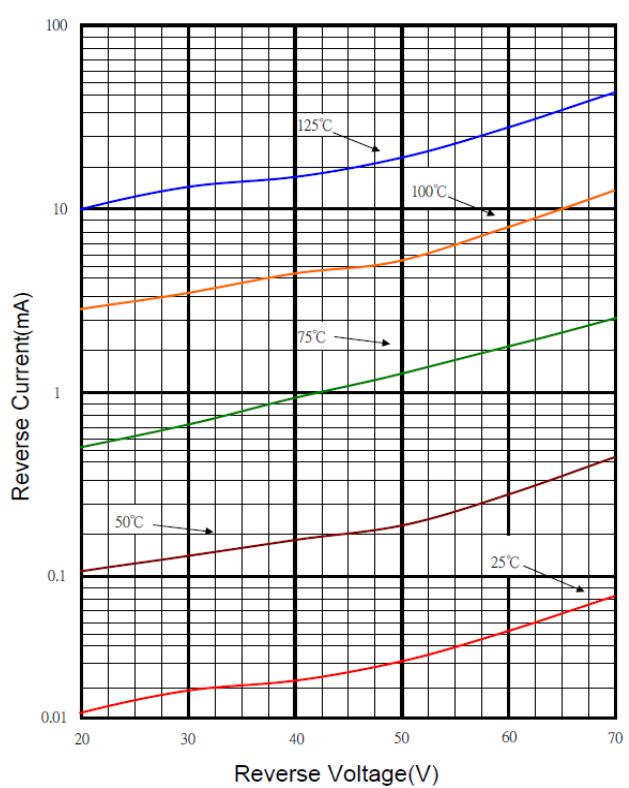

Maximum Non- Repetitive Forward Surge Current

