

Preliminary Data

SIPMOS® Power Transistor



SPD 10N10

Features

- N channel
- Enhancement mode
- Avalanche rated
- dv/dt rated

Product Summary

Drain source voltage	V_{DS}	100	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.2	Ω
Continuous drain current	I_D	10	A



Type	Package	Ordering Code	Packaging	Pin 1	Pin 2	Pin 3
SPD10N10	P-TO252	Q67040-S4119-A2	Tape and Reel	G	D	S
SPU10N10	P-TO251	Q67040-S4111-A2	Tube			

Maximum Ratings, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C = 25\text{ }^\circ\text{C}$ $T_C = 100\text{ }^\circ\text{C}$	I_D	10 6.3	A
Pulsed drain current $T_C = 25\text{ }^\circ\text{C}$	I_{Dpulse}	40	
Avalanche energy, single pulse $I_D = 10\text{ A}$, $V_{DD} = 25\text{ V}$, $R_{GS} = 25\text{ }\Omega$	E_{AS}	59	mJ
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	4	
Reverse diode dv/dt $I_S = 10\text{ A}$, $V_{DS} = 0\text{ V}$, $di/dt = 200\text{ A}/\mu\text{s}$	dv/dt	6	kV/ μs
Gate source voltage	V_{GS}	± 20	V
Power dissipation $T_C = 25\text{ }^\circ\text{C}$	P_{tot}	40	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	$^\circ\text{C}$
IEC climatic category; DIN IEC 68-1		55/150/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-		3.1	K/W
Thermal resistance, junction - ambient, leded	R_{thJA}	-	-	100	
SMD version, device on PCB: @ min. footprint @ 6 cm ² cooling area ¹⁾	R_{thJA}	-	-	75 50	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage $V_{GS} = 0\text{ V}$, $I_D = 0.25\text{ mA}$	$V_{(BR)DSS}$	100	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 1\text{ mA}$	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current $V_{DS} = 100\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ $V_{DS} = 100\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$	I_{DSS}	-	0.1	1 100	μA
Gate-source leakage current $V_{GS} = 20\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	-	10	100	
Drain-Source on-state resistance $V_{GS} = 10\text{ V}$, $I_D = 6\text{ A}$	$R_{DS(on)}$	-	0.15	0.2	Ω

¹ Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 6\text{ A}$	g_{fs}	3	4.3	-	S
Input capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{iss}	-	400	530	pF
Output capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{oss}	-	125	180	
Reverse transfer capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{rss}	-	70	105	
Turn-on delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$, $R_G = 50\text{ }\Omega$	$t_{d(on)}$	-	10	15	ns
Rise time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$, $R_G = 50\text{ }\Omega$	t_r	-	45	70	
Turn-off delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$, $R_G = 50\text{ }\Omega$	$t_{d(off)}$	-	55	75	
Fall time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$, $R_G = 50\text{ }\Omega$	t_f	-	40	55	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge $V_{DD} = 80\text{ V}, I_D = 10\text{ A}$	Q_{gs}	-	4.5	7	nC
Gate to drain charge $V_{DD} = 80\text{ V}, I_D = 10\text{ A}$	Q_{gd}	-	29.6	45	
Gate charge total $V_{DD} = 80\text{ V}, I_D = 10\text{ A}, V_{GS} = 0\text{ to }10\text{ V}$	Q_g	-	46	69	
Gate plateau voltage $V_{DD} = 80\text{ V}, I_D = 10\text{ A}$	$V_{(\text{plateau})}$	-	6.8	-	V

Reverse Diode

Inverse diode continuous forward current $T_C = 25\text{ }^\circ\text{C}$	I_S	-	-	10	A
Inverse diode direct current,pulsed $T_C = 25\text{ }^\circ\text{C}$	I_{SM}	-	-	40	
Inverse diode forward voltage $V_{GS} = 0\text{ V}, I_F = 20\text{ A}$	V_{SD}	-	1.4	1.6	V
Reverse recovery time $V_R = 30\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$	t_{rr}	-	170	255	ns
Reverse recovery charge $V_R = 30\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$	Q_{rr}	-	0.3	0.45	μC

Power Dissipation


$P_{tot} = f(T_C)$

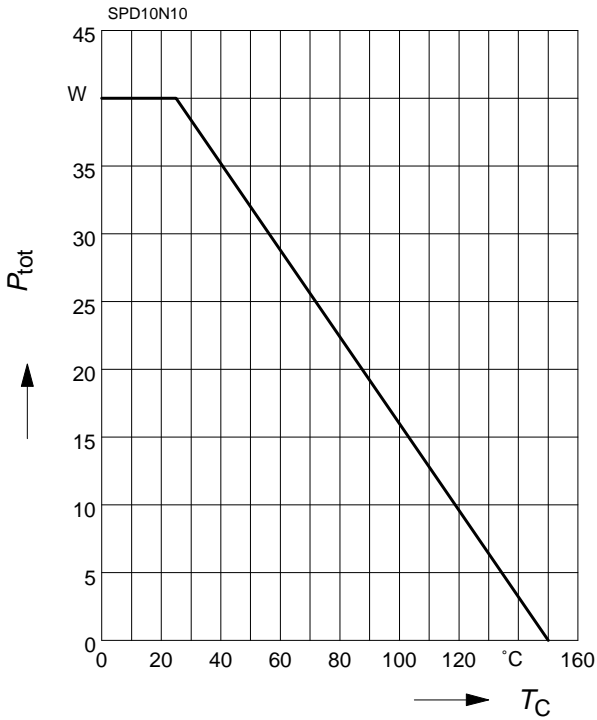

Drain current

$I_D = f(T_C)$


parameter: $V_{GS} \geq 10\text{ V}$

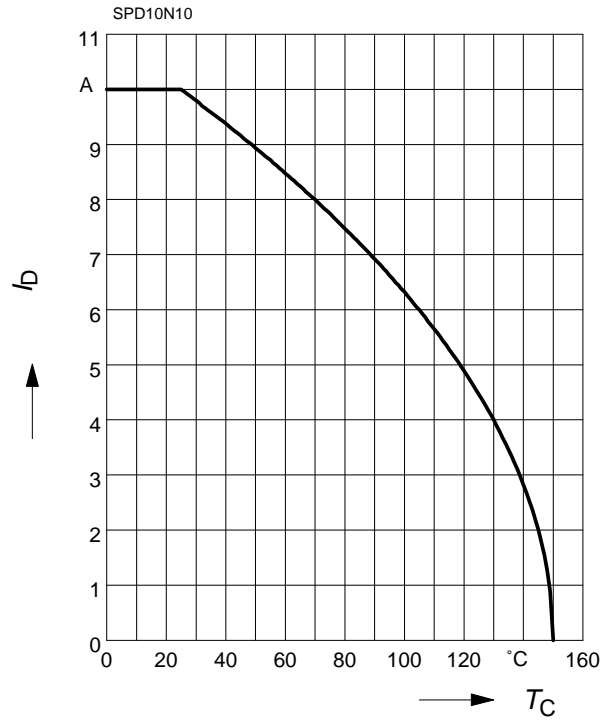

Safe operating area

$I_D = f(V_{DS})$


parameter: $D = 0, T_C = 25\text{ °C}$

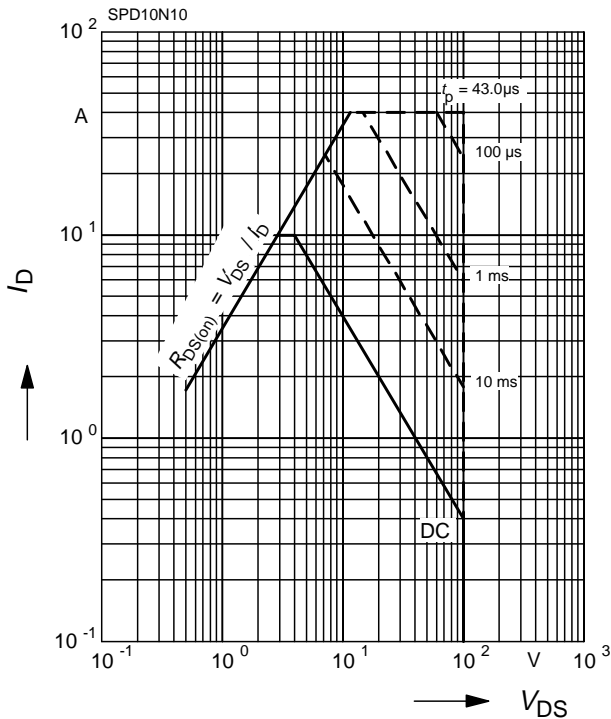

Transient thermal impedance


$Z_{thJC} = f(t_p)$

parameter: $D = t_p/T$

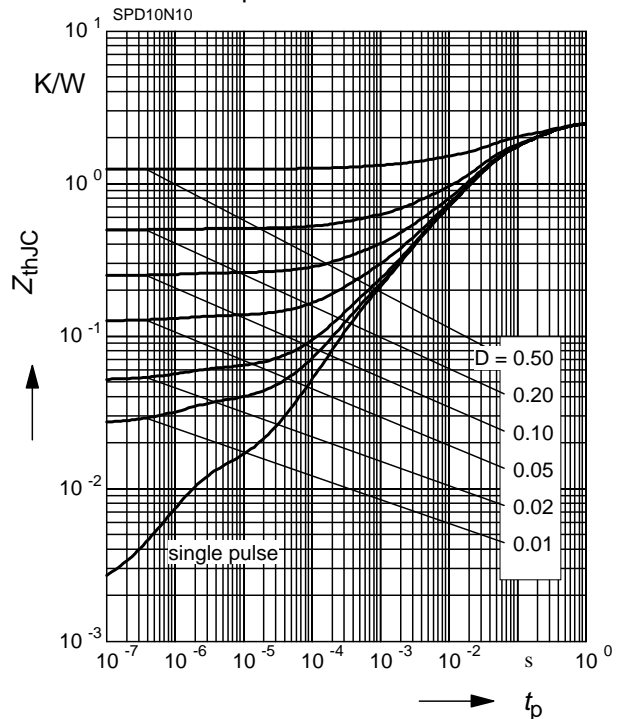


Typ. output characteristics

$I_D = f(V_{DS})$
parameter: $t_p = 80 \mu s$

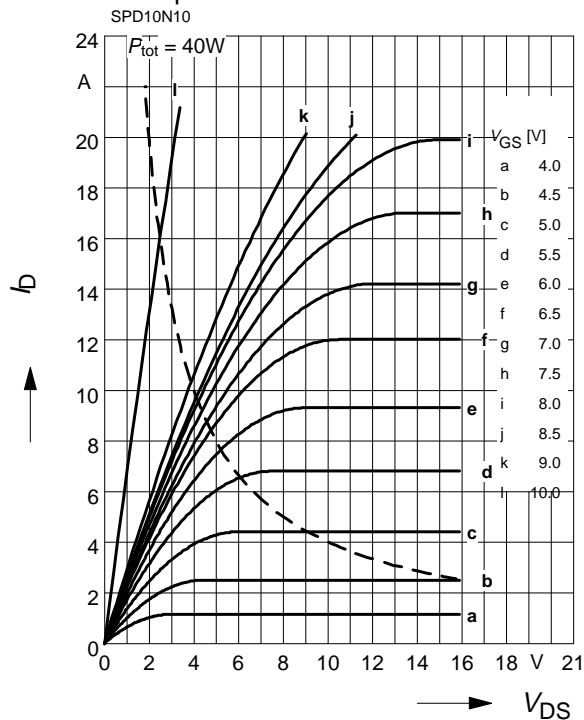


Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$
parameter: V_{GS}

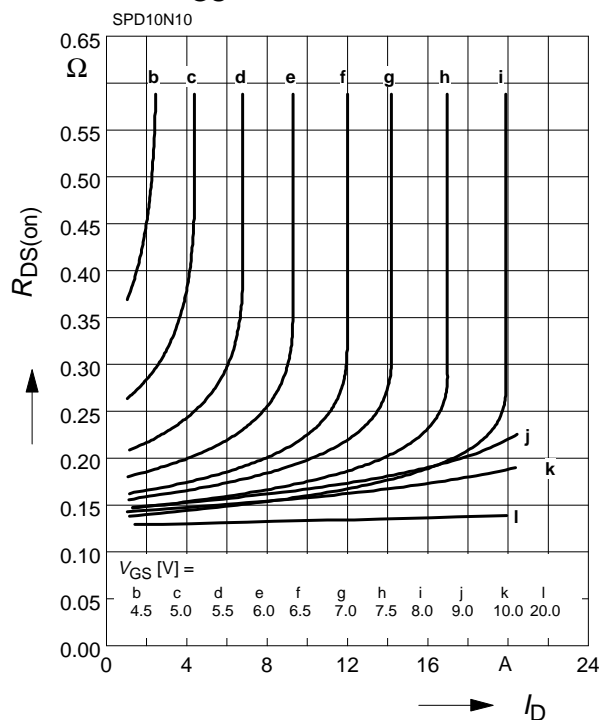


Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: $t_p = 80 \mu s$
 $V_{DS} \geq 2 \times I_D \times R_{DS(on)} \max$

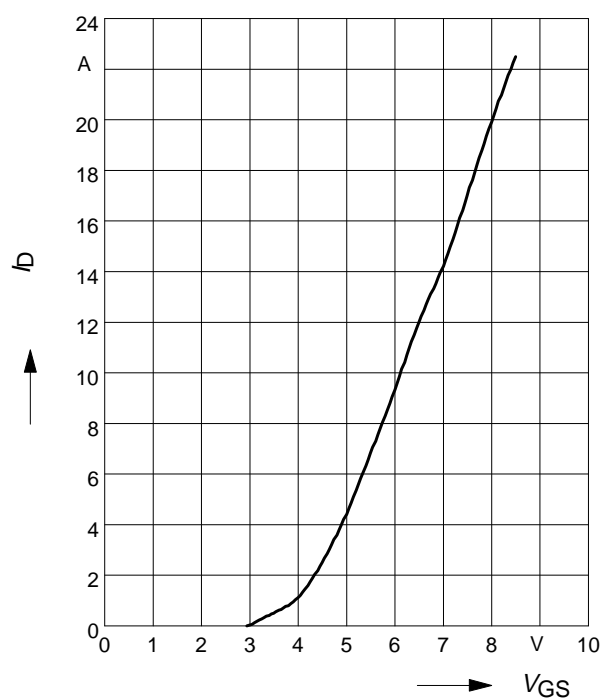

Typ. forward transconductance


$g_{fs} = f(I_D); T_j = 25^\circ C$
parameter: g_{fs}

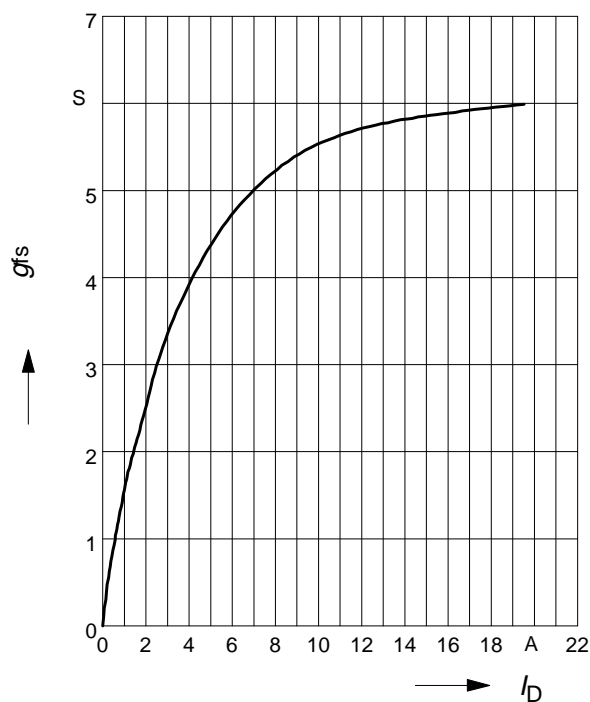

Drain-source on-resistance

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = 6 \text{ A}$, $V_{GS} = 10 \text{ V}$

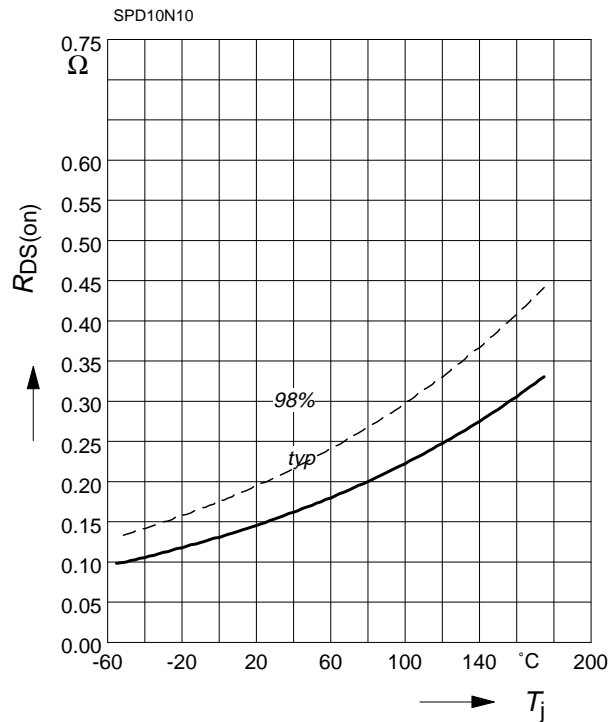

Gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter : $V_{GS} = V_{DS}$, $I_D = 1 \text{ mA}$

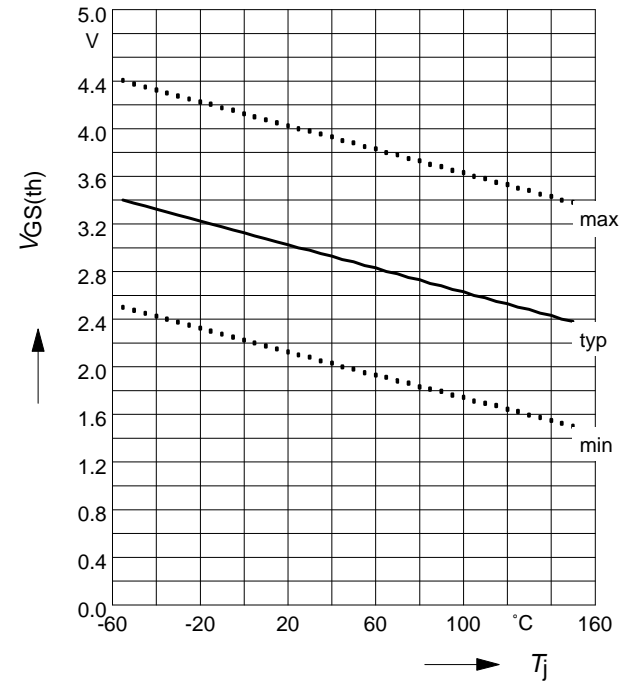

Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$

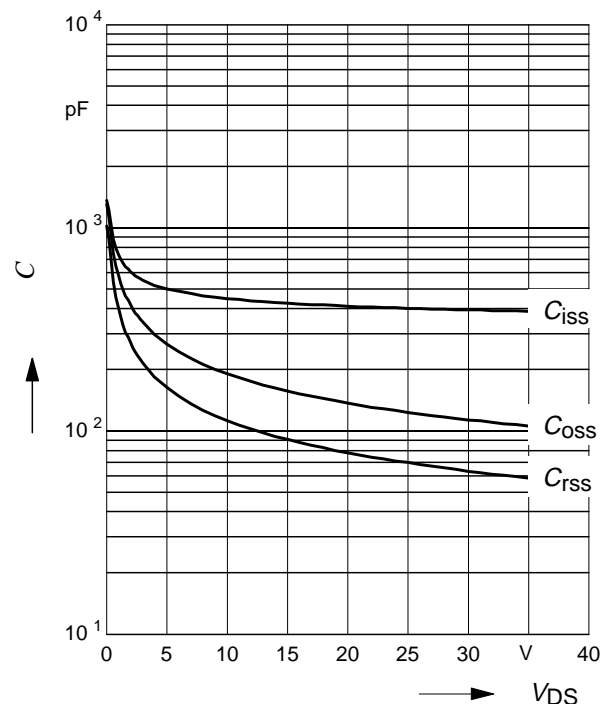

Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j , $t_p = 80 \mu\text{s}$

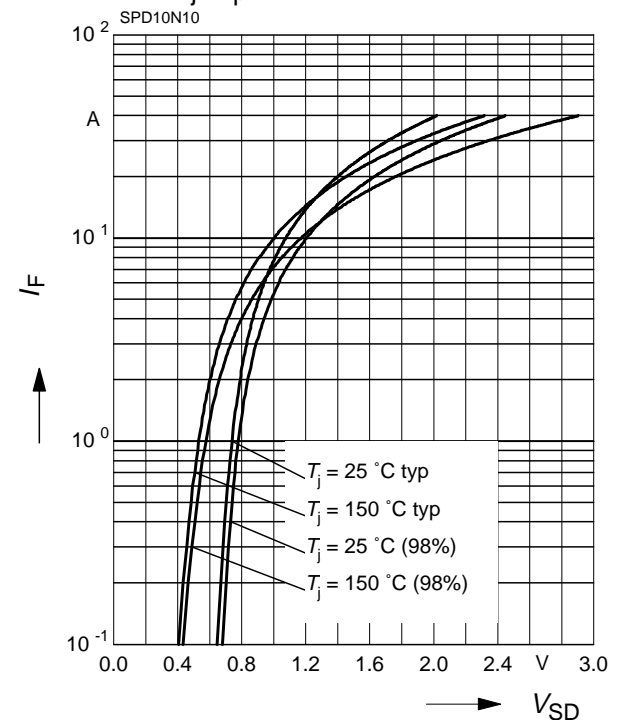

Avalanche Energy $E_{AS} = f(T_j)$

parameter: $I_D = 10\text{ A}$, $V_{DD} = 25\text{ V}$


$R_{GS} = 25\ \Omega$

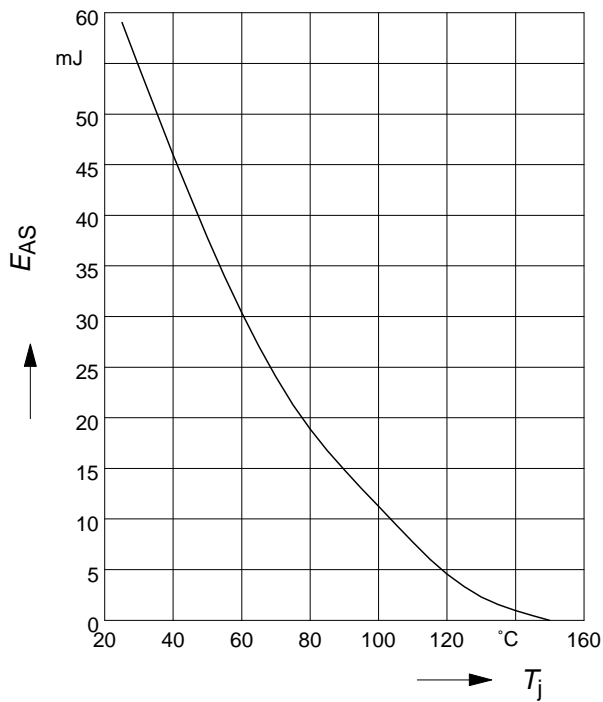

Typ. gate charge $V_{GS} = f(Q_{Gate})$

parameter: $I_{D\text{ puls}} = 10\text{ A}$

parameter: $I_{D\text{ puls}} = 10\text{ A}$

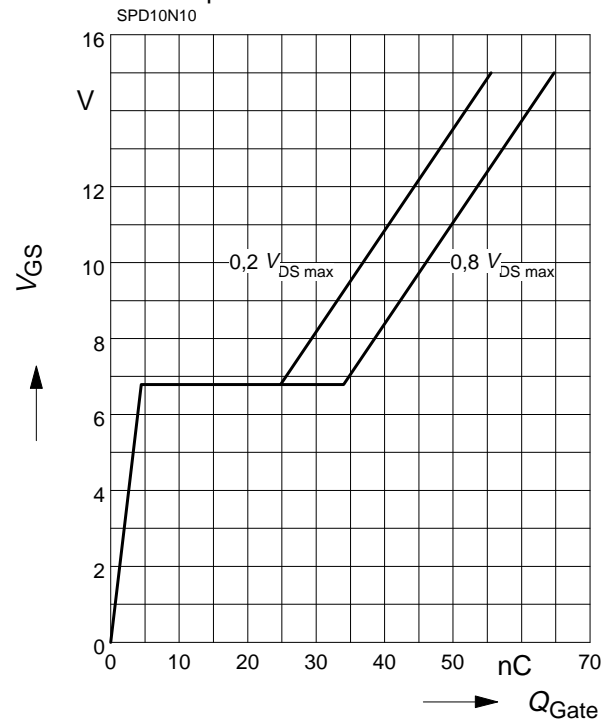

Drain-source breakdown voltage $V_{(BR)DSS} = f(T_j)$

$V_{(BR)DSS} = f(T_j)$

