

SPI5342-H

Photo Diode

unit : mm


Features

- Peak sensitivity wavelength matching with infrared LED(λ_P =940nm)
- 4.8mm ×5.6mm side view package
- Colorless transparency lens type

Application

• Various kinds of remote control systems

Outline Dimensions

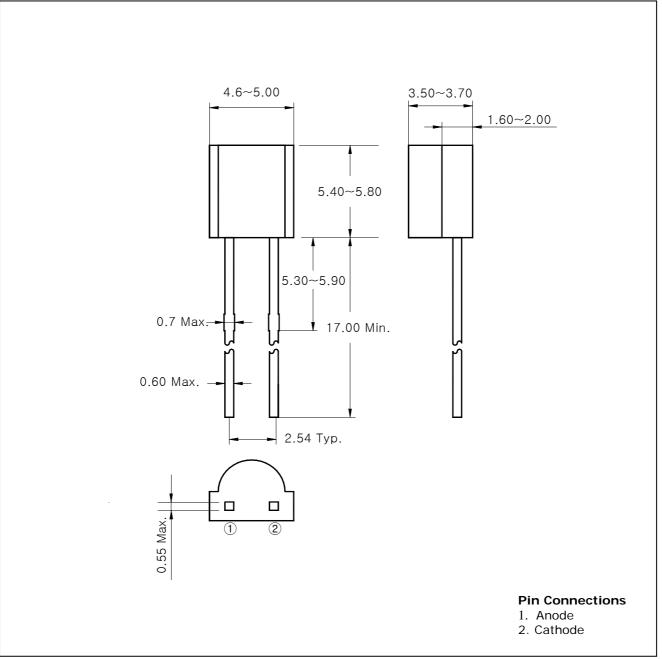

SPI5342-H

(Ta=25℃)

Absolute Maximum Ratings

Absolute Maximum Ratings	5		(Ta=25℃)
Characteristic	Symbol	Rating	Unit
Reverse voltage	V _R	70	V
Power dissipation	P _D	170	mW
Operating temperature range	T _{opr}	-20~70	C
Storage temperature range	T _{stg}	-25~85	C
*1Soldering temperature	T _{sol}	260°C for 10 seconds	

*1. Keep the distance more than 2.0mm from PCB to the bottom of LED package


Electrical / Optical Characteristics

Lieuriur, optical characteristics			(10-25 0)			
Characteristic	Symbol	Test Condition	Min	Тур	Max	Unit
Short circuit current	I _{SC}	V_{R} =5V, * $^{2}E_{e}$ =6mW/cm ²	-	50	-	uA
Dark current	Ι _D	V_R =10V, E_e =0	-	-	50	nA
Capacitance	CT	$V_R = 10V$, f=1MHz	-	10	-	pF
Photosensitivity spectral range	λ	-	430 ~ 1,050			nm
Peak sensitivity wavelength	λ_{P}	-	-	940	-	nm
Half angle	$\theta^1/_2$	-	-	±55	-	deg

*2. $E_{\rm e}$: Irradiance by infrared LED light source ($\lambda_P{=}950nm)$

SPI5342-H

Characteristic Diagrams

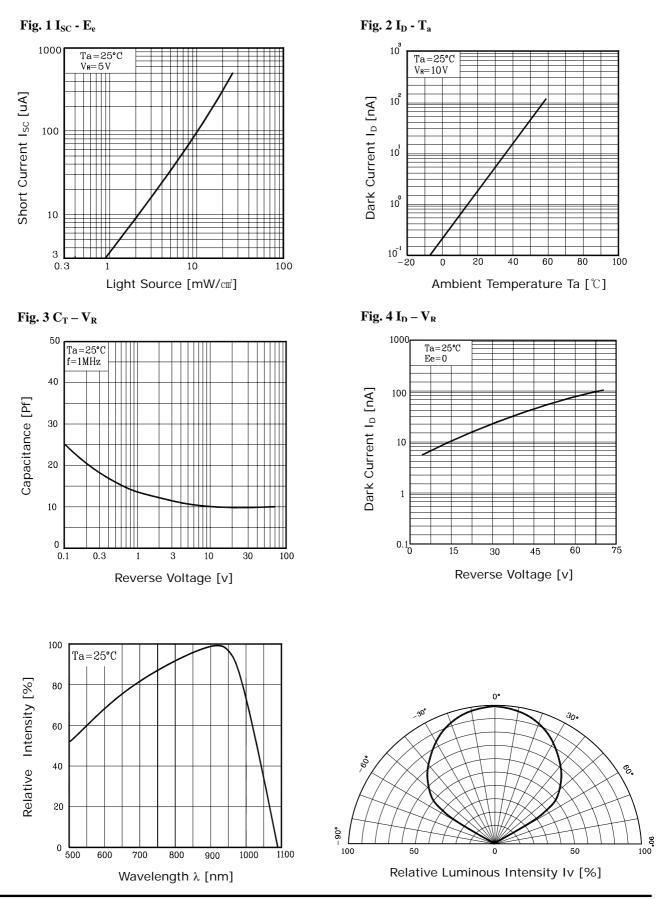

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.