


### FEATURES

- Power pack
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High forward surge capability
- High frequency operation
- Meets MSL Level 1, per J-STD-020, LF MAX peak of 245°C (for TO-263 package)
- Solder bath temperature 275°C maximum, 10s, per JESD22-B106 (for TO-220AB and ITO-220AB package)
- Component in accordance to RoHS 2011/65/EU




TO-220AB

SR1645LCT




ITO-220AB

SRF1645LCT



TO-263

SR1645LD1



### MECHANICAL DATA

- Case: JEDEC TO-220AB、ITO-220AB、TO-263
- Molding compound meets UL94V-0 flammability rating
- Terminals: Lead solderable per J-STD-002 and JESD22-B102
- Polarity: As marked
- Mounting Torque: 10 in-lbs maximum

### TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

### MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified )

Parameter	Symbol	SR1645LCT, SRF1645LCT,SR1645LD1	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	45	V
Maximum average forward rectified current (see fig.1)	Per leg	8.0	A
	Total device	16.0	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I <sub>FSM</sub>	200	A
Peak repetitive reverse current per diode at t <sub>p</sub> =2 μs 1KHz	I <sub>RRM</sub>	0.5	A
Operating junction and Storage temperature range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
Isolation voltage (ITO-220AB only) from terminals to heatsink t=1 min	V <sub>AC</sub>	1500	V

PRIMARY CHARACTERISTICS	
IF(AV)	2×8A
VRRM	45V
IFSM	200A
VF at IF=8.0A,Per leg	0.35V
IR	80 μ A
TJ(MAX)	150°C
Package	TO-220AB, ITO-220AB, TO-263
Diode variations	Common cathode

# RATINGS AND CHARACTERISTIC OF SR1645LCT,SRF1645LCT,SR1645LD1

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instantaneous forward voltage	Per leg IF=8.0A	T <sub>A</sub> =25°C	V <sub>F</sub> <sup>1)</sup>	0.45	0.48	V
		T <sub>A</sub> =100°C		0.37	-	
		T <sub>A</sub> =125°C		0.35	-	
	Per leg IF=5.0A	T <sub>A</sub> =25°C		0.41	0.43	
		T <sub>A</sub> =100°C		0.33	-	
		T <sub>A</sub> =125°C		0.31	-	
Reverse current	VR=45V	T <sub>A</sub> =25°C	I <sub>R</sub> <sup>2)</sup>	80	200	μA
		T <sub>A</sub> =100°C		8	15	mA
		T <sub>A</sub> =125°C		20	50	
Typical junction capacitance	4V, 1MHz		C <sub>J</sub>	570		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width≤40ms

## THERMAL CHARACTERISTICS (T<sub>A</sub>=25°C Unless otherwise noted)

Parameter	Symbol	SR1645LCT	SRF1645LCT	SR1645LD1	Unit
Typical thermal resistance <sup>3)</sup>	R <sub>θJC</sub>	2.5	4.5	2.5	°C/W

3.Thermal resistance from junction to case

## AVAILABLE PACK INFORMATION

Product code	Pack	Box Size L×W×H(mm)	Quantity (pcs/box)	Carton SizeL×W×H(mm)	Quantity (box/carton)
SR1645LCT-TO-220AB	P/T	558×148×38	1000	565×225×170	5
SRF1645LCT-ITO-220AB	P/T	558×148×38	1000	565×225×170	5
SR1645LD1-TO-263	P/T	558×148×38	1000	565×225×170	5

# RATINGS AND CHARACTERISTIC OF SR1645LCT,SRF1645LCT,SR1645LD1

FIG.1-FORWARD CURRENT DERATING CURVE

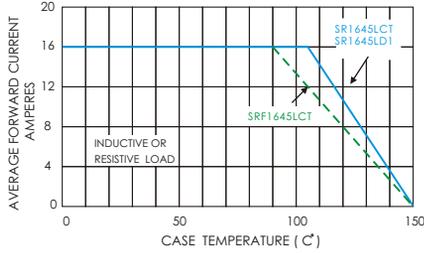


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

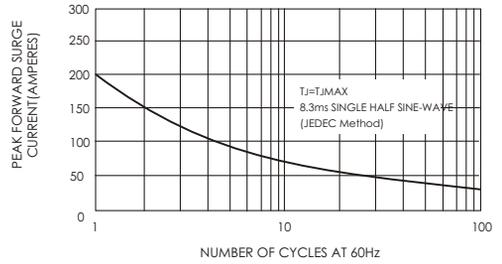


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

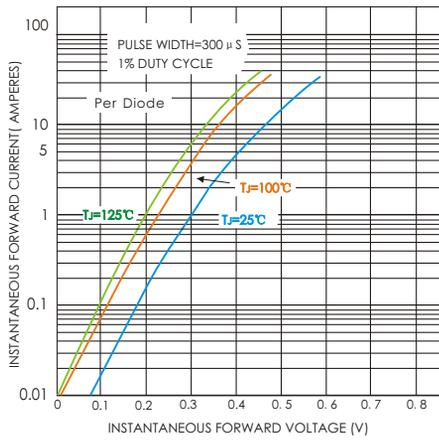


FIG.4-TYPICAL REVERSE CHARACTERISTICS



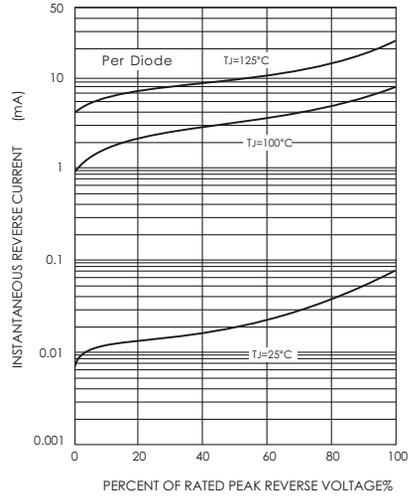


FIG.5-TYPICAL JUNCTION CAPACITANCE

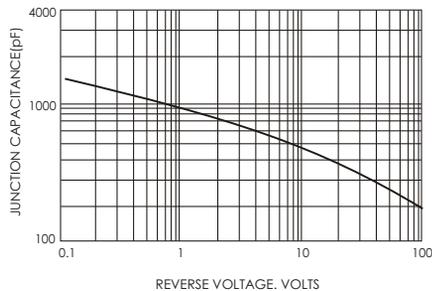


# PACKAGE OUTLINE DIMENSIONS


## TO-220AB

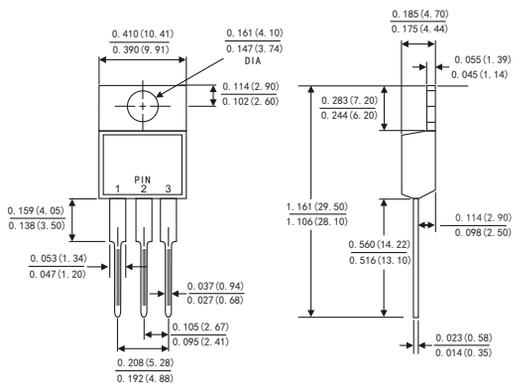


## ITO-220AB

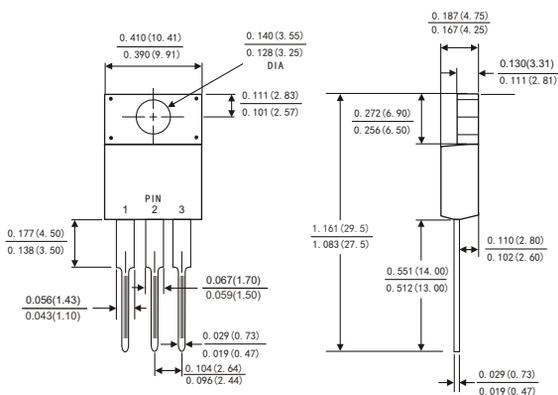

## TO-263

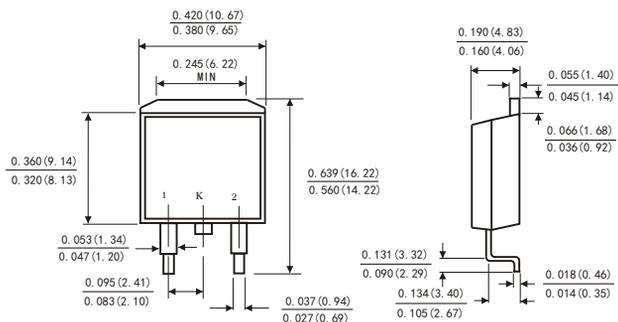

## Suggested Pad Layout

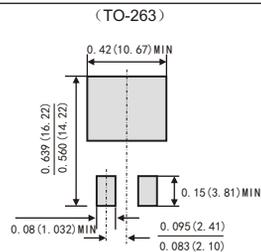

Dimensions in inches and (millimeters)