

***SR16X0PT SERIES***

***SCHOTTKY BARRIER RECTIFIER***

产

品

规

格

确

认

书

# SR1620PT THRU SR16200PT

## SCHOTTKY BARRIER RECTIFIER



**REVERSE VOLTAGE:** 20 to 200 VOLTS  
**FORWARD CURRENT:** 16.0 AMPERE


### FEATURES

- Plastic package has UL flammability classification 94V-0
- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- High capability
- Low power loss, high efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications

### MECHANICAL DATA

Case: Molded plastic, TO-3P/TO-247AD  
 Epoxy: UL 94V-O rate flame retardant  
 Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed  
 Polarity: As marked  
 Mounting position: Any  
 Weight: 0.2ounce, 5.6gram

### TO-3P/TO-247AD

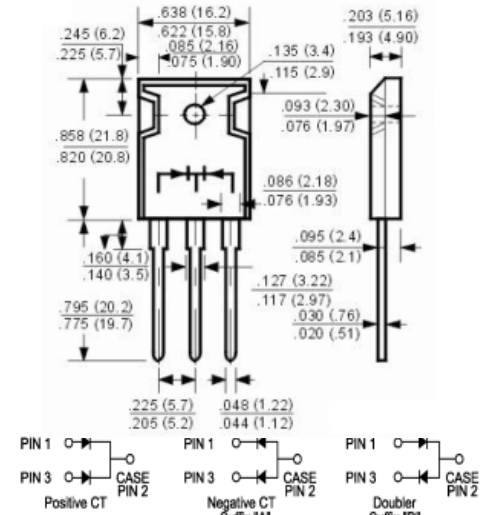

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

	Symbols	SR1620PT	SR1630PT	SR1640PT	SR1650PT	SR1660PT	SR1680PT	SR16100PT	SR16150PT	SR16200PT	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	16.0									Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	200									Amp
Maximum Forward Voltage at 8.0A DC and 25°C (Note 3)	$V_F$	0.55			0.70		0.85		0.95		Volts
Maximum Reverse Current at Rated DC Blocking Voltage	$I_R$	0.5							0.2		mAmp
Typical Junction Capacitance (Note 1)	$C_J$	700			400						pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	2.5									°C/W
Operating Temperature Range	$T_J$	-55 to +125			-55 to +150						°C
Storage Temperature Range	$T_{stg}$	-55 to +150									°C

### NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance from Junction to Case Per Leg
- 3- 300 us Pulse Width, 2% Duty Cycle

# SR1620PT THRU SR16200PT SCHOTTKY BARRIER RECTIFIER

## RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

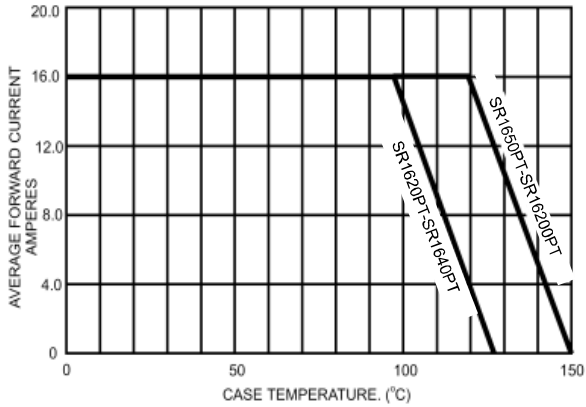


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

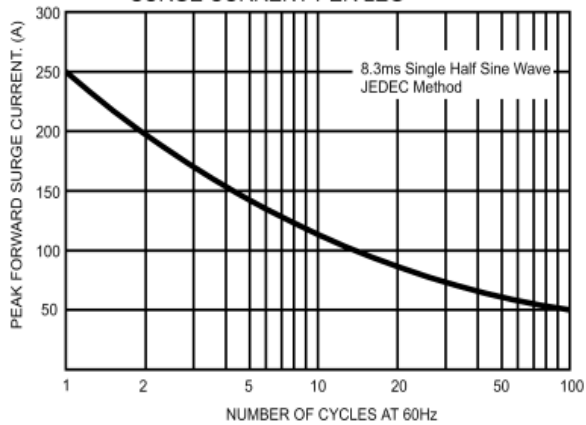


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

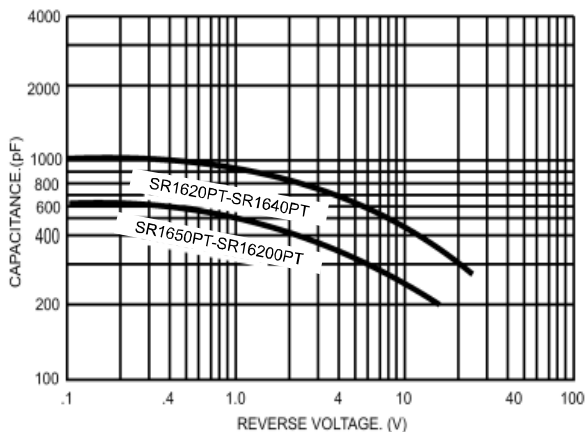


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER LEG

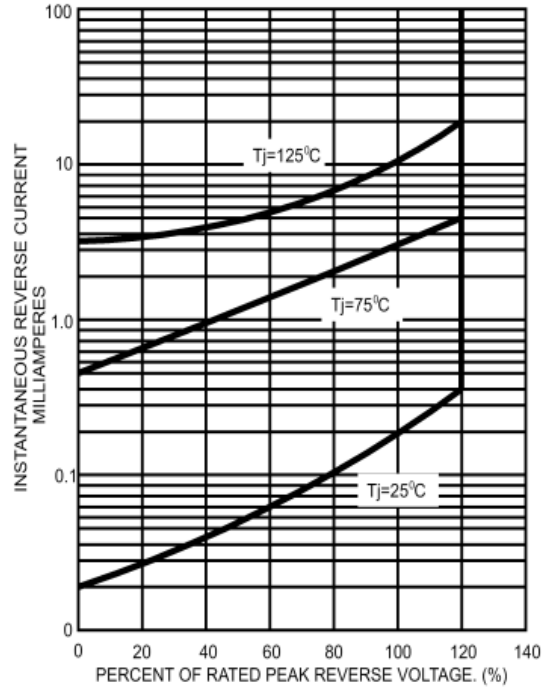


FIG.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

