


Features

- Colorless transparency lens type
- $\phi 3\text{mm}$ (T-1) all plastic mold type
- Wide half angle of intensity($\theta_{\frac{1}{2}} = \pm 40^\circ$)
- Super brightness

Outline Dimensions

unit : mm

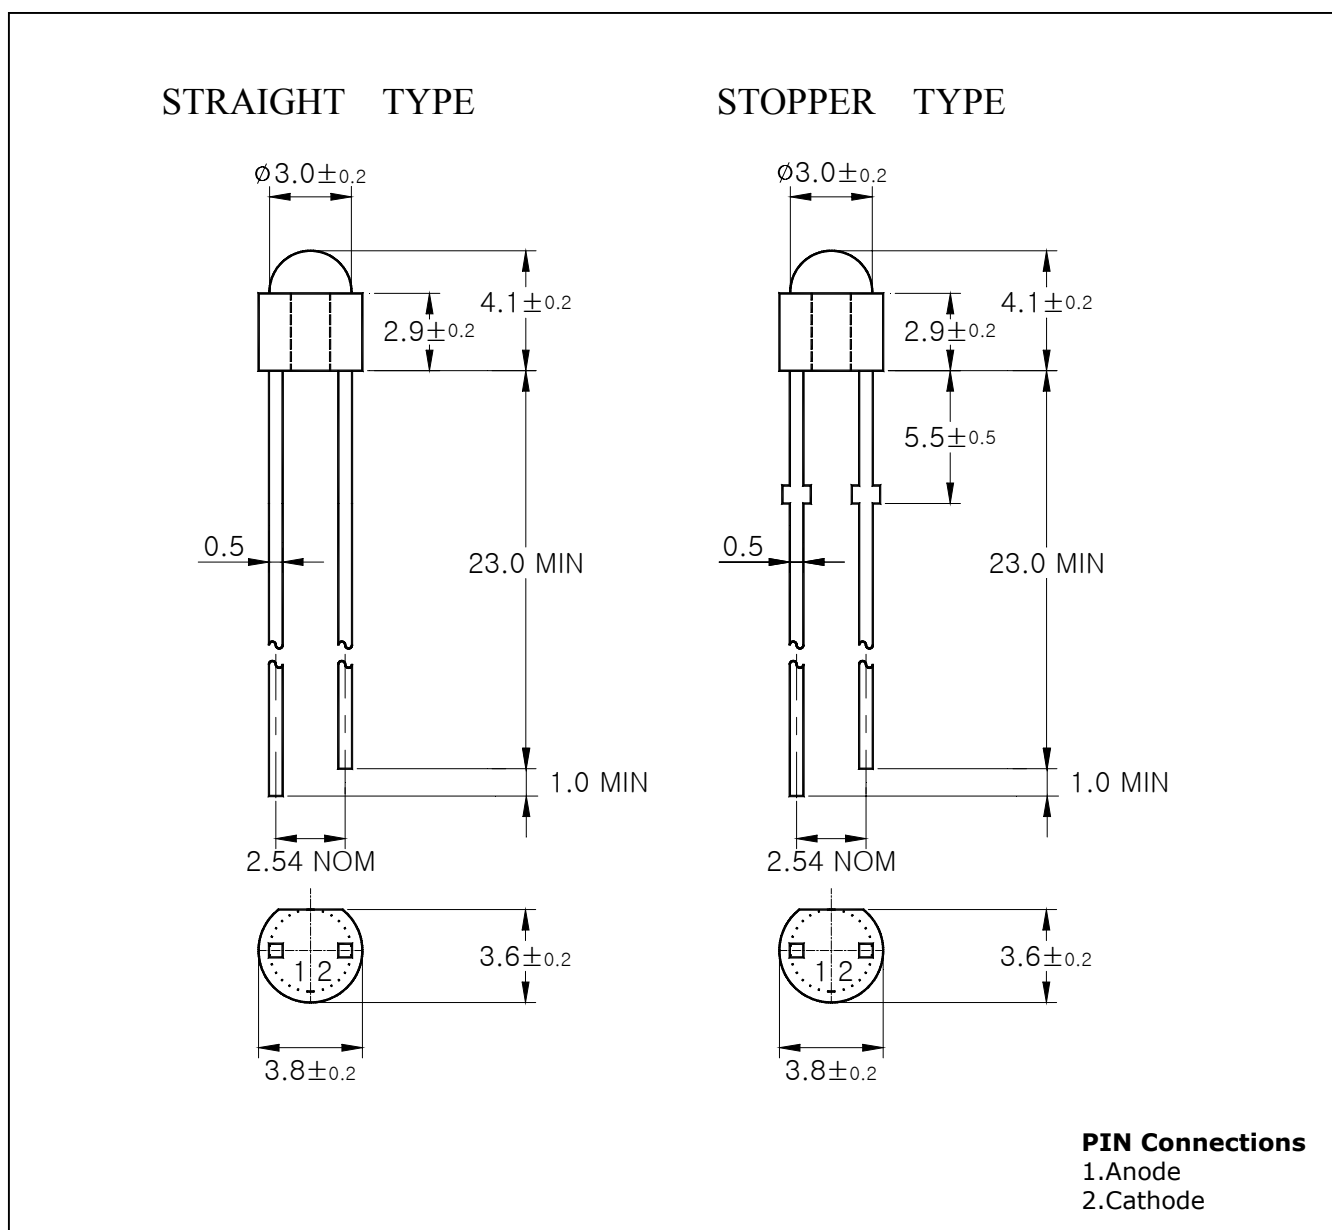

Absolute maximum ratings

| Characteristic | Symbol | Ratings | Unit |
|-------------------------|-----------|---------------------|------|
| Power Dissipation | P_D | 70 | mW |
| Forward Current | I_F | 30 | mA |
| *1Peak Forward Current | I_{FP} | 50 | mA |
| Reverse Voltage | V_R | 4 | V |
| Operating Temperature | T_{opr} | -25 ~ 85 | °C |
| Storage Temperature | T_{stg} | -30 ~ 100 | °C |
| *2Soldering Temperature | T_{sol} | 260°C for 5 seconds | |

*1.Duty ratio = 1/16, Pulse width = 0.1ms

*2.Keep the distance more than 2.0mm from PCB to the bottom of LED package

Electrical Characteristics

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|--------------------|------------------|----------------|------|------|------|------|
| Forward Voltage | V_F | $I_F= 20mA$ | - | 1.8 | 2.5 | V |
| Luminous Intensity | I_V | $I_F= 20mA$ | 25 | 50 | - | mcd |
| Peak Wavelength | λ_P | $I_F= 20mA$ | - | 660 | - | nm |
| Spectrum Bandwidth | $\Delta \lambda$ | $I_F= 20mA$ | - | 20 | - | nm |
| Reverse Current | I_R | $V_R=4V$ | - | - | 10 | uA |
| *3Half Angle | $\theta_{1/2}$ | $I_F= 20mA$ | - | ±40 | - | deg |

*3. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the peak intensity

Characteristic Diagrams

Fig. 1 $I_F - V_F$

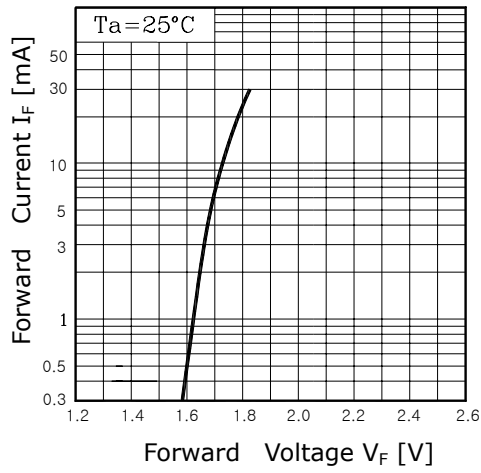


Fig. 2 $I_V - I_F$

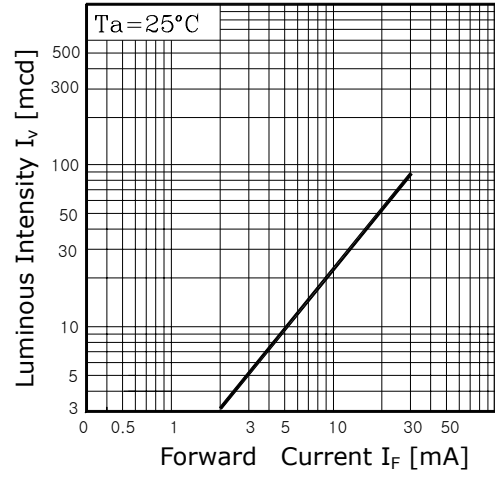


Fig. 3 $I_F - T_a$

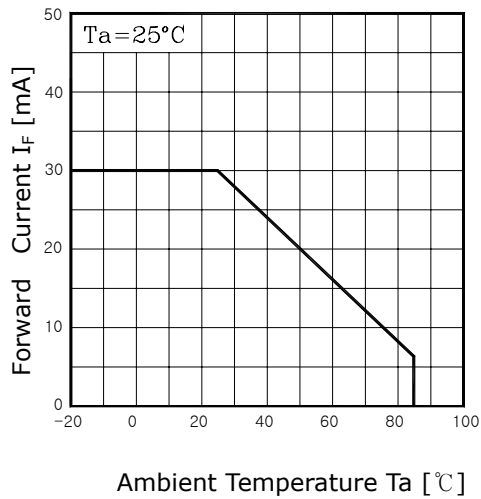


Fig. 4 Spectrum Distribution

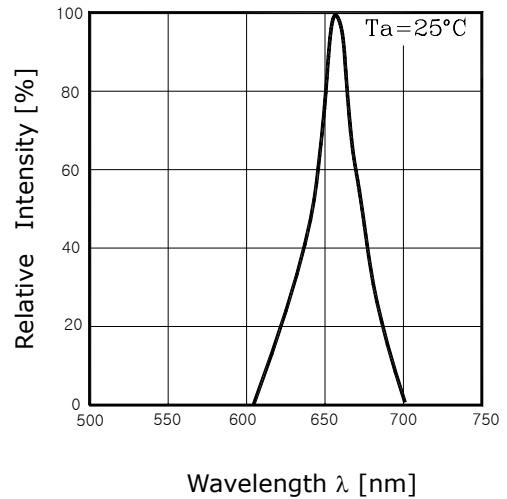


Fig. 5 Radiation Diagram

