



S E M I C O N D U C T O R

# SRF1020 THRU SRF10200

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts


Forward Current - 10.0 Amperes

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- Component in accordance to RoHS 2011/65/EU



## ITO-220AC

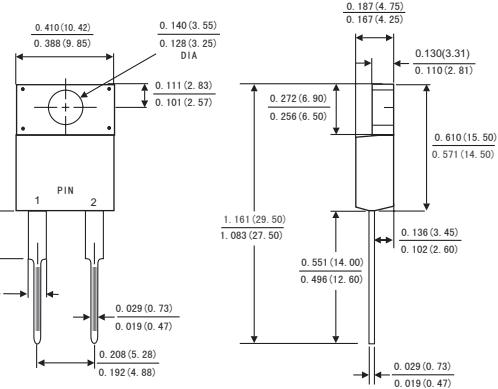

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC ITO-220AC molded plastic body
- Terminals: Lead solderable per MIL-STD-750, method 2026
- Polarity: As marked
- Mounting Position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	SRF 1020	SRF 1030	SRF 1040	SRF 1060	SRF 10100	SRF 10150	SRF 10200	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	60	100	150	200	Volts
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	42	70	105	140	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current (see Fig.1)	I <sub>(AV)</sub>					10.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>					150.0			Amps
Maximum instantaneous forward voltage at 10.0 A (Note 1)	V <sub>F</sub>		0.60		0.75	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	T <sub>A</sub> =25°C	I <sub>R</sub>		200		50			µA
	T <sub>A</sub> =100°C			5		—			
	T <sub>A</sub> =125°C			—		5			mA
Typical thermal resistance (Note 2)	R <sub>θJC</sub>			2.5					°C/W
Operating junction temperature range	T <sub>J</sub>			-55 to +150					°C
Storage temperature range	T <sub>STG</sub>			-55 to +150					°C

**Notes:** 1. Pulse test: 300 µs pulse width, 1% duty cycle

2. Thermal resistance from junction to case

## RATINGS AND CHARACTERISTIC CURVES SRF1020 THRU SRF10200

FIG.1-FORWARD CURRENT DERATING CURVE

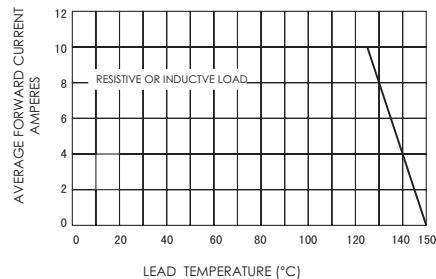


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

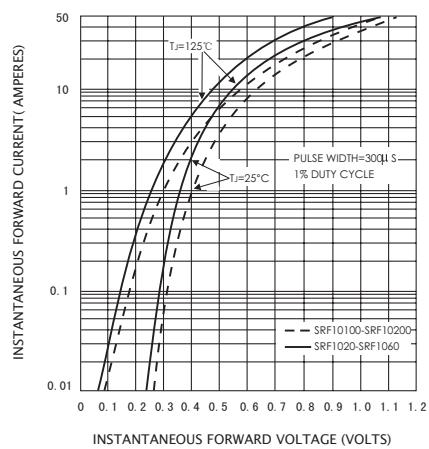


FIG.5-TYPICAL JUNCTION CAPACITANCE

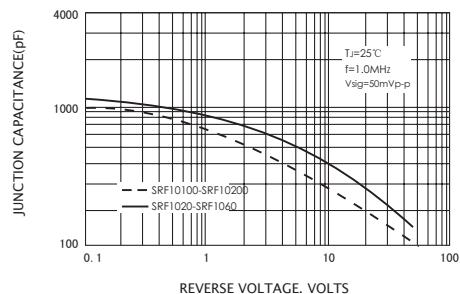


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

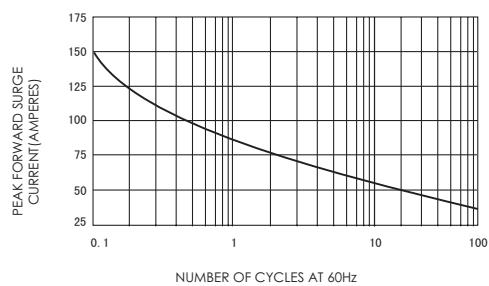


FIG.4-TYPICAL REVERSE CHARACTERISTICS

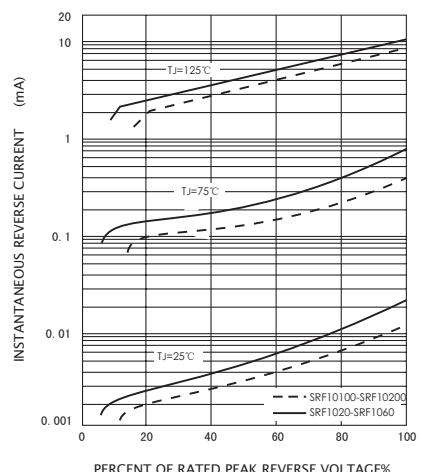


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

