

# SS12 - SS110

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS


**PRV : 20 - 100 Volts**  
**I<sub>o</sub> : 1.0 Ampere**

### FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* High efficiency
- \* Low power loss
- \* Low forward voltage drop
- \* Low cost
- \* Pb / RoHS Free

### MECHANICAL DATA :

- \* Case : SMA Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.060 gram (Approximately)

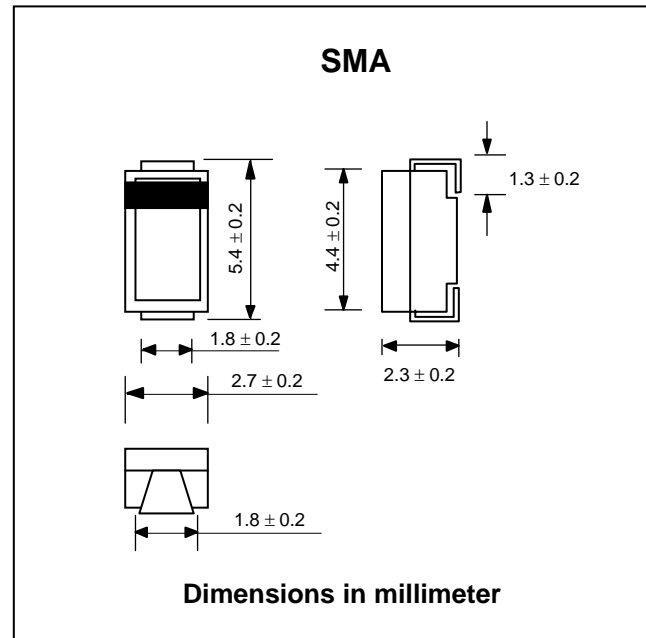

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


RATING	SYMBOL	SS12	SS13	SS14	SS15	SS16	SS18	SS19	SS110	UNIT	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	90	100	V	
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	63	70	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	90	100	V	
Maximum Average Forward Current See Fig.1	I <sub>F(AV)</sub>	1.0								A	
Maximum Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	40								A	
Maximum Forward Voltage at I <sub>F</sub> = 1.0 A	V <sub>F</sub>	0.50		0.75		0.80				V	
Maximum Reverse Current at Ta = 25 °C	I <sub>R</sub>	0.5								mA	
Rated DC Blocking Voltage <sup>(1)</sup> Ta = 100 °C	I <sub>R(H)</sub>	10		5.0						mA	
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJL</sub>	35								°C/W	
Operating Junction Temperature Range	T <sub>J</sub>	- 65 to + 125				- 65 to + 150					°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 150									°C

#### Notes:


- (1) Pulse Test : Pulse Width = 300 μs, Duty Cycle = 2%.
- (2) Mounted on P.C. Board with 5.0 mm<sup>2</sup> (0.013mm thick) copper pad areas.

## RATING AND CHARACTERISTIC CURVES ( SS12 - SS110 )


**FIG.1 - FORWARD CURRENT DERATING CURVE**

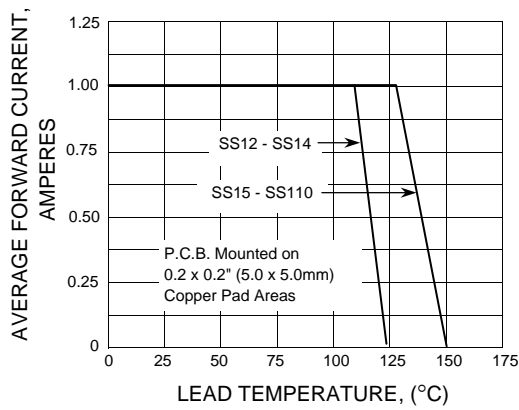

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

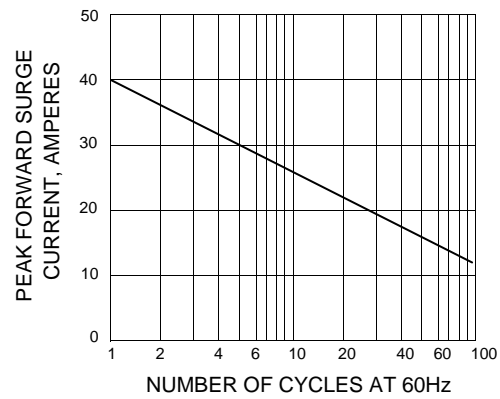

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

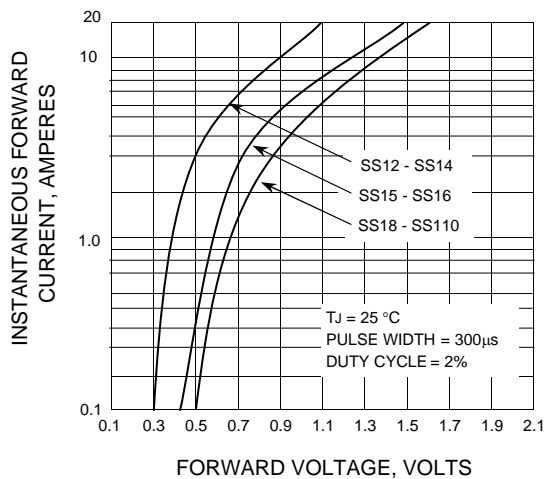

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

