




# SS32 THRU SS310

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 3.0 Amperes

### DO-214AC/SMA

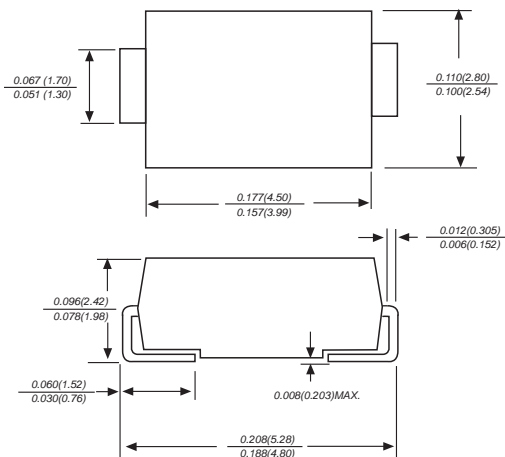

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

### MECHANICAL DATA

**Case:** JEDEC DO-214AC molded plastic body  
**Terminals:** leads solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.002 ounce, 0.07 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| MDD Catalog Number  | SYMBOLS         | SS32        | SS33 | SS34 | SS35 | SS36 | SS38        | SS310 | UNITS |
|---|-----------------|-------------|------|------|------|------|-------------|-------|-------|
| Maximum repetitive peak reverse voltage   | $V_{RRM}$       | 20          | 30   | 40   | 50   | 60   | 80          | 100   | VOLTS |
| Maximum RMS voltage   | $V_{RMS}$       | 14          | 21   | 28   | 35   | 42   | 56          | 70    | VOLTS |
| Maximum DC blocking voltage   | $V_{DC}$        | 20          | 30   | 40   | 50   | 60   | 80          | 100   | VOLTS |
| Maximum average forward rectified current at $T_L$ (see fig.1)                                      | $I_{AV}$        | 3.0         |      |      |      |      |             |       | Amps  |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | $I_{FSM}$       | 100.0       |      |      |      |      |             |       | Amps  |
| Maximum instantaneous forward voltage at 3.0A   | $V_F$           | 0.55        |      | 0.70 |      | 0.85 |             | Volts |       |
| Maximum DC reverse current<br>at rated DC blocking voltage  | $I_R$           | 0.5         |      |      |      |      |             |       | mA    |
| $T_A=25^\circ\text{C}$<br>$T_A=100^\circ\text{C}$   |                 | 20          |      |      |      | 10   |             |       |       |
| Typical junction capacitance (NOTE 1)   | $C_J$           | 500         |      |      | 300  |      |             | pF    |       |
| Typical thermal resistance (NOTE 2)   | $R_{\theta JA}$ | 55.0        |      |      |      |      |             |       | °C/W  |
| Operating junction temperature range  | $T_J$           | -50 to +125 |      |      |      |      | -50 to +150 |       | °C    |
| Storage temperature range   | $T_{STG}$       | -50 to +150 |      |      |      |      |             |       | °C    |


**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SS32 THRU SS310


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

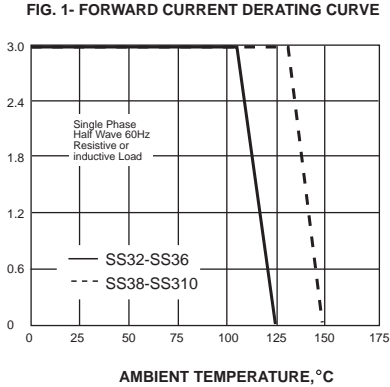


PEAK FORWARD SURGE CURRENT, AMPERES

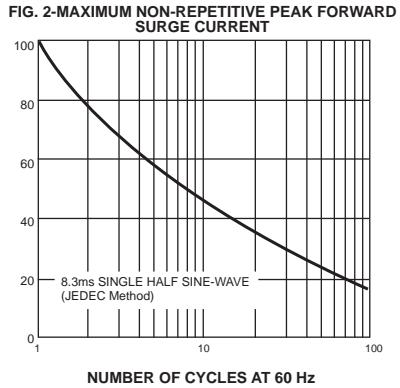


INSTANTANEOUS FORWARD CURRENT, AMPERES

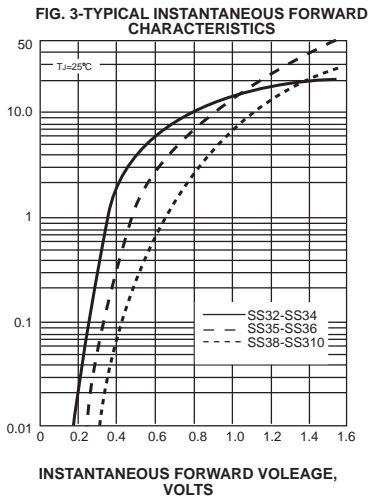

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

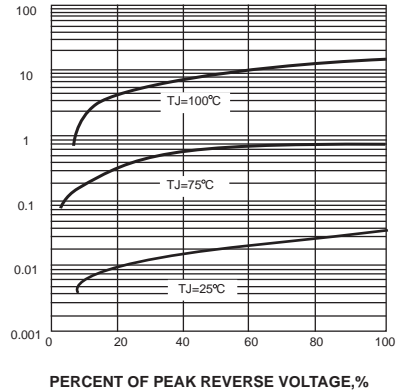

JUNCTION CAPACITANCE, pF

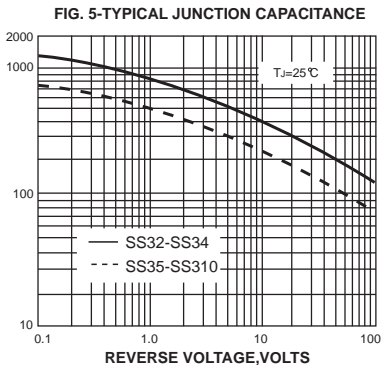

TRANSIENT THERMAL IMPEDANCE, °C/W

