


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS	REVERSE VOLTAGE - 20 to 100 Volts FORWARD CURRENT - 3.0 Amperes
------------------------------------------------------	----------------------------------------------------------------------------------

FEATURES

- For surface mounted applications
- Metal-Semiconductor junction with guarding
- Epitaxial construction
- Very low forward voltage drop
- High current capability
- Plastic material has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

MECHANICAL DATA

- Case: Molded Plastic
- Polarity: Color band denotes cathode
- Weight: 0.003 ounces, 0.093 grams

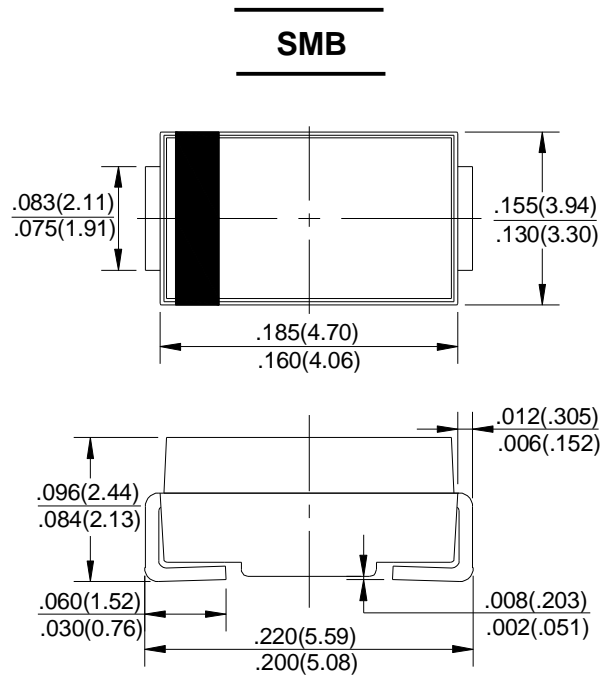

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SS32B	SS33B	SS34B	SS35B	SS36B	SS38B	SS310B	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current @ T _L =100 °C	I <sub(av)< sub=""></sub(av)<>	3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed On Rated Load (JEDEC Method)	I _{FSM}	80							A
Maximum Forward Voltage at 3.0A DC	V _F	0.45	0.55	0.6	0.7		0.85		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ T _J =25°C @ T _J =100°C	I _R	1.0							mA
Typical Junction Capacitance (Note1)	C _J	250							pF
Typical Thermal Resistance (Note2)	R _{θJL}	10							°C/W
Typical Thermal Resistance (Note3)	R _{θJA}	50							°C/W
Operating Temperature Range	T _J	-55 to + 150							°C
Storage Temperature Range	T _{STG}	-55 to + 150							°C

NOTES: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance junction to lead.

3. Thermal resistance junction to ambient.

RATING AND CHARACTERISTIC CURVES
SS32B thru SS310B



FIG. 1 - FORWARD CURRENT DERATING CURVE

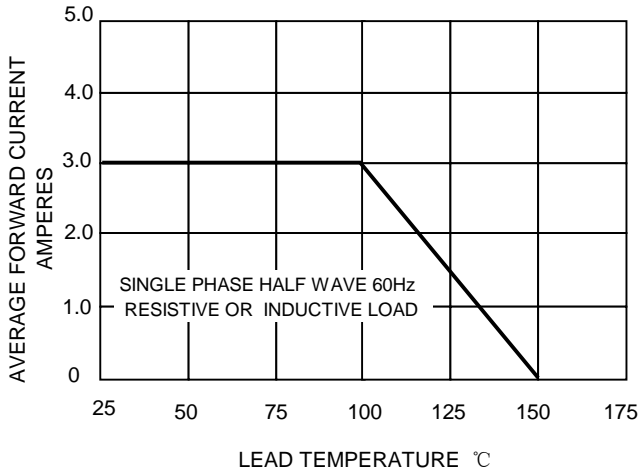


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

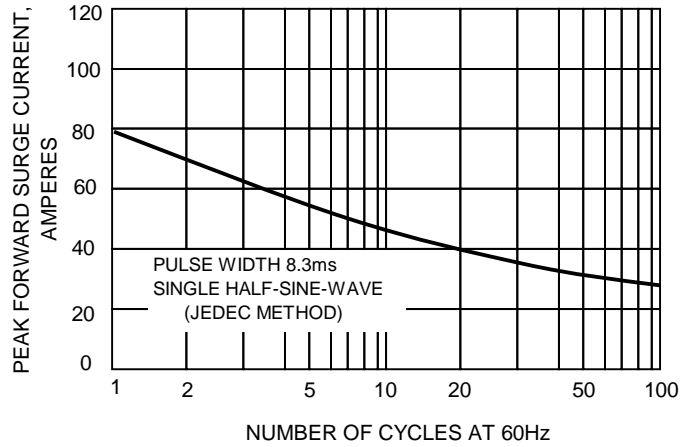


FIG.3-TYPICAL FORWARD CHARACTERISTICS

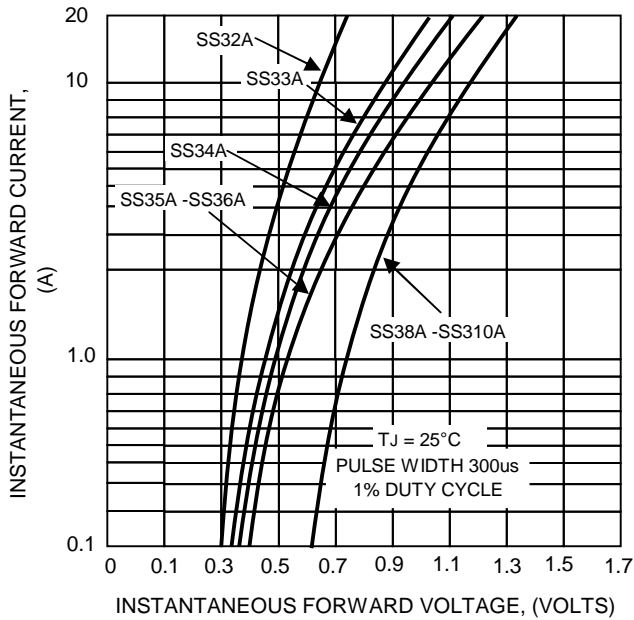


FIG.4-TYPICAL JUNCTION CAPACITANCE

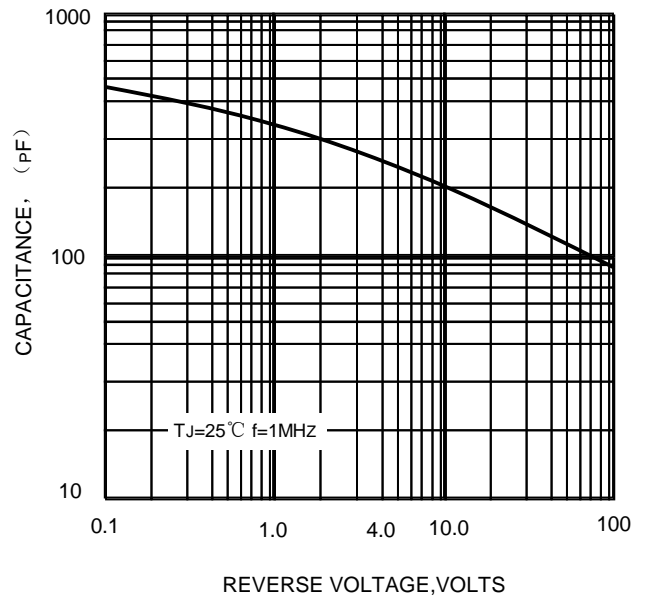


FIG.5-TYPICAL REVERSE CHARACTERISTICS

