


ST 2SC945

NPN Silicon Epitaxial Planar Transistor

for switching and AF amplifier applications.

The transistor is subdivided into five groups, R, O, Y, P and L, according to its DC current gain. As complementary type the PNP transistor ST 2SA733 is recommended.

On special request, these transistors can be manufactured in different pin configurations.

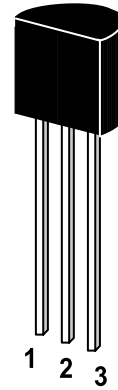


1. Emitter 2. Collector 3. Base

TO-92 Plastic Package
Weight approx. 0.19g

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	60	V
Collector Emitter Voltage	V_{CEO}	50	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	150	mA
Power Dissipation	P_{tot}	250	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +150	$^\circ\text{C}$



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




ISO/TS 16949 : 2002 Certificate No. 05103
ISO 14001:2004 Certificate No. 7116
ISO 9001:2000 Certificate No. 0506098

Dated : 22/07/2004

ST 2SC945

Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE}=6\text{V}$, $I_C=1\text{mA}$					
Current Gain Group R	h_{FE}	40	-	80	-
O	h_{FE}	70	-	140	-
Y	h_{FE}	120	-	240	-
P	h_{FE}	200	-	400	-
L	h_{FE}	350	-	700	-
Collector Base Breakdown Voltage at $I_C=100\mu\text{A}$	$V_{(BR)CBO}$	60	-	-	V
Collector Emitter Breakdown Voltage at $I_C=10\text{mA}$	$V_{(BR)CEO}$	50	-	-	V
Emitter Base Breakdown Voltage at $I_E=10\mu\text{A}$	$V_{(BR)EBO}$	5	-	-	V
Collector Cutoff Current at $V_{CB}=40\text{V}$	I_{CBO}	-	-	0.1	μA
Emitter Cutoff Current at $V_{EB}=3\text{V}$	I_{EBO}	-	-	0.1	μA
Collector Saturation Voltage at $I_C=100\text{mA}$, $I_B=10\text{mA}$	$V_{CE(sat)}$	-	0.15	0.3	V
Gain Bandwidth Product at $V_{CE}=6\text{V}$, $I_C=10\text{mA}$	f_T	-	300	-	MHz
Output Capacitance at $V_{CB}=6\text{V}$, $f=1\text{MHz}$	C_{OB}	-	2.5	-	pF
Noise Figure at $V_{CE}=6\text{V}$, $I_E=0.5\text{mA}$ at $f=1\text{KHz}$, $R_S=500\Omega$	NF	-	4	-	dB



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103










ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098

Dated : 22/07/2004

ST 2SC945

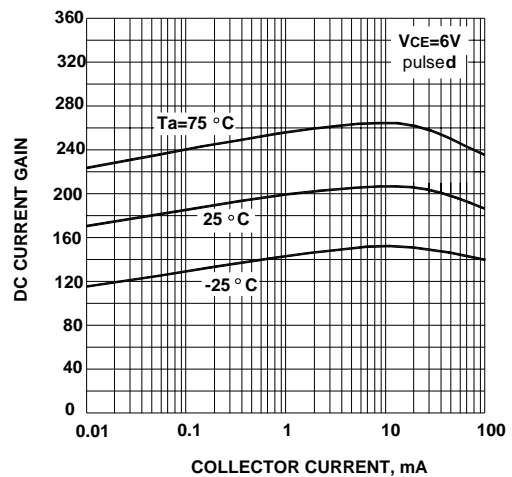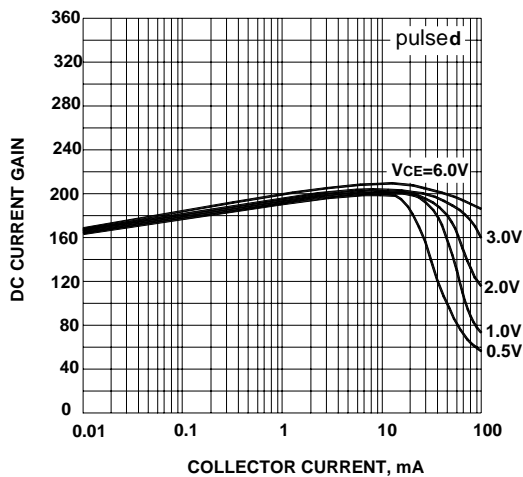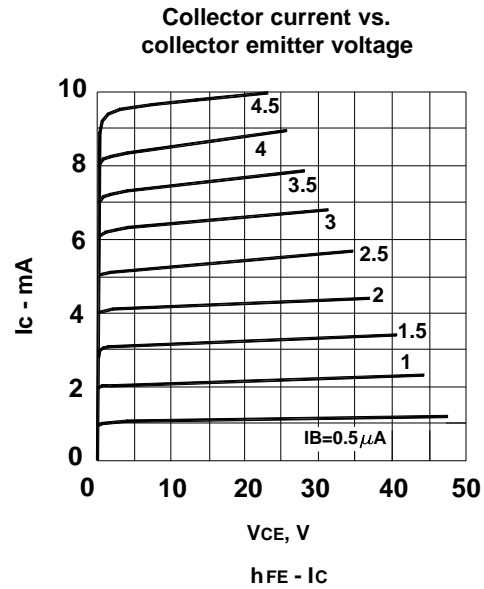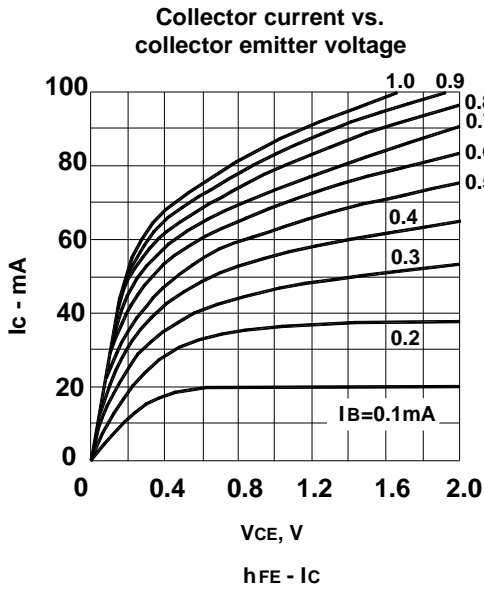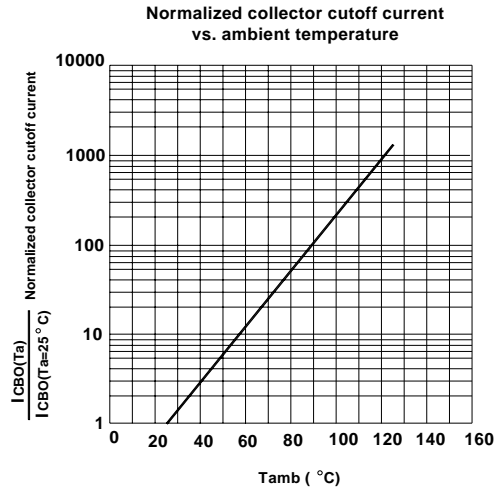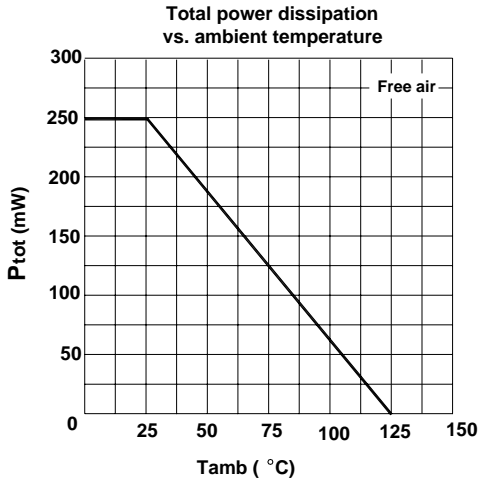

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103




ISO 14001:2004
Certificate No. 71116




ISO 9001:2000
Certificate No. 0506098

ST 2SC945


Collector current vs. base emitter voltage

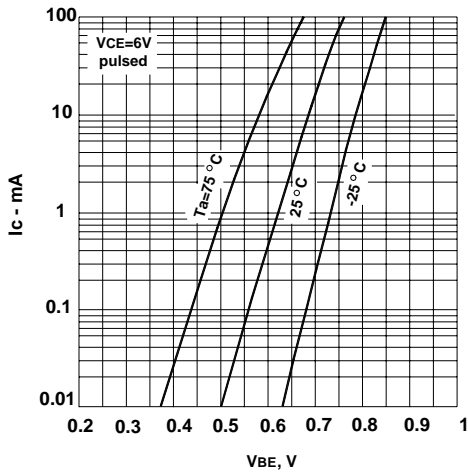


Normalized h-parameters vs. collector current

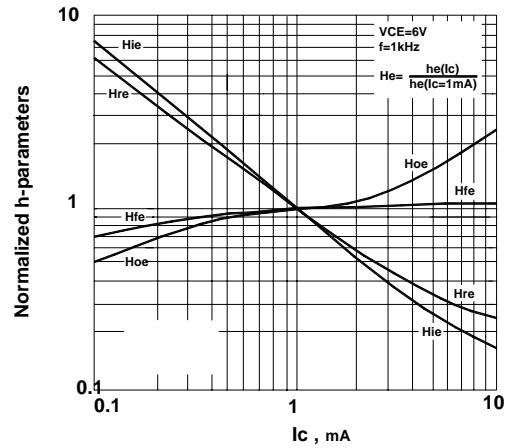


Collector and base saturation voltage vs. collector current

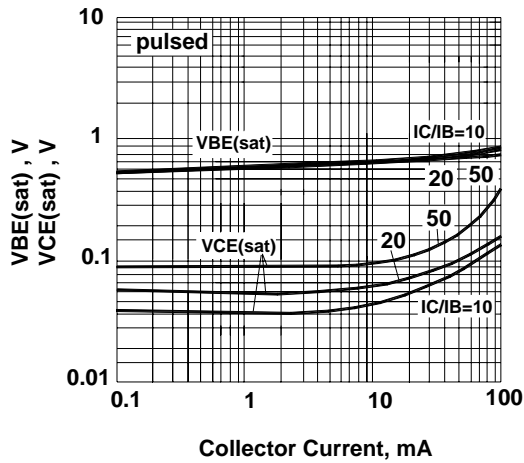



ft - IE

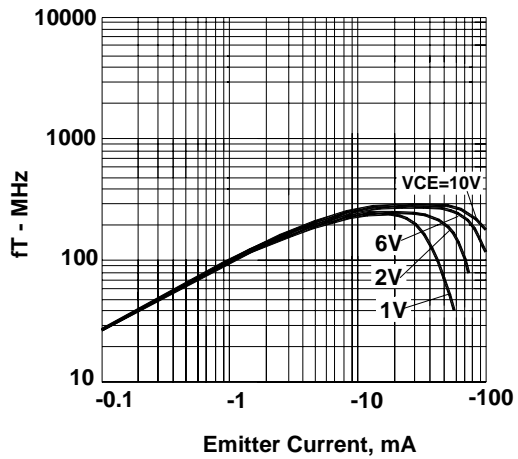

VEB, VCB vs. Cib, Cob

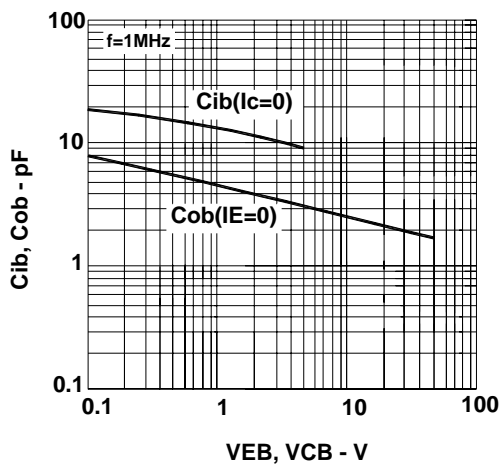

Small signal current gain vs. DC current gain

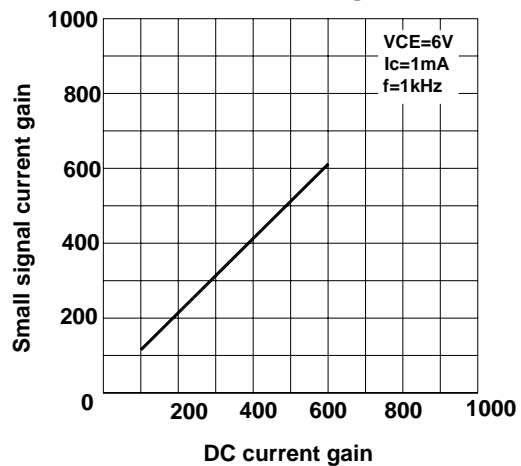

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103






ISO 14001:2004
Certificate No. 71116



ISO 9001:2000
Certificate No. 0506098

ST 2SC945

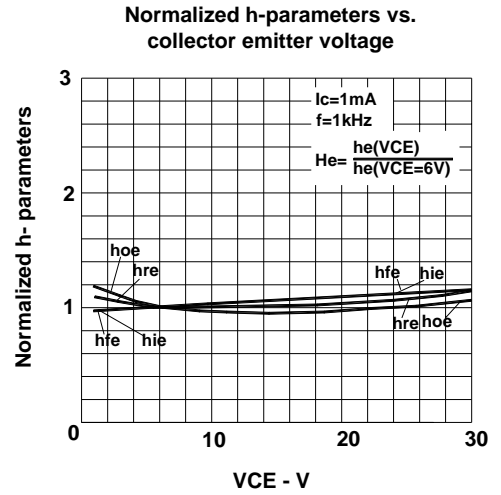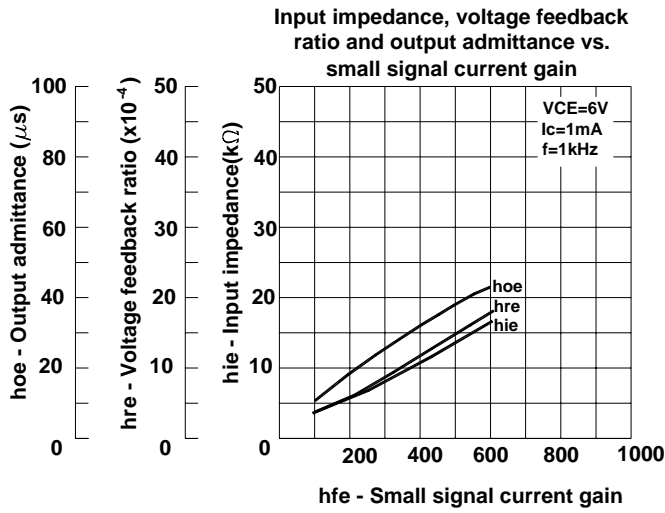

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

