


STK-024, 031,035

thick film hybrid IC

20 to 30Wmin AF POWER AMP.



Features

- © IMST, 1 Channel by 1 Power Supply.
- AF output power STK-024: 20W min.
STK-031: 25W min.
STK-035: 30W min.
- Emitter feedbacked direct coupled amp. Small shock noise.

MAXIMUM RATINGS / Ta=25°C

		STK-024	STK-031	STK-035	unit
Maximum Supply Voltage	V _{CC} max (pin 0 to 8)	60	66	70	V
Operating Case Temperature	T _C	→	85	←	°C
Storage Temperature	T _{stg}	→	-30 to +100	←	°C
Allowable Loading Shorting Time t _s	recommended operation condition, rated power output, f=50Hz	→	2	←	sec


RECOMMENDED OPERATION CONDITION / Ta=25°C

		STK-024	STK-031	STK-035	unit
Recommended Supply Voltage	V _{CC}	44	48	54	V
Load Resistance	R _L	→	8	←	ohm

OPERATION CHARACTERISTICS / Ta=25°C, in recommended condition, R_g=600 ohm, f=1kHz

		STK-024	STK-031	STK-035	unit
Quiescent Current	I _{CCO}	→	50	←	mA max
Output Power	P _o THD=0.5%	20	25	30	Wmin
Voltage Gain	V _G P _o =0.1W	→	30	←	dB
Distortion	THD P _o =0.1W	→	0.2	←	%max
Input Resistance	r _i P _o =0.1W	30k	30k	30k	ohm
Power Bandwidth	PBW THD=0.5%, -3dB	20-30k	20-30k	20-20k	Hz

EQUIVALENT CIRCUIT

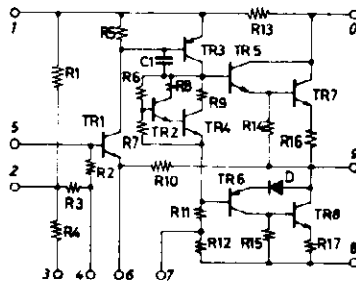

APPLICATION: AF Power Amp.

