

Small kVA 3 Phase Isolation Transformer**TT2142-TT2148**

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	415 Delta	Frequency:	50 Hz
Output Voltage:	600Y/347	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insulation Class:	Class F 155° C	Temp Rise:	N/A
Impedance:	2.5 - 3.5%		

NEMA 1 Enclosure

10 Full 10 Year Warranty**Feature Highlights**

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT2142-TT2148

60 Hz

TT2142	350 VA
TT2143	500 VA
TT2144	750 VA
TT2145	1000 VA
TT2146	1500 VA
TT2147	2000 VA
TT2148	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
415	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
600 (347)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

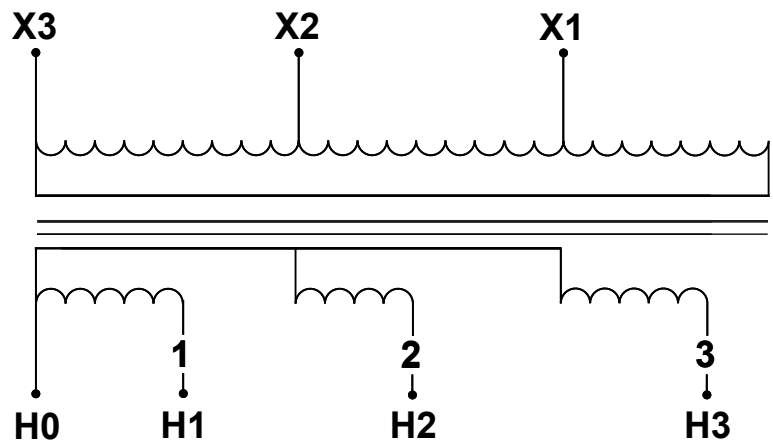


Small kVA 3 Phase Isolation Transformer

TT2142-TT2148

Enclosed Units

VA	350	500	750	1000	1500	2000	3000
Part # 60 Hz	TT2142	TT2143	TT2144	TT2145	TT2146	TT2147	TT2148
Enclosure #	1	1	2	2	2	2	2
Enclosure Weight (lbs.)	22	24	37	40	54	60	69

No. 1 ENCLOSURE (With 4 x 0.5" mounting holes)

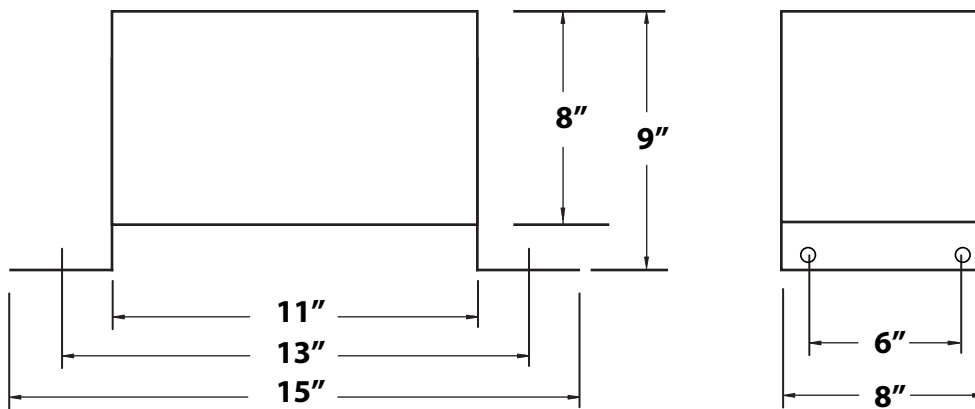

No. 2 ENCLOSURE (With 4 x 0.5" mounting holes)

