

# Silicon Epitaxial Planar Z-Diodes

## Features

- Very sharp reverse characteristic
- Low reverse current level
- Very high stability
- Low noise
- Available with tighter tolerances



94 9367

## Applications

Voltage stabilization

## Absolute Maximum Ratings

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Value	Unit
Power dissipation	$l=4\text{mm}, T_L=25^\circ\text{C}$		$P_V$	500	mW
Z-current			$I_Z$	$P_V/V_Z$	mA
Junction temperature			$T_j$	175	$^\circ\text{C}$
Storage temperature range			$T_{\text{stg}}$	-65...+175	$^\circ\text{C}$

## Maximum Thermal Resistance

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	$l=4\text{mm}, T_L=\text{constant}$	$R_{\text{thJA}}$	300	K/W

## Electrical Characteristics

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=200\text{mA}$		$V_F$			1.5	V

Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	r <sub>Zmax.</sub> (Ω)	at I <sub>Z</sub> (mA)	I <sub>Rmax.</sub> (μA)	at V <sub>R</sub> (V)
TZX2V4	2.3	2.6	TZX2V4A	2.3	2.5	100	5	5	0.5
TZX2V4	2.3	2.6	TZX2V4B	2.4	2.6	100	5	5	0.5
TZX2V7	2.5	2.9	TZX2V7A	2.5	2.7	100	5	5	0.5
TZX2V7	2.5	2.9	TZX2V7B	2.6	2.8	100	5	5	0.5
TZX2V7	2.5	2.9	TZX2V7C	2.7	2.9	100	5	5	0.5
TZX3V0	2.8	3.2	TZX3V0A	2.8	3.0	100	5	5	0.5
TZX3V0	2.8	3.2	TZX3V0B	2.9	3.1	100	5	5	0.5
TZX3V0	2.8	3.2	TZX3V0C	3.0	3.2	100	5	5	0.5
TZX3V3	3.1	3.5	TZX3V3A	3.1	3.3	100	5	5	1
TZX3V3	3.1	3.5	TZX3V3B	3.2	3.4	100	5	5	1
TZX3V3	3.1	3.5	TZX3V3C	3.3	3.5	100	5	5	1
TZX3V6	3.4	3.8	TZX3V6A	3.4	3.6	100	5	5	1
TZX3V6	3.4	3.8	TZX3V6B	3.5	3.7	100	5	5	1
TZX3V6	3.4	3.8	TZX3V6C	3.6	3.8	100	5	5	1
TZX3V9	3.7	4.1	TZX3V9A	3.7	3.9	100	5	5	1
TZX3V9	3.7	4.1	TZX3V9B	3.8	4.0	100	5	5	1
TZX3V9	3.7	4.1	TZX3V9C	3.9	4.1	100	5	5	1
TZX4V3	4.0	4.5	TZX4V3A	4.0	4.2	100	5	5	1.5
TZX4V3	4.0	4.5	TZX4V3B	4.1	4.3	100	5	5	1.5
TZX4V3	4.0	4.5	TZX4V3C	4.2	4.4	100	5	5	1.5
TZX4V3	4.0	4.5	TZX4V3D	4.3	4.5	100	5	5	1.5
TZX4V7	4.4	4.9	TZX4V7A	4.4	4.6	100	5	5	2
TZX4V7	4.4	4.9	TZX4V7B	4.5	4.7	100	5	5	2
TZX4V7	4.4	4.9	TZX4V7C	4.6	4.8	100	5	5	2
TZX4V7	4.4	4.9	TZX4V7D	4.7	4.9	100	5	5	2
TZX5V1	4.8	5.3	TZX5V1A	4.8	5.0	100	5	5	2
TZX5V1	4.8	5.3	TZX5V1B	4.9	5.1	100	5	5	2
TZX5V1	4.8	5.3	TZX5V1C	5.0	5.2	100	5	5	2
TZX5V1	4.8	5.3	TZX5V1D	5.1	5.3	100	5	5	2
TZX5V6	5.2	5.9	TZX5V6A	5.2	5.5	40	5	5	2
TZX5V6	5.2	5.9	TZX5V6B	5.3	5.6	40	5	5	2
TZX5V6	5.2	5.9	TZX5V6C	5.4	5.7	40	5	5	2
TZX5V6	5.2	5.9	TZX5V6D	5.5	5.8	40	5	5	2
TZX5V6	5.2	5.9	TZX5V6E	5.6	5.9	40	5	5	2
TZX6V2	5.7	6.6	TZX6V2A	5.7	6.0	15	5	1	3
TZX6V2	5.7	6.6	TZX6V2B	5.8	6.1	15	5	1	3
TZX6V2	5.7	6.6	TZX6V2C	6.0	6.3	15	5	1	3
TZX6V2	5.7	6.6	TZX6V2D	6.1	6.4	15	5	1	3
TZX6V2	5.7	6.6	TZX6V2E	6.3	6.6	15	5	1	3
TZX6V8	6.4	7.2	TZX6V8A	6.4	6.7	15	5	1	3.5
TZX6V8	6.4	7.2	TZX6V8B	6.6	6.9	15	5	1	3.5
TZX6V8	6.4	7.2	TZX6V8C	6.7	7.0	15	5	1	3.5
TZX6V8	6.4	7.2	TZX6V8D	6.9	7.2	15	5	1	3.5
TZX7V5	7.0	7.9	TZX7V5A	7.0	7.3	15	5	1	5.0
TZX7V5	7.0	7.9	TZX7V5B	7.2	7.6	15	5	1	5.0

**TZX...****Vishay Telefunken**

Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	r <sub>Zmax.</sub> (Ω)	at I <sub>Z</sub> (mA)	I <sub>Rmax.</sub> (μA)	at V <sub>R</sub> (V)
TZX7V5	7.0	7.9	TZX7V5C	7.3	7.7	15	5	1	5.0
TZX7V5	7.0	7.9	TZX7V5D	7.5	7.9	15	5	1	5.0
TZX8V2	7.7	8.7	TZX8V2A	7.7	8.1	20	5	1	6.2
TZX8V2	7.7	8.7	TZX8V2B	7.9	8.3	20	5	1	6.2
TZX8V2	7.7	8.7	TZX8V2C	8.1	8.5	20	5	1	6.2
TZX8V2	7.7	8.7	TZX8V2D	8.3	8.7	20	5	1	6.2
TZX9V1	8.5	9.7	TZX9V1A	8.5	8.9	20	5	1	6.8
TZX9V1	8.5	9.7	TZX9V1B	8.7	9.1	20	5	1	6.8
TZX9V1	8.5	9.7	TZX9V1C	8.9	9.3	20	5	1	6.8
TZX9V1	8.5	9.7	TZX9V1D	9.1	9.5	20	5	1	6.8
TZX9V1	8.5	9.7	TZX9V1E	9.3	9.7	20	5	1	6.8
TZX10	9.5	10.6	TZX10A	9.5	9.9	25	5	1	7.5
TZX10	9.5	10.6	TZX10B	9.7	10.1	25	5	1	7.5
TZX10	9.5	10.6	TZX10C	9.9	10.3	25	5	1	7.5
TZX10	9.5	10.6	TZX10D	10.2	10.6	25	5	1	7.5
TZX11	10.4	11.6	TZX11A	10.4	10.8	25	5	1	8.2
TZX11	10.4	11.6	TZX11B	10.7	11.1	25	5	1	8.2
TZX11	10.4	11.6	TZX11C	10.9	11.3	25	5	1	8.2
TZX11	10.4	11.6	TZX11D	11.1	11.6	25	5	1	8.2
TZX12	11.4	12.7	TZX12A	11.4	11.9	35	5	1	9.5
TZX12	11.4	12.7	TZX12B	11.6	12.1	35	5	1	9.5
TZX12	11.4	12.7	TZX12C	11.9	12.4	35	5	1	9.5
TZX12	11.4	12.7	TZX12D	12.2	12.7	35	5	1	9.5
TZX13	12.4	13.4	TZX13A	12.4	12.9	35	5	1	10
TZX13	12.4	13.4	TZX13B	12.6	13.1	35	5	1	10
TZX13	12.4	13.4	TZX13C	12.9	13.4	35	5	1	10
TZX14	13.2	14.3	TZX14A	13.2	13.7	35	5	1	11
TZX14	13.2	14.3	TZX14B	13.5	14.0	35	5	1	11
TZX14	13.2	14.3	TZX14C	13.8	14.3	35	5	1	11
TZX15	14.1	15.5	TZX15A	14.1	14.7	40	5	1	11.5
TZX15	14.1	15.5	TZX15B	14.5	15.1	40	5	1	11.5
TZX15	14.1	15.5	TZX15C	14.9	15.5	40	5	1	11.5
TZX16	15.3	17.1	TZX16A	15.3	15.9	45	5	1	12
TZX16	15.3	17.1	TZX16B	15.7	16.5	45	5	1	12
TZX16	15.3	17.1	TZX16C	16.3	17.1	45	5	1	12
TZX18	16.9	19.0	TZX18A	16.9	17.7	55	5	1	13
TZX18	16.9	19.0	TZX18B	17.5	18.3	55	5	1	13
TZX18	16.9	19.0	TZX18C	18.1	19.0	55	5	1	13
TZX20	18.8	21.2	TZX20A	18.8	19.7	60	2	1	15
TZX20	18.8	21.2	TZX20B	19.5	20.4	60	2	1	15
TZX20	18.8	21.2	TZX20C	20.2	21.2	60	2	1	15
TZX22	20.9	23.3	TZX22A	20.9	21.9	65	2	1	17
TZX22	20.9	23.3	TZX22B	21.6	22.6	65	2	1	17
TZX22	20.9	23.3	TZX22C	22.3	23.3	65	2	1	17
TZX24	22.9	25.5	TZX24A	22.9	24.0	70	2	1	19
TZX24	22.9	25.5	TZX24B	23.6	24.7	70	2	1	19

Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	Type	V <sub>Zmin.</sub> (V)	V <sub>Zmax.</sub> (V)	r <sub>Zmax.</sub> (Ω)	at I <sub>Z</sub> (mA)	I <sub>Rmax.</sub> (μA)	at V <sub>R</sub> (V)
TZX24	22.9	25.5	TZX24C	24.3	25.5	70	2	1	19
TZX27	25.2	28.6	TZX27A	25.2	26.6	80	2	1	21
TZX27	25.2	28.6	TZX27B	26.2	27.6	80	2	1	21
TZX27	25.2	28.6	TZX27C	27.2	28.6	80	2	1	21
TZX30	28.2	31.6	TZX30A	28.2	29.6	100	2	1	23
TZX30	28.2	31.6	TZX30B	29.2	30.6	100	2	1	23
TZX30	28.2	31.6	TZX30C	30.2	31.6	100	2	1	23
TZX33	31.2	34.5	TZX33A	31.2	32.6	120	2	1	25
TZX33	31.2	34.5	TZX33B	32.2	33.6	120	2	1	25
TZX33	31.2	34.5	TZX33C	33.2	34.5	120	2	1	25
TZX36	34.2	38.0	TZX36A	34.2	35.7	140	2	1	27
TZX36	34.2	38.0	TZX36B	35.3	36.8	140	2	1	27
TZX36	34.2	38.0	TZX36C	36.4	38.0	140	2	1	27

Characteristics (T<sub>j</sub> = 25°C unless otherwise specified)

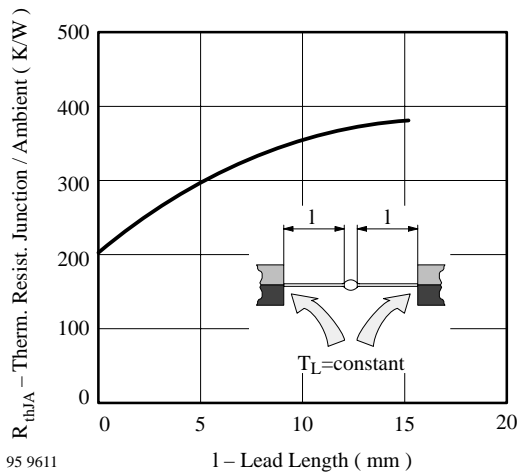


Figure 1. Thermal Resistance vs. Lead Length



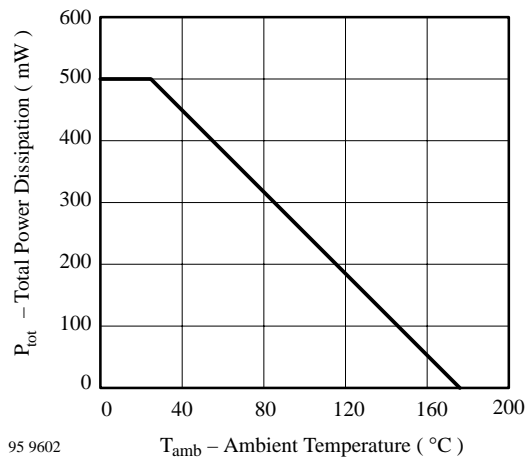


Figure 2. Total Power Dissipation vs. Ambient Temperature

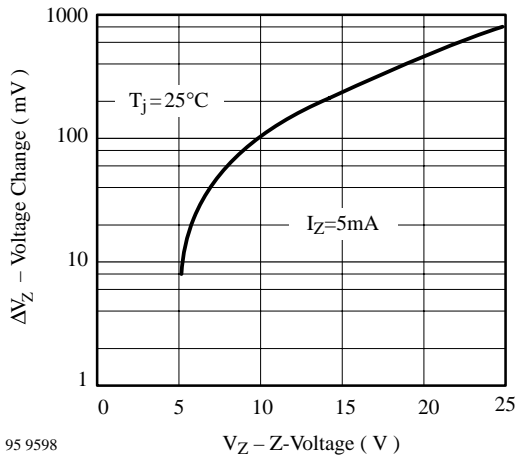


95 9598

Figure 3. Typical Change of Working Voltage under Operating Conditions at  $T_{amb}=25^{\circ}C$

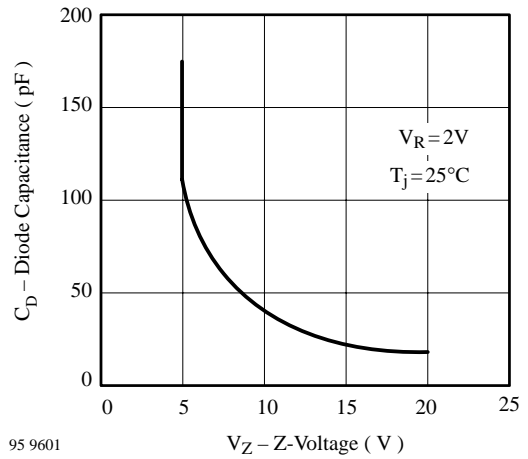


95 9601

Figure 6. Diode Capacitance vs. Z-Voltage

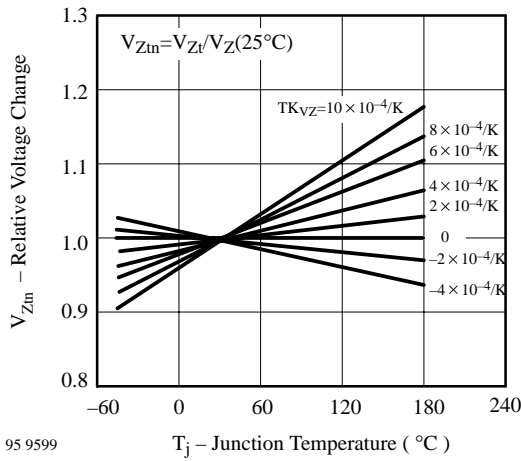


95 9599

Figure 4. Typical Change of Working Voltage vs. Junction Temperature

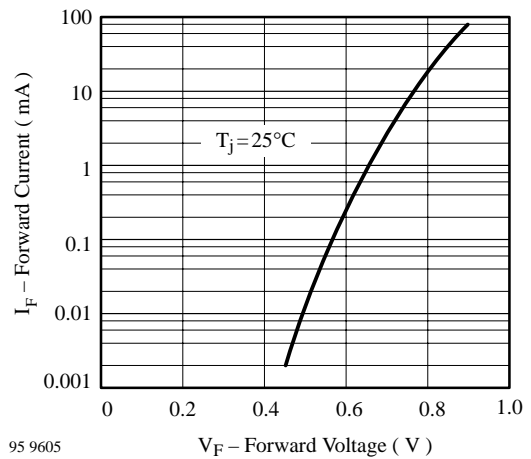


95 9605

Figure 7. Forward Current vs. Forward Voltage

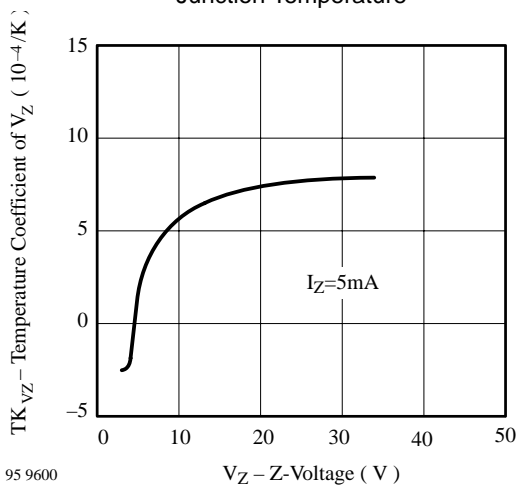


95 9600

Figure 5. Temperature Coefficient of  $V_Z$  vs. Z-Voltage

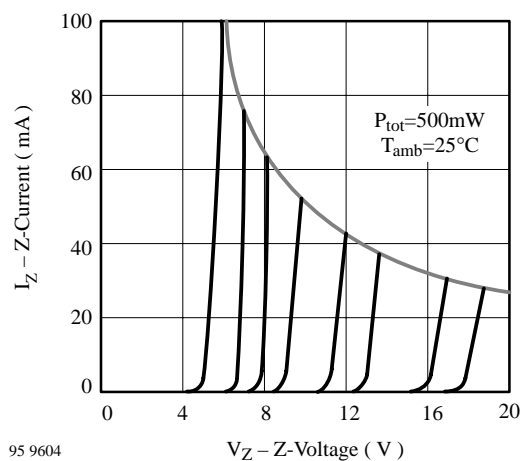


95 9604

Figure 8. Z-Current vs. Z-Voltage

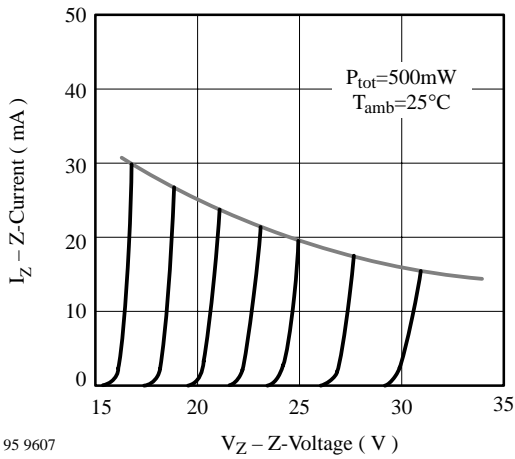


95 9607

Figure 9. Z-Current vs. Z-Voltage

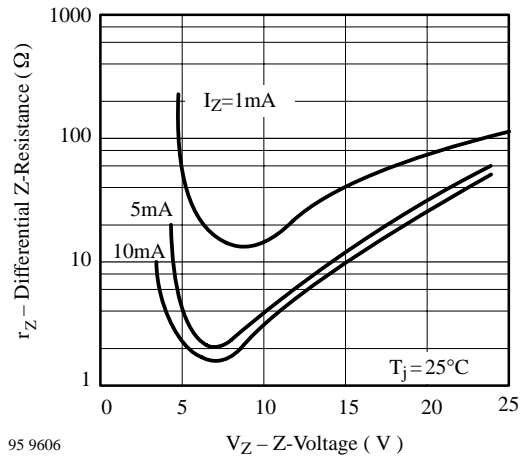

95 9606


Figure 10. Differential Z-Resistance vs. Z-Voltage

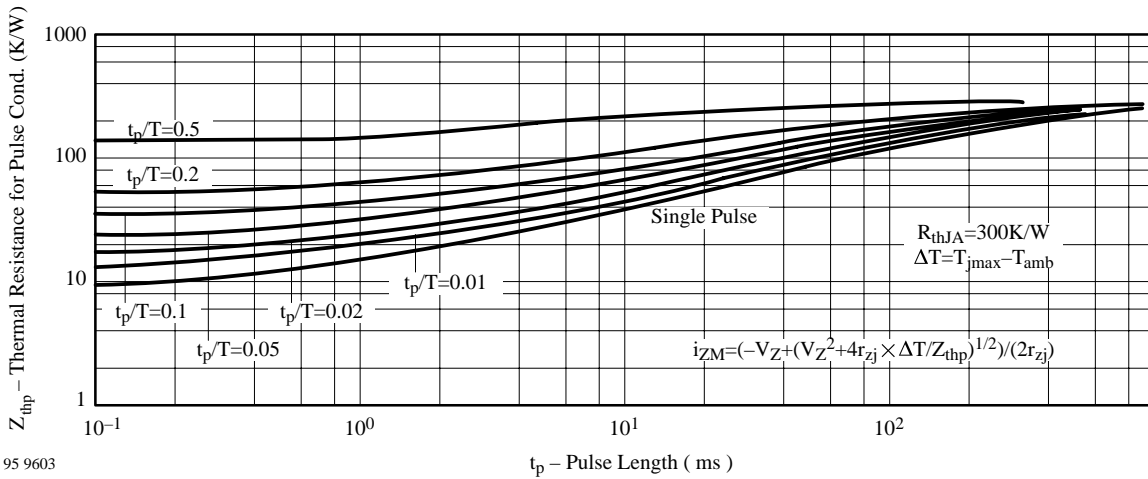

95 9603

Figure 11. Thermal Response

### Dimensions in mm

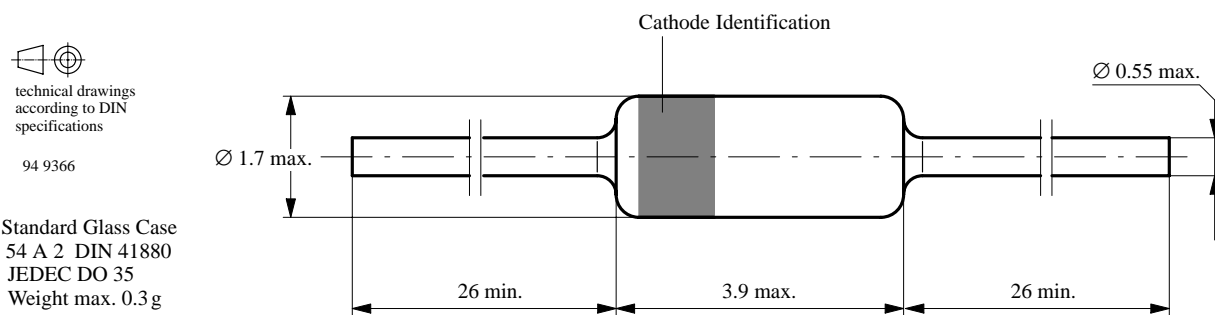



## Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423