

UNBUMPED FLIP CHIP ARRAY

APPLICATIONS

- ✓ Cellular Phones
- ✓ MCM Boards
- ✓ Wireless Communication Circuits
- ✓ IR LEDs
- ✓ SMART & PCMCIA Cards

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns


FEATURES

- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Multiple Voltage Types Ranging From 3.3V to 36V
- ✓ 250 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 1 to 3 Lines
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Standard EIA Chip Size: 0404
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Solder Reflow Temperature:
 - Tin-Lead - Sn/Pb: 240-245°C
 - Lead-Free: 260-270°C
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel

PIN CONFIGURATION





DEVICE CHARACTERISTICS

| MAXIMUM RATINGS @ 25°C Unless Otherwise Specified | | | |
|---|-----------|----------------|-------|
| PARAMETER | SYMBOL | VALUE | UNITS |
| Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1 | P_{PP} | 250 | Watts |
| Operating Temperature | T_J | -55°C to 150°C | °C |
| Storage Temperature | T_{STG} | -55°C to 150°C | °C |




| ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified | | | | | | |
|---|--|------------------------------|--|--|---|------------------------|
| PART NUMBER (See Note 1) | RATED STAND-OFF VOLTAGE V_{WM} VOLTS | MINIMUM BREAKDOWN VOLTAGE | MAXIMUM CLAMPING VOLTAGE (See Fig. 2) | MAXIMUM CLAMPING VOLTAGE (See Fig. 2) | MAXIMUM LEAKAGE CURRENT (See Note 2) | TYPICAL CAPACITANCE |
| | | @ 1mA $V_{(BR)}$ VOLTS | @ $I_p = 1A$ V_C VOLTS | @ 8/20 μs $V_C @ I_{PP}$ | @ V_{WM} I_D μA | @ 0V, 1 MHz C pF |
| U0404FC3.3C | 3.3 | 4.0 | 7.0 | 12.5V @ 20A | 75* | 150 |
| U0404FC05C | 5.0 | 6.0 | 9.8 | 14.7V @ 17A | 10** | 100 |
| U0404FC08C | 8.0 | 8.5 | 13.4 | 19.2V @ 13A | 10*** | 75 |
| U0404FC12C | 12.0 | 13.3 | 19.0 | 29.7V @ 9.0A | 1 | 50 |
| U0404FC15C | 15.0 | 16.7 | 24.0 | 35.7V @ 7.0A | 1 | 40 |
| U0404FC24C | 24.0 | 26.7 | 43.0 | 55.0V @ 5.0A | 1 | 30 |
| U0404FC36C | 36.0 | 40.0 | 64.0 | 84.0V @ 3.0A | 1 | 25 |

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.

Note 2: *Maximum leakage current < 5 μA @ 2.8V. **Maximum leakage current < 500nA @ 3.3V. ***Maximum leakage current < 200nA @ 5V.

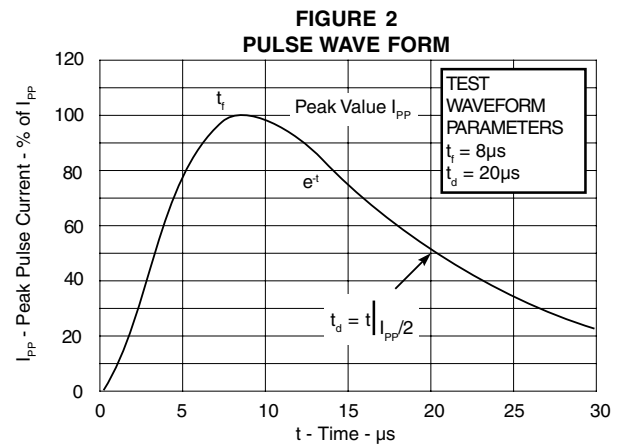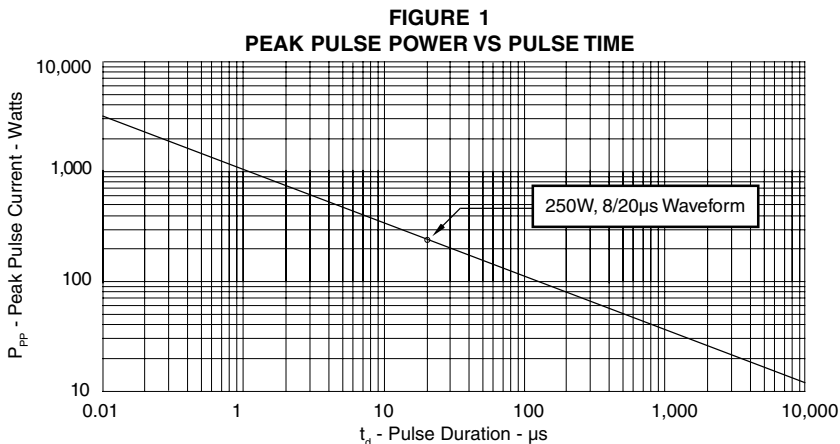

GRAPHS

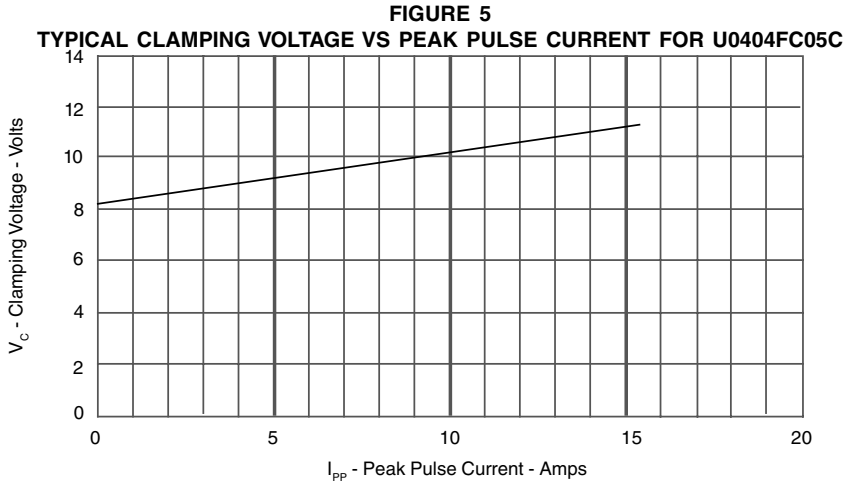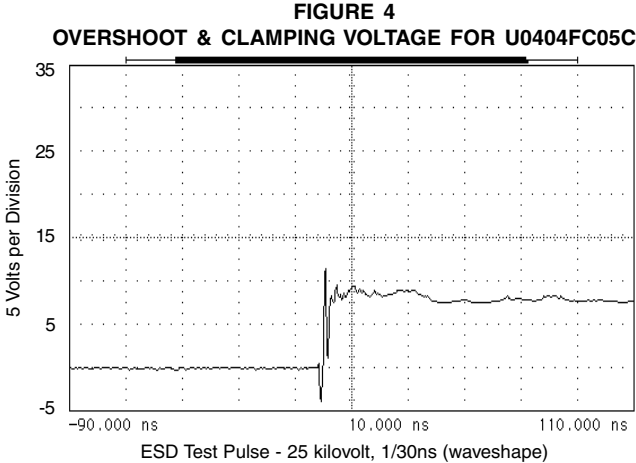
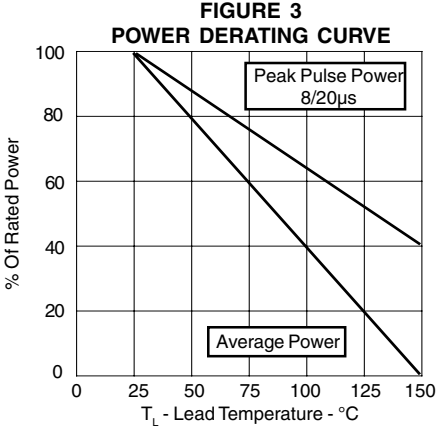


APPLICATION INFORMATION

| PRINTED CIRCUIT BOARD RECOMMENDATIONS | |
|---|------------------------------|
| PARAMETER | VALUE |
| Pad Size on PCB | 0.275mm |
| Pad Shape | Round |
| Pad Definition | Non-Solder Mask Defined Pads |
| Solder Mask Opening | 0.325mm Round |
| Solder Stencil Thickness | 0.150mm |
| Solder Stencil Aperture Opening (laser cut, 5% tapered walls) | 0.330mm Round |
| Solder Paste Type | No Clean |
| Pad Protective Finish | OSP (Entek Cu Plus 106A) |
| Tolerance - Edge To Corner Ball | ±50µm |
| Solder Ball Side Coplanarity | ±20µm |
| Maximum Dwell Time Above Liquidous (183°C) | 60 Seconds |
| Soldering Maximum Temperature | 270°C |


| REQUIREMENTS |
|---|
| <p>Temperature: T_p for Lead-Free (SnAgCu): 260-265°C T_p for Tin-Lead: 240-245°C Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.</p> |

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

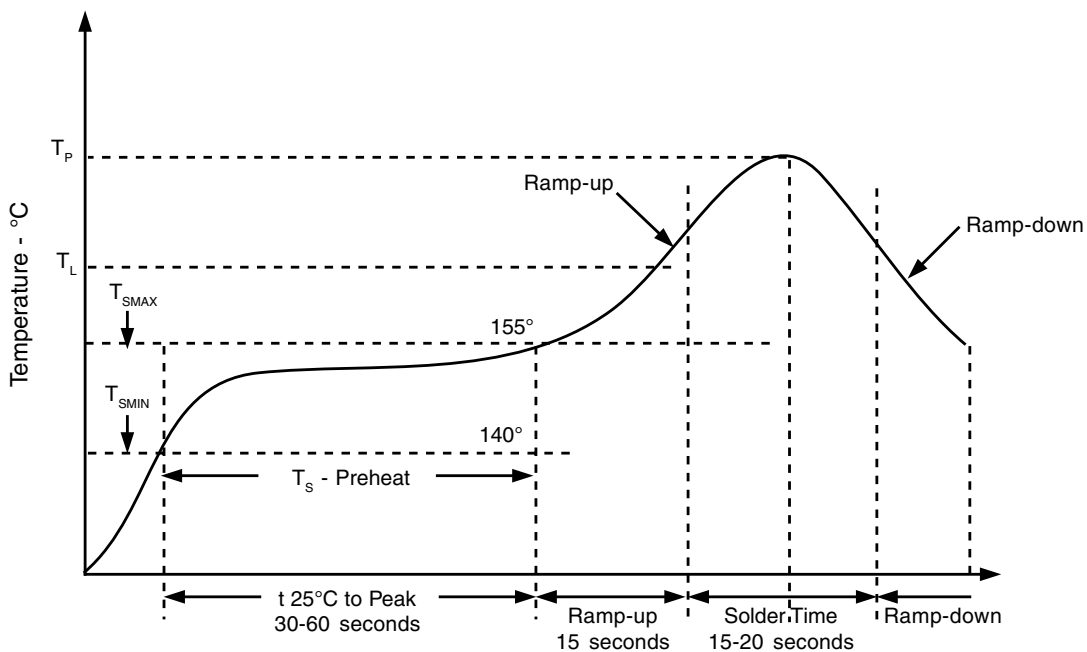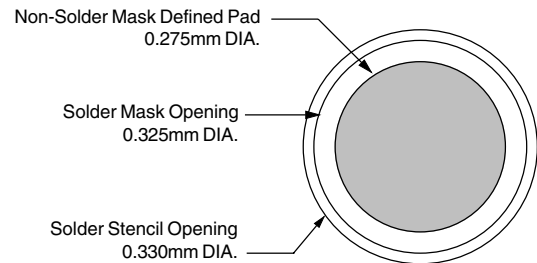


U0404FC3.3C thru U0404FC36C

PACKAGE OUTLINE & DIMENSIONS

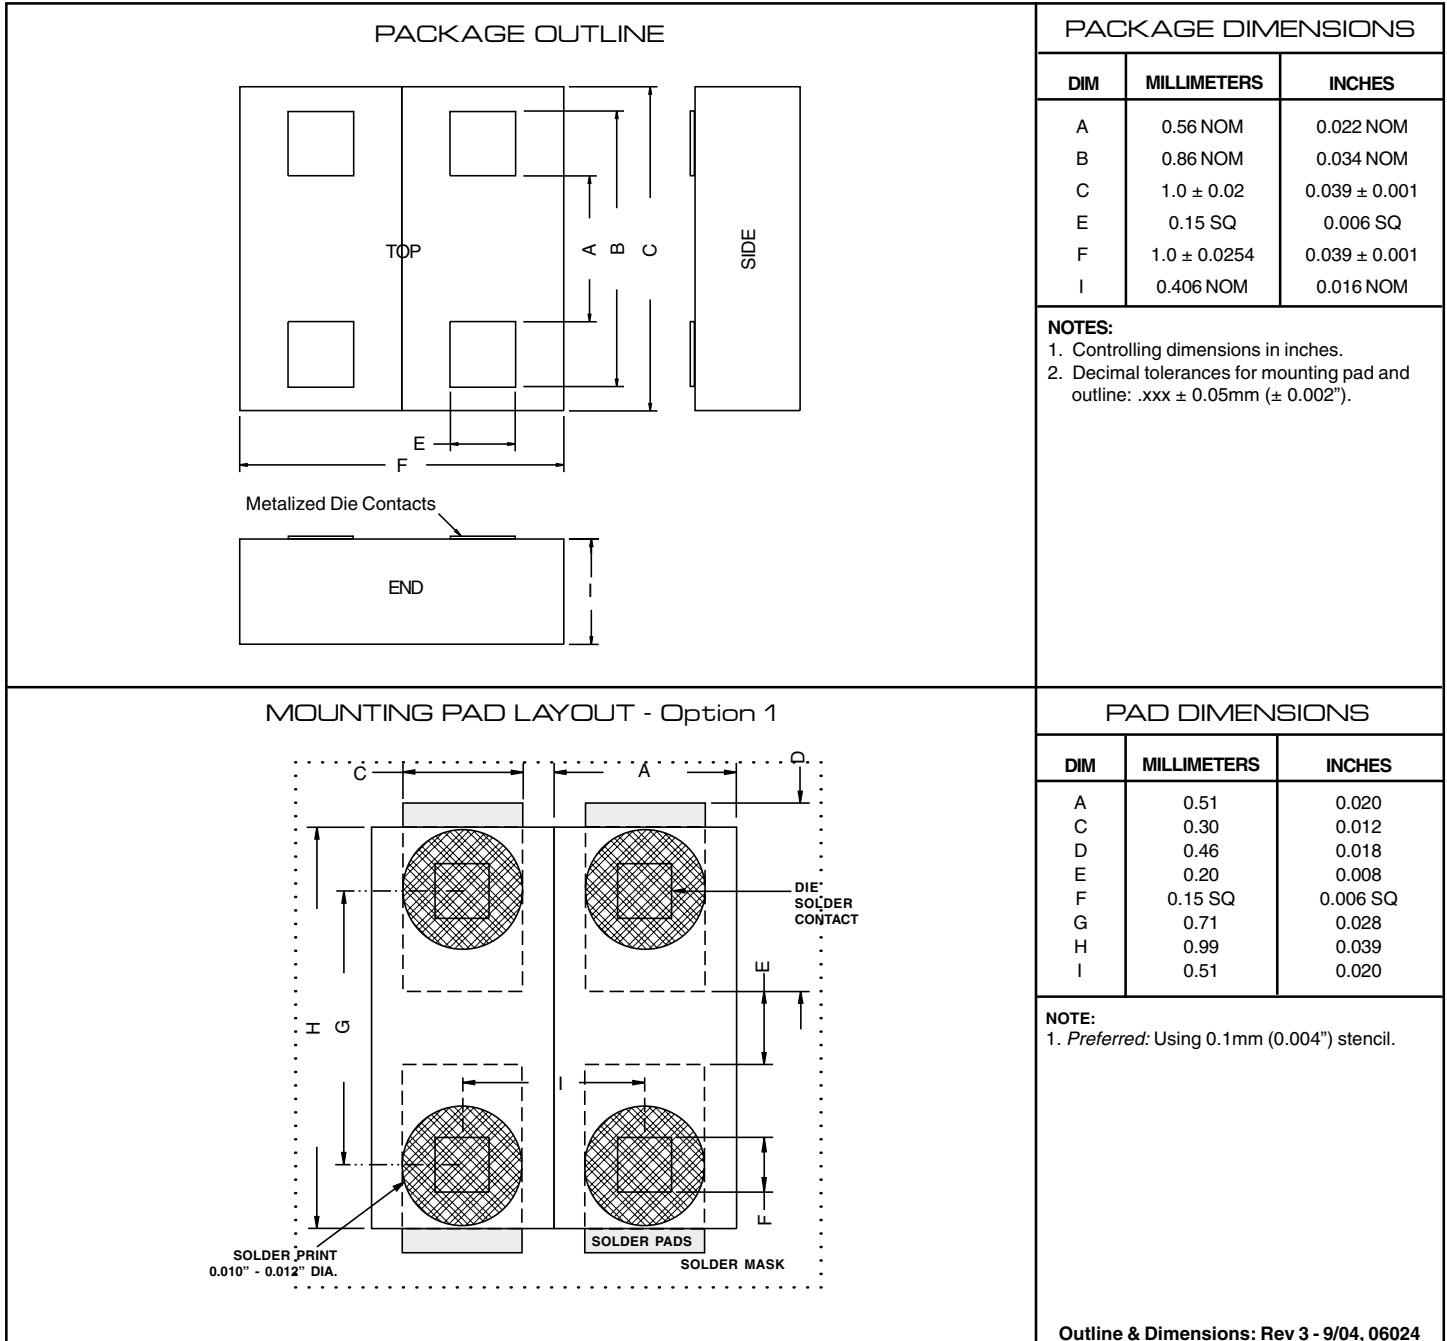

PACKAGE OUTLINE & DIMENSIONS

MOUNTING PAD LAYOUT - Option 2

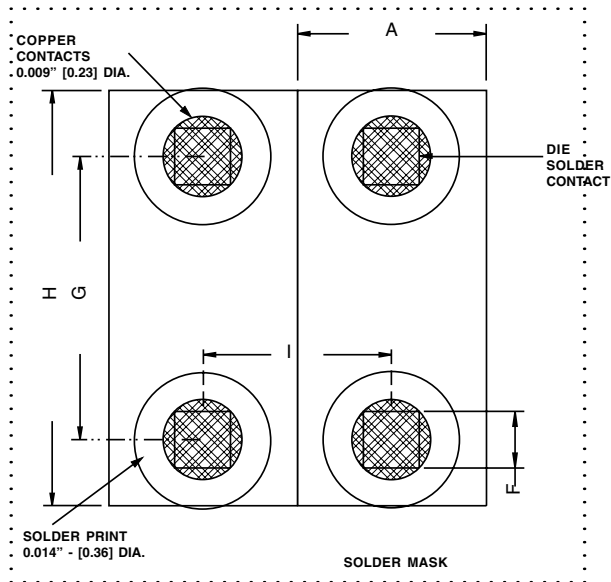

PACKAGE DIMENSIONS


| DIM | MILLIMETERS | INCHES |
|-----|-------------|----------|
| A | 0.51 | 0.020 |
| F | 0.15 SQ | 0.006 SQ |
| G | 0.71 | 0.028 |
| H | 0.99 | 0.039 |
| I | 0.51 | 0.020 |

NOTES:

1. Controlling dimensions in inches.
2. Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002").
3. Preferred: Using 0.1mm (0.004") stencil.

Outline & Dimensions: Rev 3 - 9/04, 06024

TAPE & REEL ORIENTATION



NOTE:

1. Top view of tape. Solder bumps are face down in tape package.

TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA 481.
2. 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., U0404FC05C-T75-1).
3. 8mm Paper Tape: 7 Inch Reels - 10,000 pieces per reel. Ordering Suffix: -T710-2 (i.e., U0404FC05C-T710-2).

COPYRIGHT © ProTek Devices 2005

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com