


RECTIFIERS

High Efficiency, 50A

UES804
UES805
UES806
UES804HR2
UES805HR2
UES806HR2

FEATURES

- Very Low Forward Voltage (1.15V)
- Very Fast Recovery Times (50nSec)
- High Surge Capability
- Low Thermal Resistance
- Mechanically Rugged
- Both Polarities Available



DESCRIPTION

The UES804 is specifically designed for operation in power switching circuits operating at frequencies of at least 20 KHz.

ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage, UES804, UES804HR2	200V
Peak Inverse Voltage, UES805, UES805HR2	300V
Peak Inverse Voltage, UES806, UES806HR2	400V
Maximum Average D.C. Output Current @ $T_C = 100^\circ\text{C}$	50A
Surge Current, 8.3ms	600A
Thermal Resistance, Junction to Case	.8°C/W
Operating and Storage Temperature Range	-55°C to +150°C

POWER CYCLING


These devices possess the unique ability to pass many thousands of cycles of a stress test designed to evaluate the integrity of the bonding systems used in the construction of power rectifiers.

In this stress test, the case of the device is not heat sunk. Full rated forward current is supplied to force a case temperature increase at least 75°C, at which time, the current is removed and the case allowed to cool. The cycle is repeated a minimum of 5,000 times to simulate equipment being turned on and off. Extended power cycling tests demonstrate a product capability in excess of 25,000 cycles.

SWITCHING CHARACTERISTICS

The switching times of these ultra-fast rectifiers increase relatively little, with temperature or at different currents. Even in severe applications, such as catch diodes for switching regulators and output rectifiers for high frequency square wave inverters, these devices switch many times faster than the fastest associated transistors. Thus, the stresses on and powers dissipated in the switching transistors are substantially less than when using other rectifiers.

MECHANICAL SPECIFICATIONS

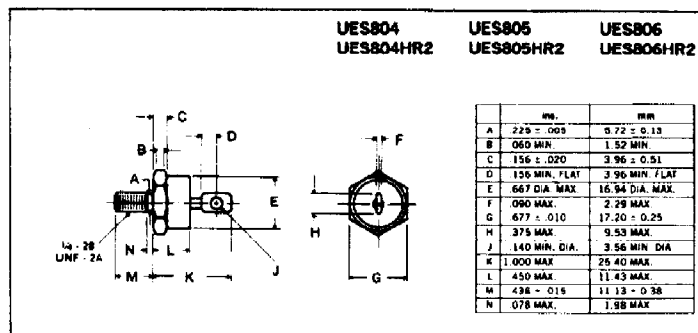

DO-5



Notes:

1. Standard polarity is cathode-to-stud.
For reverse polarity (anode-to-stud) add suffix "R", i.e. UES804R.
2. All metal surfaces tin plated.
3. Maximum unlubricated stud torque: 30 inch pounds.
4. Angular orientation of terminal is undefined.



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

UES804 UES805 UES806
UES804HR2 UES805HR2 UES806HR2

ELECTRICAL SPECIFICATIONS

Type	PIV	Maximum Forward Voltage		Maximum Reverse Current		Maximum Reverse Recovery Time*
		$T_c = 25^\circ\text{C}$	$T_c = 125^\circ\text{C}$	$T_c = 25^\circ\text{C}$	$T_c = 125^\circ\text{C}$	
UES804/804HR2	200V	1.25V	1.15V	$70\mu\text{A}$	30mA	50nS
UES805/805HR2	300V	@ $I_F = 50\text{A}$	@ $I_F = 50\text{A}$			
UES806/806HR2	400V	$t_p = 300\mu\text{S}$	$t_p = 300\mu\text{S}$			

* Measured in circuit $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{RRC} = 0.25\text{A}$

