



UF1A THRU UF1M SURFACE MOUNT ULTRA FAST SWITCHING RECTIFIER

TECHNICAL
SPECIFICATION

VOLTAGE: 50 TO 1000V CURRENT: 1.0A


FEATURES

- Ideal for surface mount pick and place application
- Low profile package
- Built-in strain relief
- High surge capability
- Open junction chip, silastic passivated
- Ultra fast recovery for high efficiency
- High temperature soldering guaranteed: 260°C/10sec/at terminal

MECHANICAL DATA

- Terminal: Plated leads solderable per MIL-STD 202E, method 208C
- Case: Molded with UL-94 Class V-O recognized flame retardant epoxy
- Polarity: Color band denotes cathode

DSMA/DO-214AC

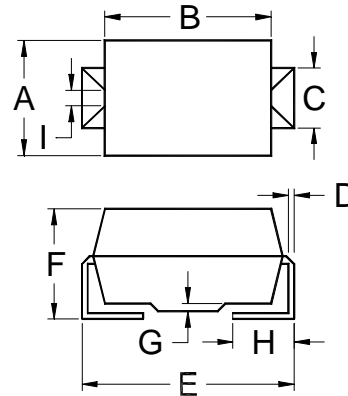

	A	B	C	D	
MAX.	.110(2.79)	.177(4.50)	.075(1.90)	.012(0.305)	
MIN.	.100(2.54)	.157(3.99)	.052(1.32)	.006(0.152)	
	E	F	G	H	I
MAX.	.208(5.28)	.090(2.29)	.008(0.203)	.060(1.52)	.035(0.88)
MIN.	.194(4.93)	.078(1.98)	.004(0.102)	.030(0.76)	.027(0.68)

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60Hz, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

RATINGS	SYMBOL	UF 1A	UF 1B	UF 1D	UF 1G	UF 1J	UF 1K	UF 1M	UNITS	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current ($T_L=100^\circ\text{C}$)	$I_{F(AV)}$	1.0							A	
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load)	I_{FSM}	30							A	
Maximum Instantaneous Forward Voltage (at rated forward current)	V_F	1.0		1.4		1.7			V	
Maximum DC Reverse Current ($T_a=25^\circ\text{C}$)	I_R	5.0							μA	
(at rated DC blocking voltage) ($T_a=100^\circ\text{C}$)		200							μA	
Maximum Reverse Recovery Time (Note 1)	t_{rr}	50				75				nS
Typical Junction Capacitance (Note 2)	C_J	20				10				pF
Typical Thermal Resistance (Note 3)	$R_{\theta(ja)}$	32							$^\circ\text{C/W}$	
Storage and Operation Junction Temperature	T_{STG}, T_J	-50 to +150							$^\circ\text{C}$	

Note:

1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.
2. Measured at 1.0 MHz and applied voltage of 4.0V_{dc}
3. Thermal resistance from junction to terminal mounted on 5x5mm copper pad area