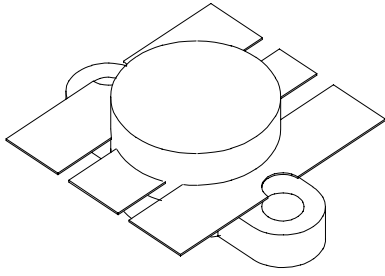


UMIL 80

80 Watts, 28 Volts, Class AB
Defcom 200 - 500 MHz

<p>GENERAL DESCRIPTION</p> <p>The UMIL80 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 200-500 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.</p>	<p>CASE OUTLINE 55HV, Style 2</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 220 Watts</p> <p>Maximum Voltage and Current</p> <p>BVces Collector to Emitter Voltage 65 Volts BVebo Emitter to Base Voltage 4.0 Volts Ic Collector Current 12 A</p> <p>Maximum Temperatures</p> <p>Storage Temperature - 65 to +150°C Operating Junction Temperature +200°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	80			Watts
Pin	Power Input	Vcc = 28 Volts			10	Watts
Pg	Power Gain		9.0	9.5		dB
η_c	Efficiency		55			%
VSWR	Load Mismatch Tolerance				5:1	

BVebo	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 20 mA	60			Volts
BVceo	Collector to Emitter Breakdown	Ie = 20 mA	31			Volts
BVcbo	Collector to Base Breakdown	Ic = 20 mA	60			Volts
Cob	Output Capacitance	Vcb=28 V, F= 1 MHz		80		pF
h_{FE}	DC - Current Gain	Vce = 5 V, Ic = 1 A	10			
θ_{jc}	Thermal Resistance				0.8	°C/W


Issue October 1998 : Correct Case from Hu to HV

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120


POWER OUTPUT vs POWER INPUT

$V_{cc}=28V$ $f=400MHz$

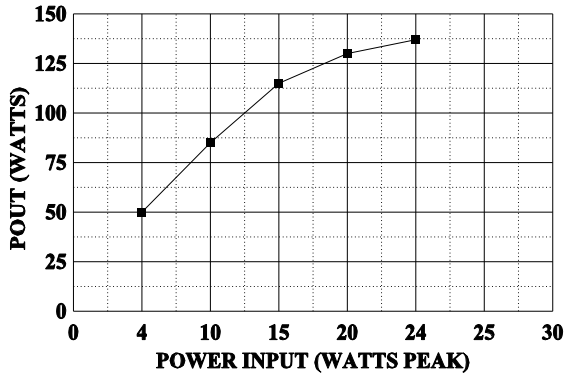

fT vs Ic

$V_{cc}=5V$, $T_c=25C$

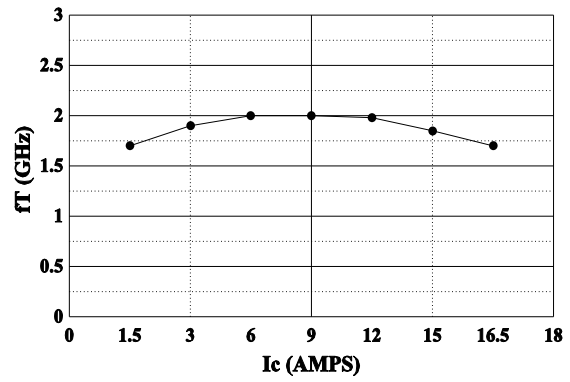

DC SAFE OPERATING AREA

