

US1XF SERIES

SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

产

品

规

格

确

认

书

US1AF THRU US1MF



康比電子
HORNBY ELECTRONIC

SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Easy pick and place
- Built-in strain relief
- Ultrafast recovery times for high efficiency
- High temperature soldering : 250°C /10 seconds at terminals


MECHANICAL DATA

Case: Molded plastic, SMAF

Terminals: Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

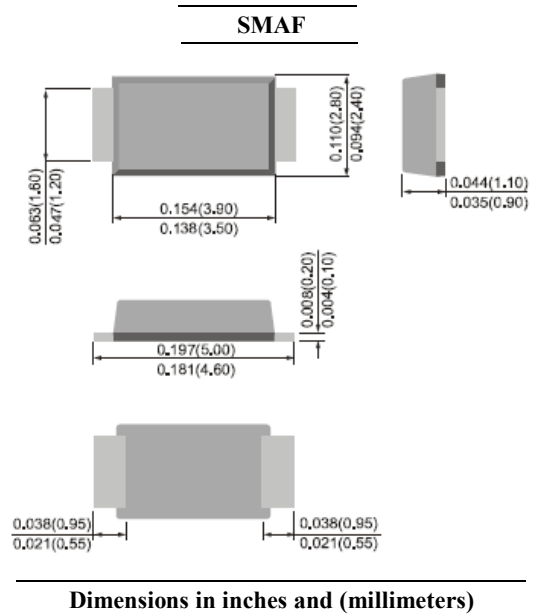

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	US1AF	US1BF	US1DF	US1GF	US1JF	US1KF	US1MF	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current See Fig.1	$I_{(AV)}$	1.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							Amp
Maximum Forward Voltage at 1.0A	V_F	1.0		1.3		1.7			Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=125^\circ\text{C}$	I_R	5.0			100				μAmp
Typical Junction Capacitance (Note 1)	C_J	17							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	80							$^\circ\text{C/W}$
Maximum Reverse Recovery Time (Note 3)	T_{RR}	50				75			nS
Operating Junction Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150							$^\circ\text{C}$

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal resistance from junction to ambient mounted on P.C.B. with 5.0 x 5.0mm copper pad areas

3- Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{RR}=0.25\text{A}$.

US1AF THRU US1MF

SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

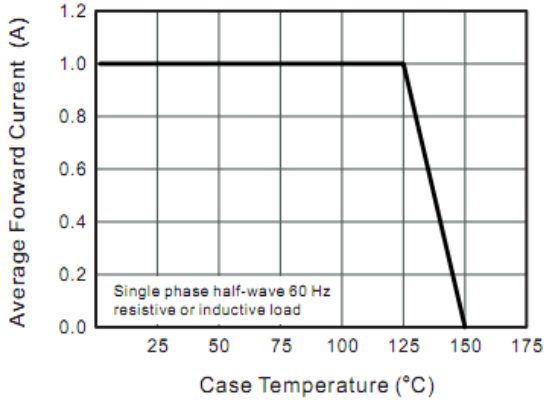


Fig.2 Typical Reverse Characteristics

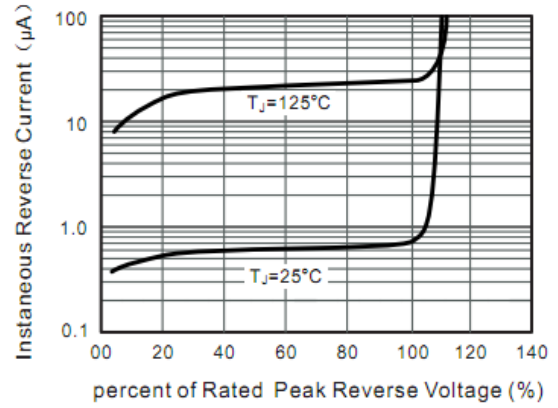


Fig.3 Typical Forward Characteristics

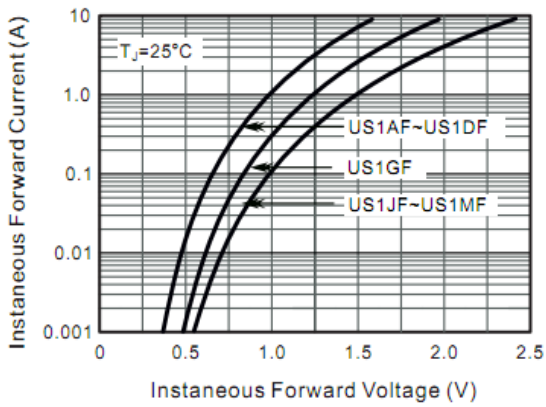


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

