



US3A THRU US3M

SURFACE MOUNT ULTRA FAST RECTIFIER


Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Ultra fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body
Terminals: DO-214AB solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.20 grams

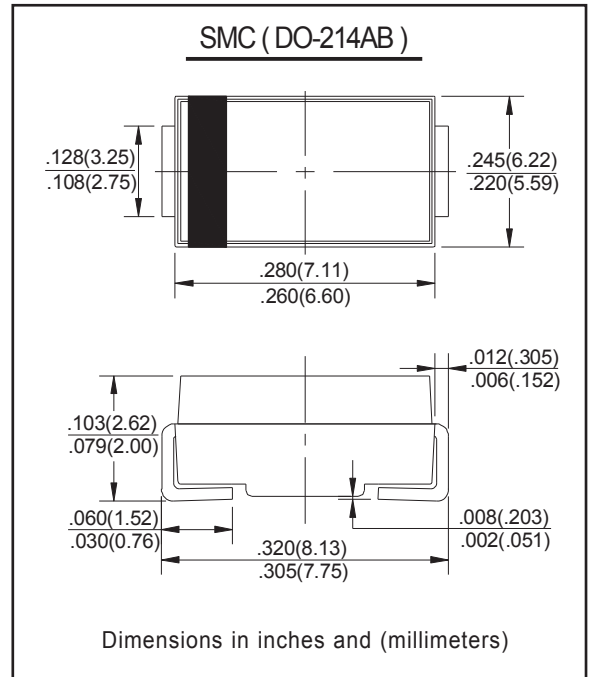

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic	SYMBOLS	US3A	US3B	US3D	US3G	US3J	US3K	US3M	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0							A
Maximum instantaneous forward voltage at 3.0A	V_F	1.0			1.30	1.70			V
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R				5.0 250.0				μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50			75				ns
Typical junction capacitance (NOTE 2)	C_J				75				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JL}$				15.0				$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150							$^\circ\text{C}$

- Note:** 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3. Thermal resistance from junction to lead and from junction to ambient with P.C.B mounted on 0.3 x 0.3" (8.0 x 8.0 mm) Copper pad area



US3A THRU US3M

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 – Maximum Forward Current Derating Curve

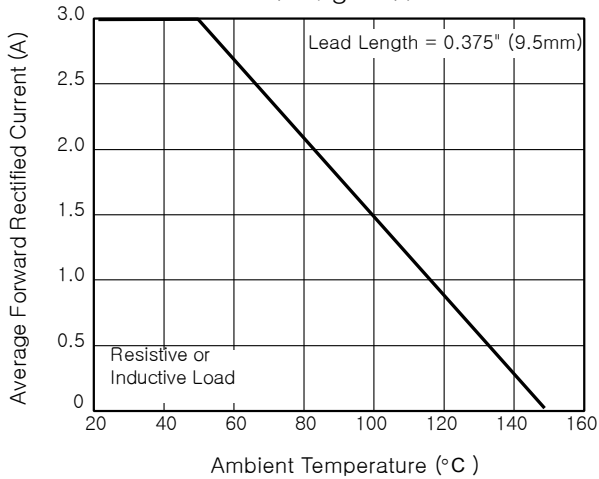


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

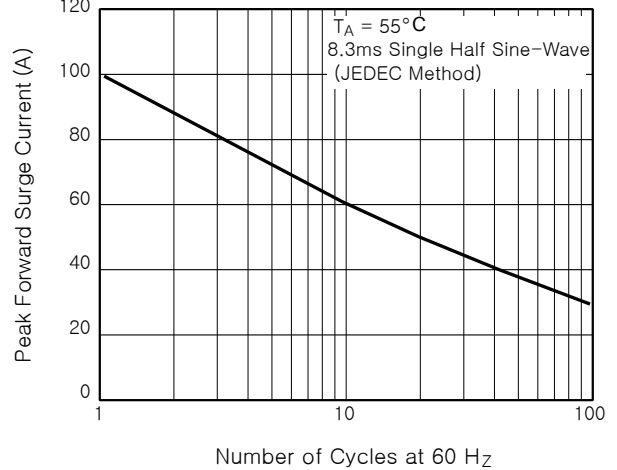


Fig. 3 – Typical Instantaneous Forward Characteristics

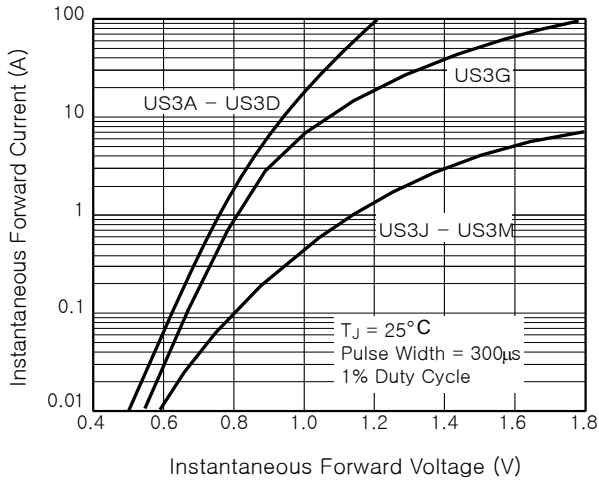


Fig. 4 – Typical Reverse Leakage Characteristics

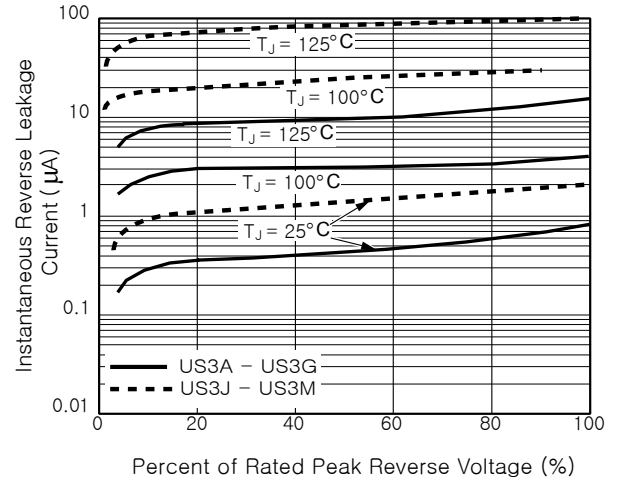


Fig. 5 – Typical Junction Capacitance

