

Film Capacitors

High Frequency, Wrap-and-Fill, Metallized Polypropylene


FEATURES

- Excellent AC performance
- Low Power dissipation
- Low dielectric absorption
- Close tolerance
- High stability


RoHS
COMPLIANT

PERFORMANCE CHARACTERISTICS
Operating Temperature: - 55 °C to + 85 °C

Voltage derating:

At + 105 °C, 50 % of + 85 °C rating

ESR: 20 kHz to 100 kHz

Capacitance Range: 0.022 μ F to 10.0 μ F

Capacitance Tolerance: \pm 20 %, \pm 10 %, \pm 5 %

DC Voltage Rating: 100 WVDC to 630 WVDC

AC Voltage Rating: 70 Vrms to 275 Vrms, 60 Hz to 400 Hz

Dissipation Factor: 0.1 % maximum
Measure all units at 1000 Hz at + 25 °C

DC Voltage Test: 200 % of rated voltage for 2 minutes

AC Voltage Test: 130 % of rated rms voltage at 60 Hz for 15 seconds

Insulation Resistance: Measured at 100 WVDC after a 2 minute charge.

 At + 25 °C: 200 000 Megohm - Microfarads
or 400 000 Megohm minimum.

 At + 85 °C: 10 000 Megohm - Microfarads
or 20 000 Megohm minimum.

 At + 105 °C: 1000 Megohm - Microfarads
or 2000 Megohm minimum.

Vibration Test (Condition B): No mechanical damage, short, open or intermittent circuits.

DC Life Test: 150 % of rated voltage for 1000 hours at + 85 °C. No open or short circuits. No visible damage.

 Maximum Δ CAP \pm 1.0 %

Minimum IR = 50 % of initial limit

Maximum DF = 0.12 %

Humidity Test: 95 % relative humidity at + 40 °C for 250 hours. No visible damage.

 Maximum Δ CAP \pm 1.0 %

Minimum IR = 20 % of initial limit

Maximum DF = 0.12 %

AC Life Test: 110 % of rated rms voltage at 60 Hz for 1000 hours at + 85 °C.

 Maximum Δ CAP \pm 5 %

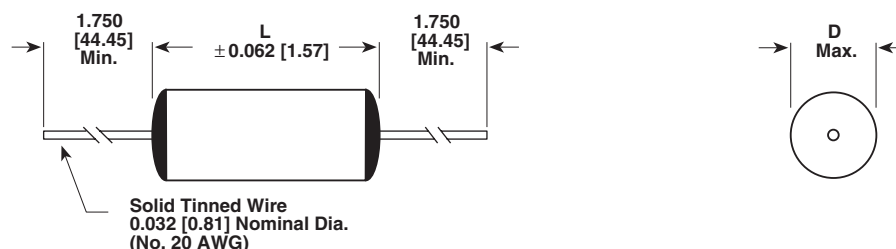
Minimum IR = 50 % of initial limit

Maximum DF = 0.12 %

PHYSICAL CHARACTERISTICS
Lead Pull: 5 pounds (2.3 kilograms) for one minute. No physical damage.

Lead Bend: After three complete consecutive bends. No damage.

Marking: Sprague® trademark, type or part number, capacitance and voltage.

DIMENSIONS in inches [millimeters]


* Leads to be within 0.062" [1.57 mm] of center line at egress but not less than 0.031" [0.79 mm] from edge.

Type V-730P

Vishay Sprague



Film Capacitors
High Frequency, Wrap-and-Fill,
Metallized Polypropylene

STANDARD RATINGS in inches [millimeters]											
CAPACITANCE (μF)	PART NUMBER**	CASE SIZE		ESR (Milliohms) 20 kHz - 100 kHz	MAXIMUM RIPPLE CURRENT (Amps rms) at 20 kHz Case Temperature*** at						
		D	L		+25 °C	+35 °C	+45 °C	+55 °C	+65 °C	+75 °C	+85 °C
					100 WVDC						
0.22	V-730P224X9100	0.275 [7.0]	0.75 [19.0]	-	2.3	2.3	2.3	2.3	2.3	1.8	1.0
0.27	V-730P274X9100	0.298 [7.6]	0.75 [19.0]	-	2.6	2.6	2.6	2.6	2.4	1.9	1.1
0.33	V-730P334X9100	0.324 [8.2]	0.75 [19.0]	-	2.8	2.8	2.8	2.8	2.6	2.2	1.2
0.39	V-730P394X9100	0.347 [8.8]	0.75 [19.0]	-	3.1	3.1	3.1	3.1	2.9	2.3	1.3
0.47	V-730P474X9100	0.376 [9.6]	0.75 [19.0]	37.0	3.7	3.4	3.1	2.8	2.5	2.0	1.4
0.56	V-730P564X9100	0.321 [8.2]	1.00 [25.4]	35.0	3.9	3.6	3.3	2.9	2.6	2.1	1.5
0.68	V-730P684X9100	0.348 [8.8]	1.00 [25.4]	33.0	4.1	3.8	3.5	3.1	2.8	2.2	1.6
0.82	V-730P824X9100	0.377 [9.6]	1.00 [25.4]	31.0	4.3	4.0	3.6	3.2	2.9	2.3	1.7
1.0	V-730P105X9100	0.421 [10.7]	1.00 [25.4]	26.0	5.5	5.1	4.7	4.2	3.6	2.8	2.6
1.2	V-730P125X9100	0.454 [11.5]	1.00 [25.4]	24.0	5.7	5.3	4.9	4.4	3.8	3.0	2.8
1.5	V-730P155X9100	0.500 [12.7]	1.00 [25.4]	20.0	6.1	5.5	5.1	4.6	4.0	3.2	3.1
1.8	V-730P185X9100	0.541 [13.7]	1.00 [25.4]	19.0	6.3	5.7	5.3	4.8	4.1	3.4	3.0
2.0	V-730P205X9100	0.486 [12.3]	1.25 [31.8]	18.0	6.5	6.0	5.5	4.9	4.2	3.5	3.2
2.2	V-730P225X9100	0.507 [12.9]	1.25 [31.8]	18.0	6.8	6.3	5.7	5.1	4.4	3.6	3.3
2.7	V-730P275X9100	0.554 [14.1]	1.25 [31.8]	17.0	7.1	6.5	6.0	5.3	4.6	3.7	3.4
3.0	V-730P305X9100	0.581 [14.8]	1.25 [31.8]	16.0	7.3	6.7	6.2	5.5	4.8	3.9	3.5
3.3	V-730P335X9100	0.606 [15.4]	1.25 [31.8]	16.0	7.4	6.8	6.4	5.6	4.9	4.0	3.6
3.9	V-730P395X9100	0.654 [16.6]	1.25 [31.8]	15.0	7.6	6.9	6.6	5.8	5.1	4.1	3.7
4.0	V-730P405X9100	0.537 [13.6]	1.75 [44.5]	15.0	7.8	7.0	6.7	5.9	5.2	4.2	3.8
4.7	V-730P475X9100	0.577 [14.7]	1.75 [44.5]	15.0	8.1	7.4	6.8	6.0	5.3	4.3	3.9
5.0	V-730P505X9100	0.593 [15.1]	1.75 [44.5]	14.0	8.3	7.6	7.0	6.2	5.4	4.4	4.0
5.6	V-730P565X9100	0.624 [15.8]	1.75 [44.5]	14.0	8.4	7.7	7.1	6.4	5.5	4.5	4.1
6.0	V-730P605X9100	0.644 [16.4]	1.75 [44.5]	14.0	8.5	7.8	7.2	6.5	5.6	4.6	4.2
6.8	V-730P685X9100	0.682 [17.3]	1.75 [44.5]	13.0	8.5	8.0	7.4	6.7	5.7	4.7	4.3
8.0	V-730P805X9100	0.735 [18.7]	1.75 [44.5]	13.0	8.6	8.3	7.7	6.8	6.0	4.8	4.4
8.2	V-730P825X9100	0.743 [18.9]	1.75 [44.5]	13.0	8.8	8.6	8.0	7.0	6.1	4.9	4.5
10.0	V-730P106X9100	0.815 [20.7]	1.75 [44.5]	12.0	9.0	9.0	8.5	7.6	6.6	5.4	4.9
250 WVDC											
0.1	V-730P104X9250	0.279 [7.1]	0.75 [19.0]	-	1.5	1.5	1.5	1.5	1.5	1.5	0.9
0.12	V-730P124X9250	0.300 [7.6]	0.75 [19.0]	-	1.9	1.9	1.9	1.9	1.9	1.7	1.1
0.15	V-730P154X9250	0.327 [8.3]	0.75 [19.0]	-	2.3	2.3	2.3	2.3	2.3	1.9	1.1
0.18	V-730P184X9250	0.353 [9.0]	0.75 [19.0]	-	2.7	2.7	2.7	2.7	2.5	2.0	1.2
0.22	V-730P224X9250	0.306 [7.8]	1.00 [25.4]	-	1.9	1.9	1.9	1.9	1.9	1.9	1.3
0.27	V-730P274X9250	0.333 [8.5]	1.00 [25.4]	-	2.4	2.4	2.4	2.4	2.4	2.2	1.4
0.33	V-730P334X9250	0.362 [9.2]	1.00 [25.4]	-	2.9	2.9	2.9	2.9	2.9	2.3	1.5
0.39	V-730P394X9250	0.389 [9.9]	1.00 [25.4]	-	3.4	3.4	3.4	3.2	2.9	2.3	1.6
0.47	V-730P474X9250	0.422 [10.7]	1.00 [25.4]	35.0	3.8	3.7	3.6	3.4	2.9	2.4	1.7
0.56	V-730P564X9250	0.464 [11.8]	1.00 [25.4]	33.0	3.9	3.8	3.7	3.5	3.1	2.5	1.8
0.68	V-730P684X9250	0.425 [10.8]	1.25 [31.8]	32.0	4.0	3.9	3.8	3.7	3.2	2.6	1.9
0.82	V-730P824X9250	0.471 [12.0]	1.25 [31.8]	31.0	4.2	4.1	4.0	3.9	3.4	2.8	2.0
1.0	V-730P105X9250	0.513 [13.0]	1.25 [31.8]	28.0	4.4	4.4	4.4	4.4	4.3	3.5	3.2
1.2	V-730P125X9250	0.554 [14.1]	1.25 [31.8]	27.0	4.7	4.6	4.5	5.0	4.5	3.7	3.3
1.5	V-730P155X9250	0.613 [15.6]	1.25 [31.8]	26.0	5.1	5.0	4.9	5.4	4.7	3.9	3.5
1.8	V-730P185X9250	0.667 [17.0]	1.25 [31.8]	25.0	5.9	5.8	5.7	5.7	5.0	4.1	3.7
2.0	V-730P205X9250	0.700 [17.8]	1.25 [31.8]	21.0	7.2	7.2	6.8	6.0	5.2	4.3	3.9
2.2	V-730P225X9250	0.610 [15.5]	1.75 [44.5]	20.0	8.4	7.5	7.0	6.3	5.4	4.5	4.1
2.7	V-730P275X9250	0.669 [17.0]	1.75 [44.5]	19.0	8.6	7.8	7.3	6.6	5.7	4.7	4.3
3.0	V-730P305X9250	0.703 [17.9]	1.75 [44.5]	18.0	9.0	8.3	7.6	6.8	5.9	4.8	4.4
3.3	V-730P335X9250	0.734 [18.6]	1.75 [44.5]	18.0	9.0	8.4	7.8	7.0	6.0	4.9	4.5
3.9	V-730P395X9250	0.794 [20.2]	1.75 [44.5]	17.0	9.0	8.5	8.0	7.2	6.2	5.0	4.6
4.0	V-730P405X9250	0.803 [20.4]	1.75 [44.5]	16.0	9.0	8.6	8.2	7.4	6.3	5.1	4.7
4.7	V-730P475X9250	0.866 [22.0]	1.75 [44.5]	16.0	9.0	8.8	8.5	7.7	6.6	5.3	4.9
5.0	V-730P505X9250	0.892 [22.7]	1.75 [44.5]	15.0	9.0	9.0	8.8	7.9	6.8	5.6	5.1
5.6	V-730P565X9250	0.941 [23.9]	1.75 [44.5]	15.0	9.0	9.0	8.9	8.0	7.0	5.8	5.3
6.0	V-730P605X9250	0.972 [24.7]	1.75 [44.5]	15.0	9.0	9.0	9.0	8.2	7.2	5.9	5.5
6.8	V-730P685X9250	0.882 [22.4]	2.25 [57.2]	15.0	9.0	9.0	9.0	8.4	7.4	6.0	5.6
8.0	V-730P805X9250	0.953 [24.2]	2.25 [57.2]	14.0	9.0	9.0	9.0	8.7	7.8	6.3	5.8
8.2	V-730P825X9250	0.964 [24.5]	2.25 [57.2]	14.0	9.0	9.0	9.0	8.8	7.9	6.4	5.9
10.0	V-730P106X9250	1.060 [26.9]	2.25 [57.2]	13.0	9.0	9.0	9.0	8.9	8.3	6.8	6.2

Note:

Other capacitance values and voltage ratings are available upon request

** Part Numbers listed are for a capacitance tolerance of $\pm 10\%$. To specify $\pm 20\%$ tolerance, change the "X9" in the Part Number to "X0"; for $\pm 5\%$, from "X9" to "X5".

*** The peak current pulse capability of these capacitors is 10 amperes/ μF . The maximum rate voltage change is 10 V/ μs .



Film Capacitors
High Frequency, Wrap-and-Fill,
Metallized Polypropylene

Vishay Sprague

Table with columns: CAPACITANCE (µF), PART NUMBER**, CASE SIZE (D, L), ESR (Milliohms) at 20 kHz and 100 kHz, and MAXIMUM RIPPLE CURRENT (Amps rms) at 20 kHz for various case temperatures (+25 °C to +85 °C). Rows are grouped by WVDC (400 and 630).

Note:

Other capacitance values and voltage ratings are available on request

** Part Numbers listed are for a capacitance tolerance of ± 10 %. To specify ± 20 % tolerance, change the "X9" in the Part Number to "X0"; for ± 5 %, from "X9" to "X5".

*** The peak current pulse capability of these capacitors is 10 amperes/µF. The maximum rate voltage change is 10 V/µS.

ORDERING INFORMATION table with columns for V-730P TYPE, CAPACITANCE (224), CAPACITANCE TOLERANCE (X9), and DC VOLTAGE RATING* (100). Includes explanatory text for capacitance and voltage, and a table for WVDC RATED rms VOLTS at different frequencies.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.