



# Thyristor/Diode Modules

ECO-PAC

$I_{TRMS} = 2 \times 180A$   
 $I_{TAVM} = 2 \times 105A$   
 $V_{RRM} = 800 - 1800 V$

## Preliminary Data

$V_{RSM}$ $V_{DSM}$ V	$V_{RRM}$ $V_{DRM}$ V	Typ
900	800	VCD 105 - 08io7
1300	1200	VCD 105 - 12io7
1500	1400	VCD 105 - 14io7
1700	1600	VCD 105 - 16io7
1900	1800	VCD 105 - 18io7

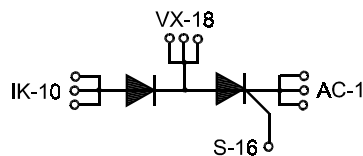

Symbol	Conditions	Maximum Ratings		
$I_{TRMS}$		180	A	
$I_{TAVM}$	$T_C = 85^\circ C$ ; 180° sine	105	A	
$I_{TSM}$	$T_{VJ} = 45^\circ C$ ; $V_R = 0 V$ ; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	2250	A	
		2400	A	
$I^2dt$	$T_{VJ} = 45^\circ C$ ; $V_R = 0 V$ ; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine	25300	A <sup>2</sup> s	
		23900	A <sup>2</sup> s	
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ C$ ; $f = 50 \text{ Hz}$ ; $t_p = 200 \mu s$ ; $V_D = \frac{2}{3} V_{DRM}$ ; $I_G = 0.45 \text{ A}$ $di_G/dt = 0.45 \text{ A}/\mu s$ ;	repetitive, $I_T = 250 \text{ A}$	150	A/ $\mu s$
		non repetitive, $I_T = I_{TAVM}$	500	A/ $\mu s$
$(dv/dt)_{cr}$	$T_{VJ} = 125^\circ C$ ; $V_{DR} = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$ , method 1 (linear voltage rise)		1000	V/ $\mu s$
$P_{GM}$	$T_{VJ} = 125^\circ C$ ; $I_T = I_{TAVM}$ ;	$t_p = 30 \text{ ms}$	$\leq 10$	W
		$t_p = 300 \text{ ms}$	$\leq 5$	W
$P_{GAVM}$			0.5	W
$V_{RGM}$			10	V
$T_{VJ}$		-40 ... + 125		°C
$T_{VJM}$		125		°C
$T_{stg}$		-40 ... + 125		°C
$V_{ISOL}$	50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ min}$	3000	V ~
		$t = 1 \text{ s}$	3600	V ~
$M_d$	Mounting torque (M4)		1.5 - 2.0	Nm
			14 - 18	lb.in.
<b>Weight</b>	typ.		26	g

### Features

- Isolation voltage 3600 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering

### Applications

- DC motor control
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

### Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling
- High power density
- Small and light weight

Data according to IEC 60747 refer to a single thyristor unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

