



DATA SHEET

SEMICONDUCTOR

ZS47xxA

1000mW Surface Mount Zener Diodes - 3.3V-100V





Features

- Batch process design, excellent power dissipation offers better reverse leakage current and thermal resistance.
- Standard zener voltage tolerance $\pm 5\%$.
- Low inductance.
- Low profile package.
- Built-in strain relief.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228
- Suffix "-H" indicates Halogen free parts, ex. ZS4728A-H.

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, JEDEC DO-214AC / SMA
- Terminals :Plated terminals, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.05 gram

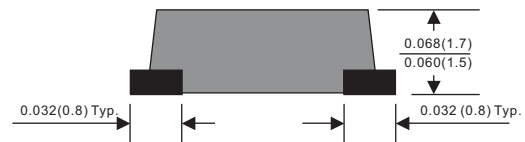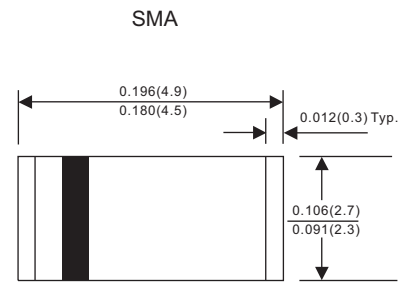

Dimensions in inches and (millimeters)

Maximum ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward voltage	$I_F = 200 \text{ mA}$	V_F			1.20	V
Power Dissipation	at $T_L=75^\circ\text{C}$	P_D			1000	mW
Thermal resistance	Junction to case(Note 1) Junction to ambient(Note 1)	$R_{\theta JC}$ $R_{\theta JA}$		30 50		$^\circ\text{C/W}$
Operating temperature		T_J	-55		+150	$^\circ\text{C}$
Storage temperature		T_{STG}	-65		+175	$^\circ\text{C}$

Note : 1. Mounted on 0.2"x0.2"(5x5mm)FR-4 PCB

ELECTRICAL CHARACTERISTICS

ZS47xxA

Electrical characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Part No.	Marking code	Zener voltage			Test current	Zener impedance			Leakage current		Maximum Surge current
		$V_Z @ I_{ZT}$ (Volts)				I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	I_R	
		Min.	Nom.	Max.	mA	(Ω)Max	(Ω)Max	mA	(μA)Max	Volts	mApk
ZS4728A	Z3V3	3.14	3.3	3.47	76	10	400	1.00	100	1.0	1380
ZS4729A	Z3V6	3.42	3.6	3.78	69	10	400	1.00	100	1.0	1260
ZS4730A	Z3V9	3.71	3.9	4.10	64	9	400	1.00	50	1.0	1190
ZS4731A	Z4V3	4.09	4.3	4.52	58	9	400	1.00	10	1.0	1070
ZS4732A	Z4V7	4.47	4.7	4.94	53	8	500	1.00	10	1.0	970
ZS4733A	Z5V1	4.85	5.1	5.36	49	7	550	1.00	10	1.0	890
ZS4734A	Z5V6	5.32	5.6	5.88	45	5	600	1.00	10	2.0	810
ZS4735A	Z6V2	5.89	6.2	6.51	41	2	700	1.00	10	3.0	730
ZS4736A	Z6V8	6.46	6.8	7.14	37	3.5	700	1.00	10	4.0	660
ZS4737A	Z7V5	7.13	7.5	7.88	34	4.0	700	0.50	10	5.0	605
ZS4738A	Z8V2	7.79	8.2	8.61	31	4.5	700	0.50	10	6.0	550
ZS4739A	Z9V1	8.65	9.1	9.56	28	5	700	0.50	10	7.0	500
ZS4740A	Z10	9.50	10	10.50	25	7	700	0.25	10	7.6	454
ZS4741A	Z11	10.45	11	11.55	23	8	700	0.25	5	8.4	414
ZS4742A	Z12	11.40	12	12.60	21	9	700	0.25	5	9.1	380
ZS4743A	Z13	12.35	13	13.65	19	10	700	0.25	5	9.9	344
ZS4744A	Z15	14.25	15	15.75	17	14	700	0.25	5	11.4	304
ZS4745A	Z16	15.20	16	16.80	15.5	16	700	0.25	5	12.2	285
ZS4746A	Z18	17.10	18	18.90	14	20	750	0.25	5	13.7	250
ZS4747A	Z20	19.00	20	21.00	12.5	22	750	0.25	5	15.2	225
ZS4748A	Z22	20.90	22	23.10	11.5	23	750	0.25	5	16.7	205
ZS4749A	Z24	22.80	24	25.20	10.5	25	750	0.25	5	18.2	190
ZS4750A	Z27	25.65	27	28.35	9.5	35	750	0.25	5	20.6	170
ZS4751A	Z30	28.50	30	31.50	8.5	40	1000	0.25	5	22.8	150
ZS4752A	Z33	31.35	33	34.65	7.5	45	1000	0.25	5	25.1	135
ZS4753A	Z36	34.20	36	37.80	7.0	50	1000	0.25	5	27.4	125
ZS4754A	Z39	37.05	39	40.95	6.5	60	1000	0.25	5	29.7	115
ZS4755A	Z43	40.85	43	45.15	6.0	70	1500	0.25	5	32.7	110
ZS4756A	Z47	44.65	47	49.35	5.5	80	1500	0.25	5	35.8	95
ZS4757A	Z51	48.45	51	53.55	5.0	95	1500	0.25	5	38.8	90
ZS4758A	Z56	53.20	56	58.80	4.5	110	2000	0.25	5	42.6	80
ZS4759A	Z62	58.90	62	65.10	4.0	125	2000	0.25	5	47.1	70
ZS4760A	Z68	64.60	68	71.40	3.7	150	2000	0.25	5	51.7	65
ZS4761A	Z75	71.25	75	78.78	3.3	175	2000	0.25	5	56.0	60
ZS4762A	Z82	77.90	82	86.10	3.0	200	3000	0.25	5	62.2	55
ZS4763A	Z91	86.45	91	95.55	2.8	250	3000	0.25	5	69.2	50
ZS4764A	Z100	95.00	100	105.0	2.5	350	3000	0.25	5	76.0	45

Note : 5% tolerance of Zener voltage

DEVICE CHARACTERISTICS

ZS47xxA

FIG.1 MAXIMUM CONTINUOUS POWER DERATING

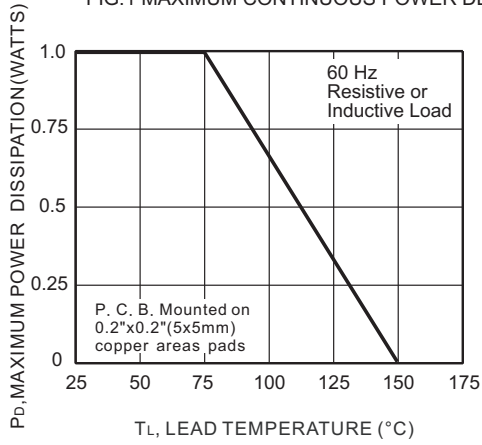


FIG.2A Range for Units to 12 Volts

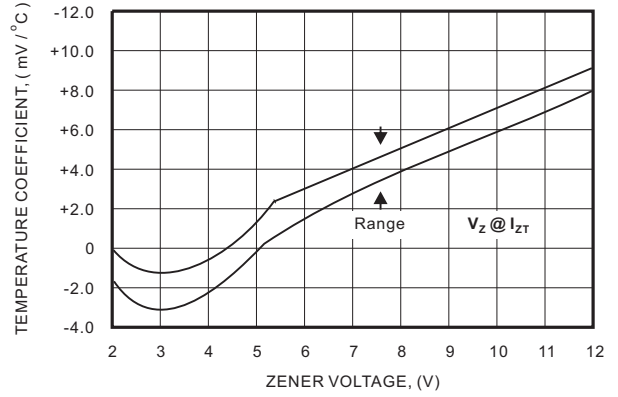


FIG.2B Range for Units to 12 to 100 Volts



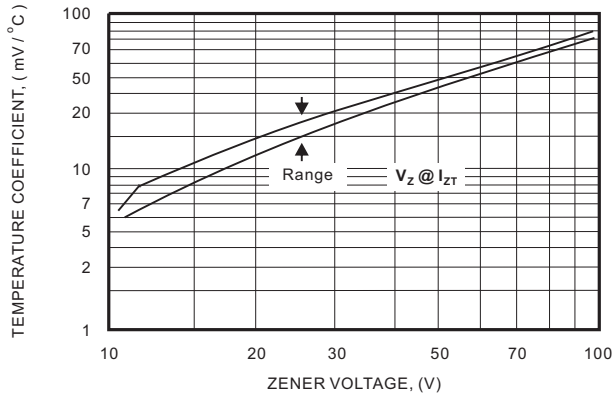


Fig. 3 Temperature Coefficients (-55°C to +150°C temperature change; 90% of the units are in the ranges indicated.)

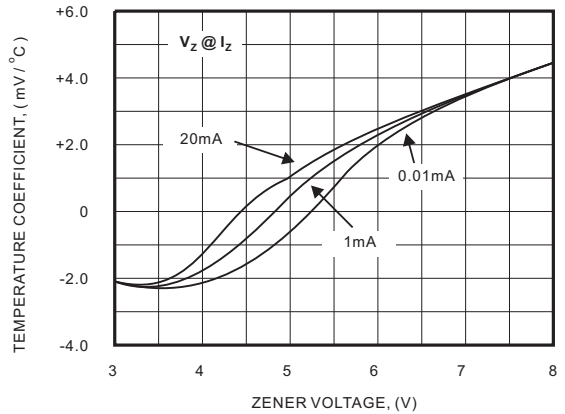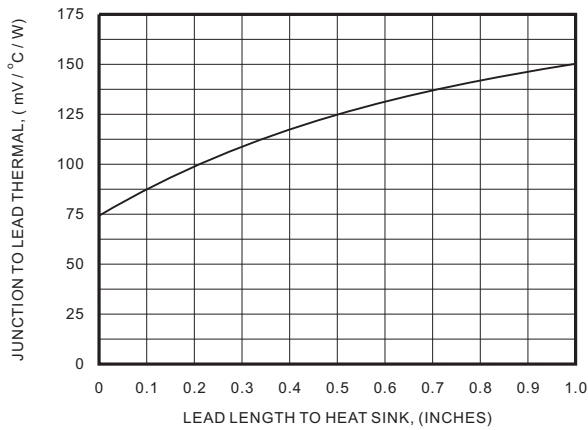

DEVICE CHARACTERISTICS

ZS47xxA

FIG.4 Typical Thermal Resistance versus Lead

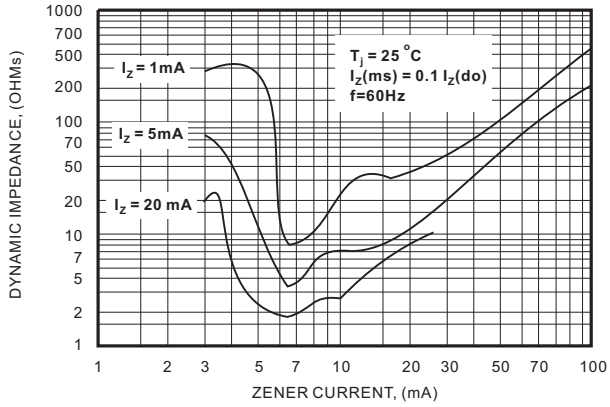


Fig 5. Effect of Zener Current


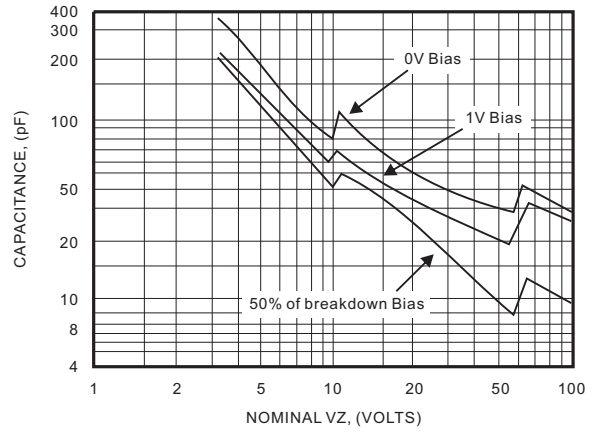




Fig 6. Maximum surge power

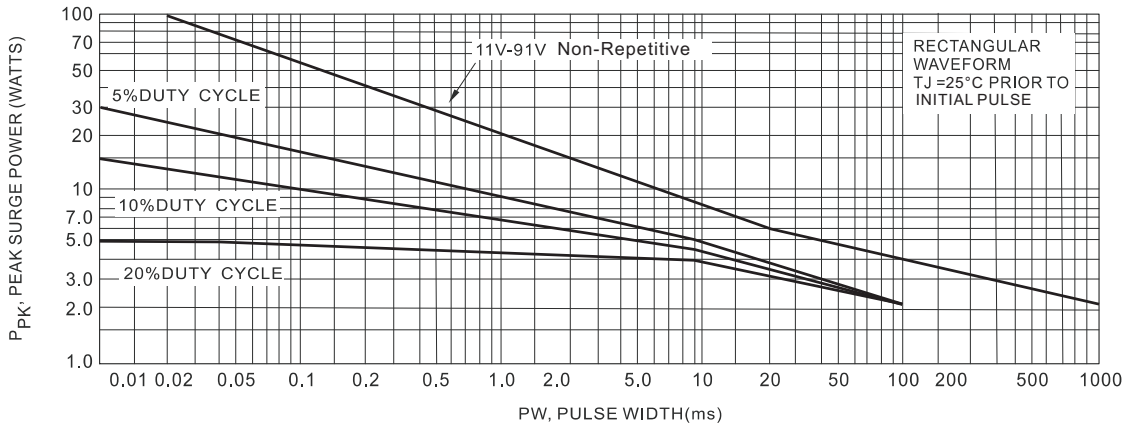


PACKAGE OUTLINE & DIMENSIONS

ZS47xxA

Pinning information

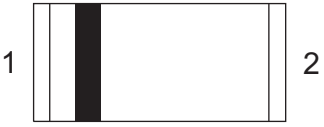Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Suggested solder pad layout

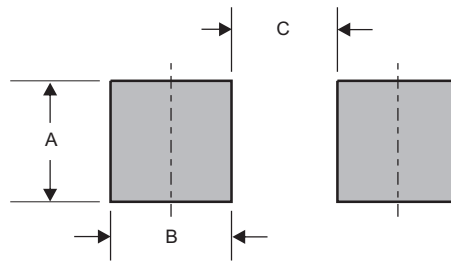

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMA	0.110 (2.80)	0.063 (1.60)	0.087 (2.20)