

Small Signal Product

Bi-directional ESD Protection Diode
FEATURES

- Meet IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- Meet IEC61000-4-4 (EFT) rating. 40A (5/50 μs)
- 100W peak pulse power per line ($t_p=8/20\mu\text{s}$)
- Protects one bi-directional I/O line
- Working Voltage: 5V
- Packing code with suffix "G" means green compound (halogen free)


DFN1006 (0402)

MECHANICAL DATA

- Case: DFN1006 (0402)
- Molding compound flammability rating: UL 94V-0
- Terminal: Gold plated, solderable per MIL-STD-750, method 2026
- High temperature soldering guaranteed : 260 $^{\circ}\text{C}/10\text{s}$
- Weight: 0.5 mg (approximately)
- Marking code: M


APPLICATIONS

- Cell Phone Handsets and Accessories
- Notebooks, Desktops, and Servers
- Keypads, Side Keys, LCD Displays
- Portable Instrumentation
- Touch Panel

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power ($t_p=8/20\mu\text{s}$ waveform)	P_{PP}	100	W
ESD per IEC 61000-4-2 (Air)	V_{ESD}	± 15	KV
ESD per IEC 61000-4-2 (Contact)		± 8	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$

PARAMETER	SYMBOL	MIN	MAX	UNIT
Stand-Off Voltage	V_{WM}	-	5	V
Reverse Breakdown Voltage	$V_{(BR)}$	6	-	V
Reverse Leakage Current	I_R	-	1	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{ A}$	12.5	V
		$I_{PP} = 2\text{ A}$	20	
Junction Capacitance	C_J	10		pF

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Admissible Power Derating Curve

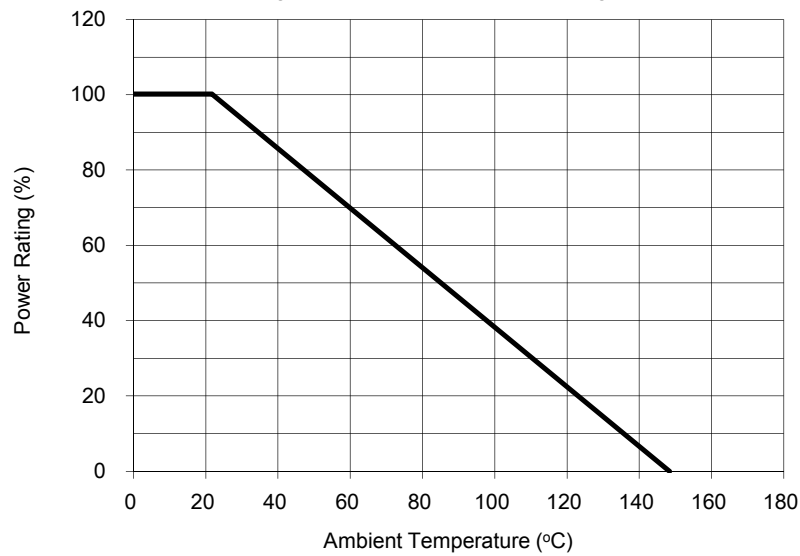


Fig. 2 Pulse Waveform

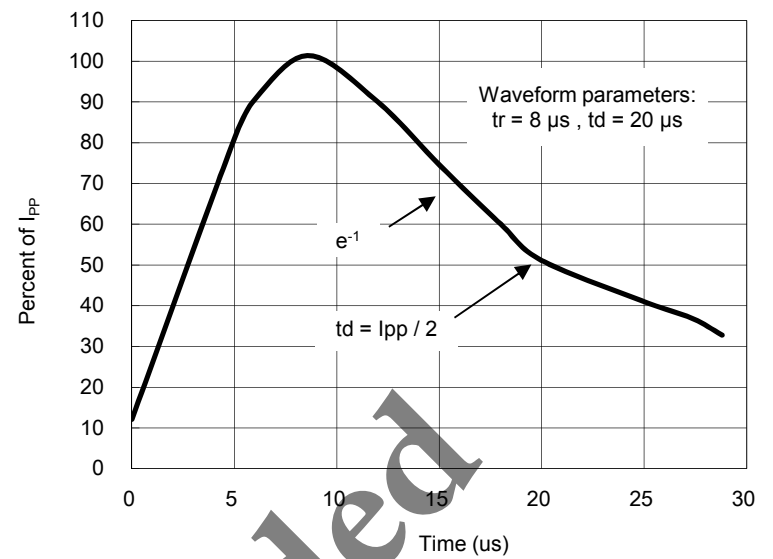


Fig. 3 Max. Clamping Voltage VS. Peak Pulse Current


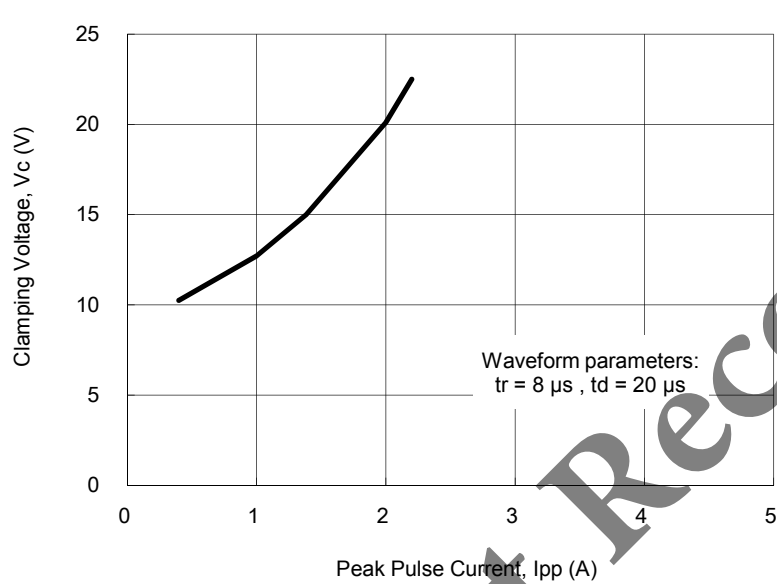


Fig. 4 Typical Junction Capacitance

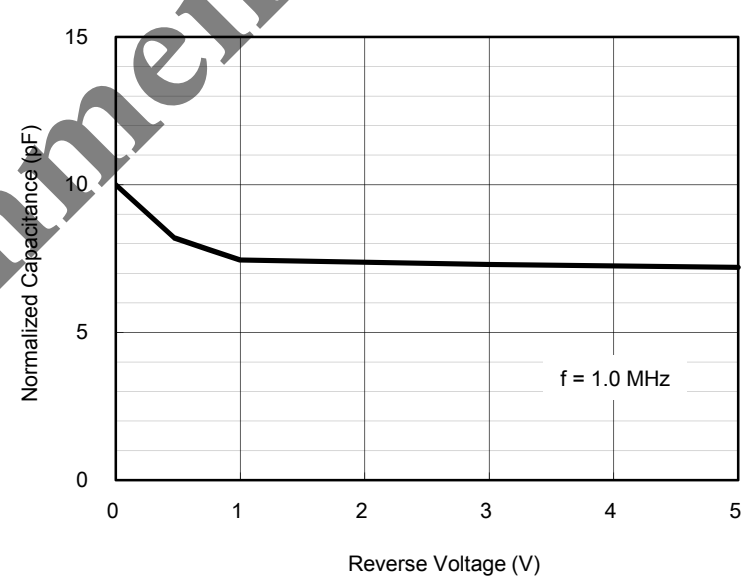

Applications Information

- ◇ Designed to protect one data, I/O, or power supply line
- ◇ Designed to protect sensitive electronics from damage or latch-up due to ESD
- ◇ Designed to replace multilayer varistors (MLVs) in portable applications
- ◇ Features large cross-sectional area junctions for conducting, high transient currents
- ◇ Offers superior electrical characteristics such as lower clamping voltage and no device degradation when compared to MLV
- ◇ The combination of small size and high ESD surge capability makes them ideal for use in portable applications

Circuit Board Layout Recommendations

Good circuit board layout is critical for suppression of ESD induced transients

- ◇ Place the ESD Protection Diode near the input terminals or connectors to restrict transient
- ◇ Minimize the path length between the ESD Protection Diode and the protected line
- ◇ Minimize all conductive loops including power and ground loops
- ◇ The ESD transient return path to ground should be kept as short as possible
- ◇ Never run critical signals near board edges
- ◇ Use ground planes whenever possible

Small Signal Product


ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX (Note 1)	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
TESDQ5V0	-xx	RJ	G	DFN1006 (0402)	10K / 7" Reel

Note 1: Part No. Suffix „-xx “ would be used for special requirement

EXAMPLE					
PREFERRED P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
TESDQ5V0 RJG	TESDQ5V0		RJ	G	Multiple manufacture source Green compound
TESDQ5V0-E0 RJG	TESDQ5V0	-E0	RJ	G	Define manufacture source Green compound


PACKAGE OUTLINE DIMENSION

DFN1006 (0402)

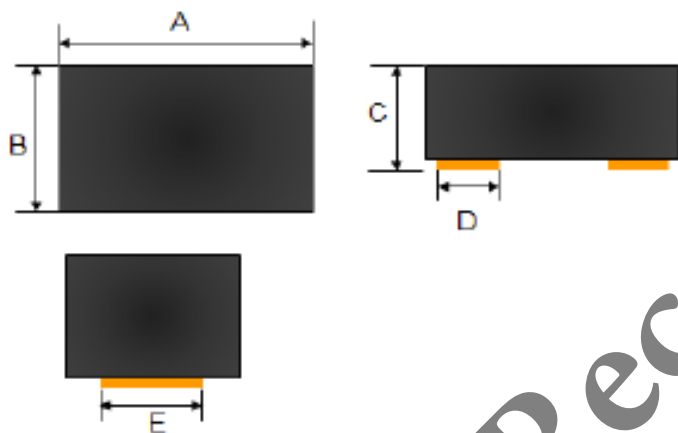

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	0.95	1.05	0.037	0.041
B	0.55	0.65	0.022	0.026
C	0.45	0.55	0.018	0.022
D	0.30 TYP.		0.012 TYP.	
E	0.50 TYP.		0.020 TYP.	

SUGGEST PAD LAYOUT

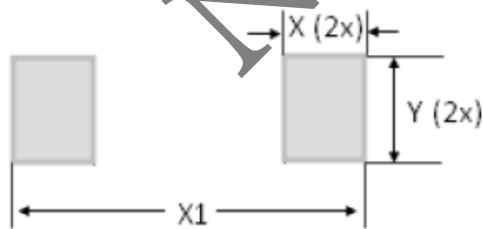

DIM.	Unit (mm)	Unit (inch)
	TYP.	TYP.
X	0.354	0.014
X1	1.110	0.044
Y	0.354	0.014

Not Recommended

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.