

KR Electronics, Inc.

General Description


KR Electronics part number 3037 is a 25 MHz Highpass Filter. Other bandwidths available. Please consult the factory.

Features

- 25 MHz Highpass Filter
- Sharp Elliptic Type
- 36 dB min Rejection at 20 MHz
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Overall Response (10 dB/div)

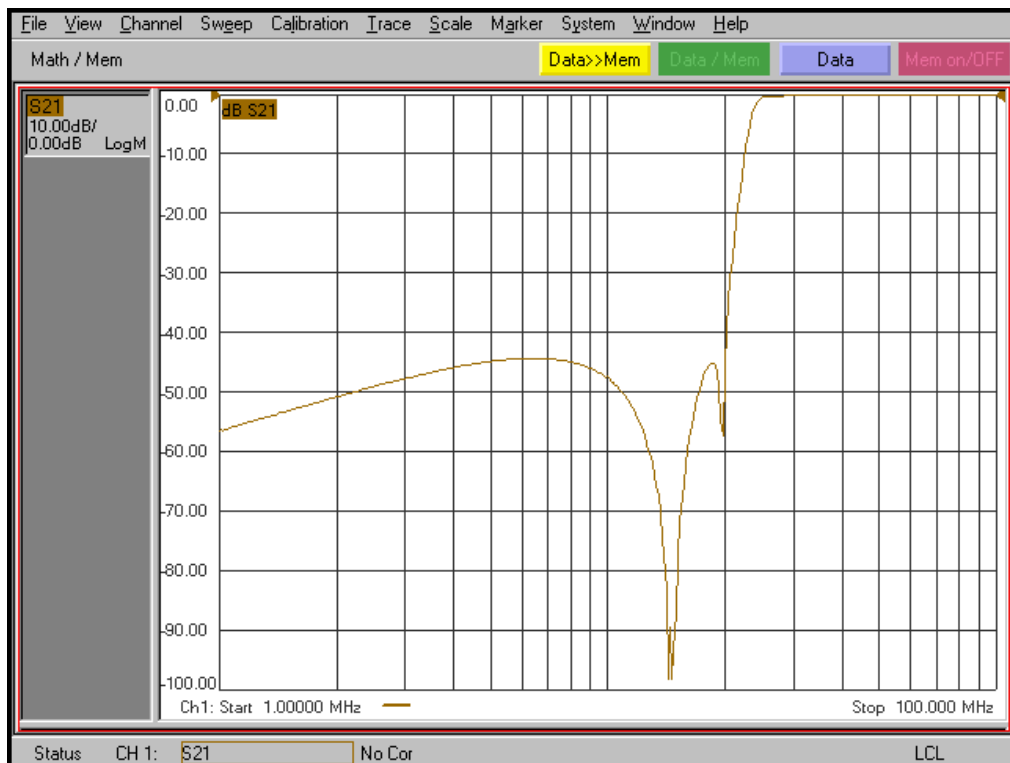

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3037

Specifications

Parameter	Specification	
Filter type	Highpass	
Start of Passband <1.5 dB	25 MHz	0.6 dB typical
Start of Stopband >36 dB	20 MHz	40 dB typical
1 dB Passband to	1 GHz typical	
Source and Load	50 Ω	

Physical Dimensions

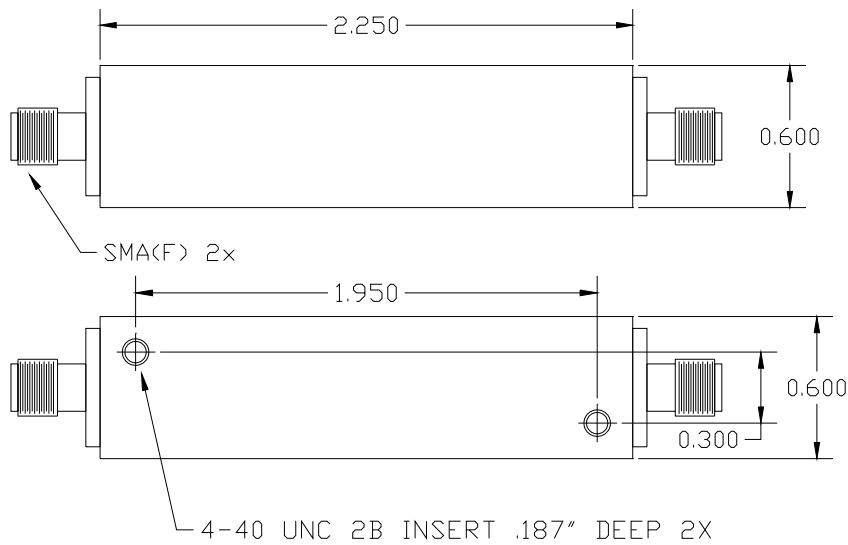

Notes:

1. Dimensions in inches
2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982