# ULTRA LOW CAPACITANCE STEERING DIODE ARRAY



### **DESCRIPTION**

The USB002 is an ultra low capacitance (0.6pF) steering diode array. This device provides circuit protection for interfaces and wireless bus applications and portable electronics. The USB002 is ideally suited to protect USB data I/O ports against the effects of ESD and EFT.

The USB002 meets the requirements of IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT). At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. The USB002 offers a ultra low capacitance and low leakage current in a SOT-543 package.

### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- ESD Protection > 25 kilovolts
- 225 Milliwatt Continuous Power Dissipation
- Provides 2 Lines of Protection
- Low Leakage Current < 1.0μA
- Ultra Low Capacitance: 0.6pF
- RoHS Compliant
- REACH Compliant

### **MECHANICAL CHARACTERISTICS**

- Molded JEDEC SOT-543 Package
- Approximate Weight: 3 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:


Pure-Tin - Sn, 100: 260-270°C

- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

### **APPLICATIONS**

- USB Interface Ports
- SMART Phones
- Video
- Portable Electronics
- Laptops

# **PIN CONFIGURATION**



# TYPICAL DEVICE CHARACTERISTICS


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified						
PARAMETER	SYMBOL	VALUE	UNITS			
Operating Temperature	T <sub>A</sub>	-55 to 150	°C			
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C			
Continuous Power Dissipation	P <sub>PC</sub>	225	mW			
Repetitive Peak Forward Current @ tp = 5µs, F = 50kHz (Pin 1-2)	I <sub>FRM</sub>	700	mA			

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	DEVICE MARKING	REPETITIVE PEAK REVERSE VOLTAGE (Note 1) @ 10µA V RRM VOLTS	MAXIMUM REVERSE LEAKAGE CURRENT (Note 2) @ V <sub>RRM</sub> @ 5V I <sub>R</sub> µA	MAXIMUM DIODE FORWARD VOLTAGE  @ 10mA V <sub>F</sub> VOLTS	MAXIMUM CAPACITANCE (Note 3)  C <sub>1</sub> pF		
USB002	U2	20	1	1.4	0.6		

# NOTES

- 1. V<sub>p</sub> V<sub>N</sub> = 20 Volts. 2. V<sub>p</sub> V<sub>N</sub> = 5.5 Volts. 3. Between line and ground V<sub>p</sub> = 5 Volts, f = 1 MHz, V<sub>1/0</sub> = 2.5 Volts, V<sub>N</sub> = 0 Volts.

# TYPICAL DEVICE CHARACTERISTICS

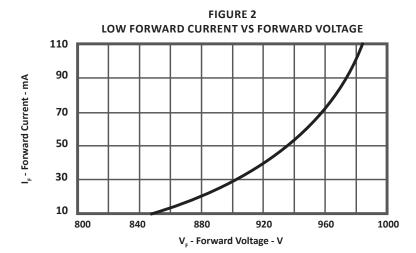







# **SOT-543 PACKAGE INFORMATION**

OUTLINE DIMENSIONS							
DIM	MILLIN	IETERS	INCHES				
	MIN	MAX	MIN	MAX			
Α	1.50	1.70	0.059	0.067			
В	1.10 1.30		0.043	0.051			
С	0.50	0.60	0.020	0.024			
D	0.17	0.27	0.007	0.011			
G	0.50	BSC	0.020	) BSC			
J	0.08	0.18	0.003	0.007			
K	0.10	0.30	0.004	0.012			
S	1.50	1.70	0.059	0.067			
R	0.05	0.15	0.002	0.006			






# NOTES


- 1. Controlling dimension: inches.
- 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
- 3. Dimensions are exclusive of mold flash and metal burrs.
- 4. Do not connect center stub.

1. Controlling dimension: inches.

PAD LAYOUT DIMENSIONS					
DIM	MILLIMETERS	INCHES			
	NOMINAL	NOMINAL			
А	1.02	0.040			
В	1.40	0.055			
С	0.30	0.012			
D	0.51	0.020			
NOTES					



# **TAPE AND REEL**

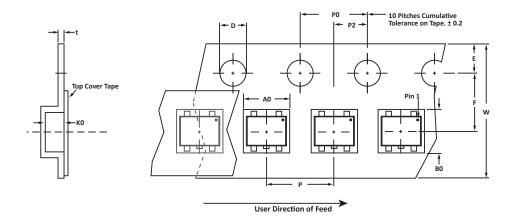

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	w	P0	P2	Р	tmax
178mm (7")	8mm	1.78 ± 0.05	1.78 ± 0.05	0.69 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

### NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 3,000 pieces per 8mm tape.
  4. Marking on Part marking code (see page 2) and polarity dot.

ORDERING INFORMATION							
BASE PART NUMBER   LEADFREE SUFFIX   TAPE SUFFIX   QTY/REEL   REEL SIZE   TUBE QTY							
USB002	-LF	-T7	3000	7"	n/a		
This device is only available in a Lead-Free configuration.							



## **COMPANY INFORMATION**

#### **COMPANY PROFILE**

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

### **CONTACT US**

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

# By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

### By E-mail:

Asia Sales: <u>asiasales@protekdevices.com</u>
Europe Sales: <u>europesales@protekdevices.com</u>
U.S. Sales: <u>ussales@protekdevices.com</u>
Distributor Sales: <u>distysales@protekdevices.com</u>

Customer Service: <a href="mailto:services.com">service:service@protekdevices.com</a>
Technical Support: <a href="mailto:support@protekdevices.com">support@protekdevices.com</a>

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

#### Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2007 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.