


Lowpass Filter


KR Model 2152

KR Model 2152 can be easily scaled to other passband frequencies to meet your requirements.

Passband Amplitude & Group Delay

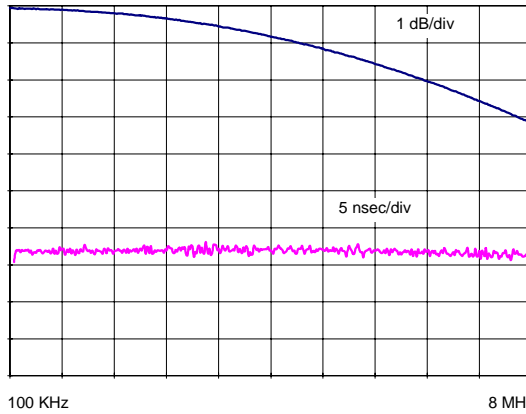


Overall Amplitude

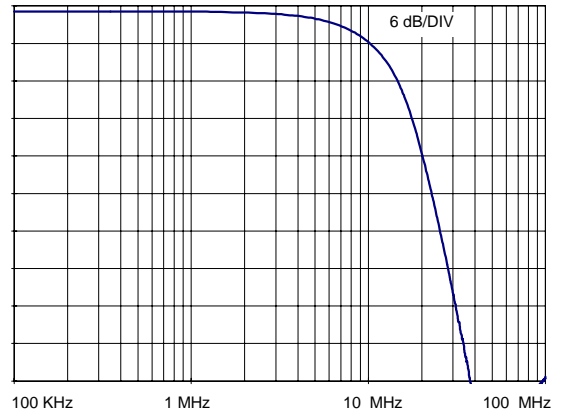

Specifications

KR Part Number	2152
Filter Type	Linear Phase Lowpass
Insertion Loss	< 1 dB
End of Passband (3 dB)	8 MHz
Group Delay Ripple	< 5 nsec
Source and Load Impedance	75 Ω

Outline Drawing

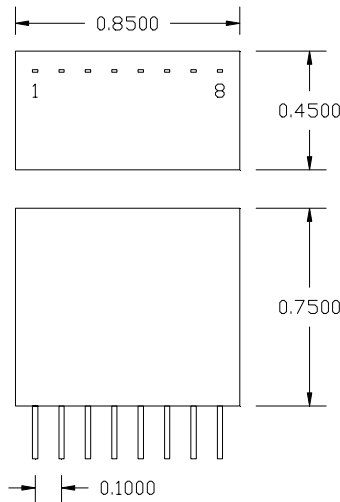

Epoxy SIP Package

Pin 1 is IN
Pin 8 is OUT
Pin 2 thru 7 are GND

Pins are .02 x .01

All Dimensions Shown in inches

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900