

# KR Electronics

## General Description


KR 2717 is a 60 MHz surface mount bandpass filter. Other center frequencies and bandwidths available. Please consult the factory.

### Features


- Surface Mount Package
- Sharp Transition to Stopband
- >60 dB Stopband
- 50  $\Omega$  Source and Load

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div & 10 nsec/div)

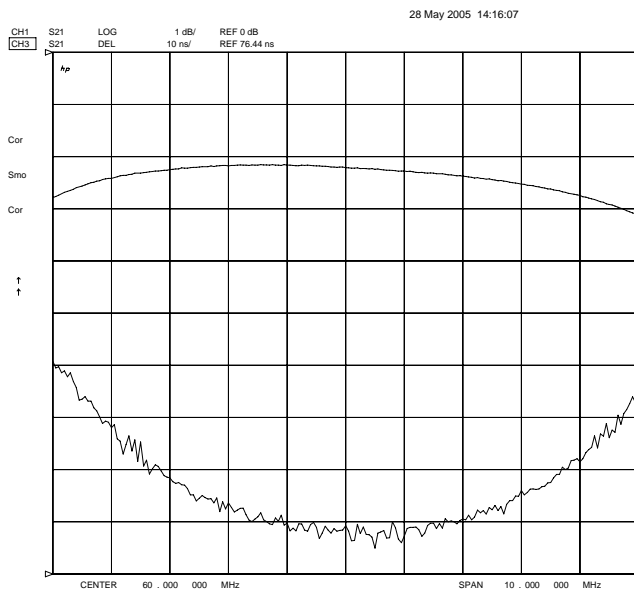

**Overall Response**  
(10 dB/div)

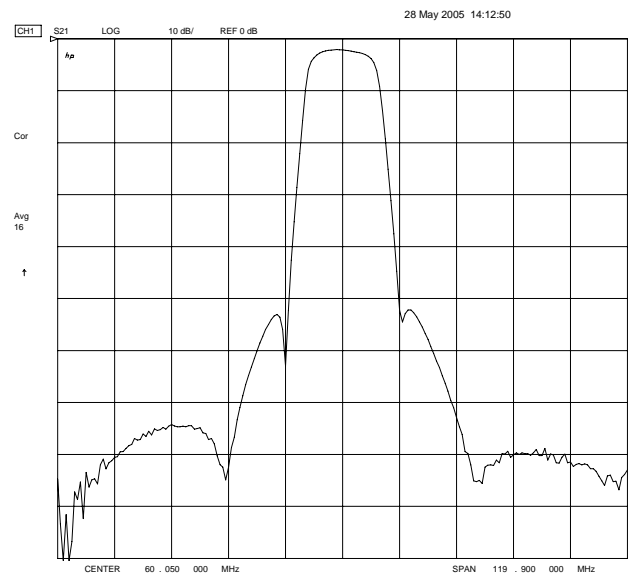

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2717 Bandpass

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	60 MHz
Insertion Loss	< 3 dB
Minimum 3 dB Bandwidth	10 MHz (13 MHz typical)
Maximum 40 dB Bandwidth	24 MHz (22 MHz typical)
Maximum 60 dB Bandwidth	50 MHz (40 MHz typical)
Source and Load	50 Ω

## Physical Dimensions

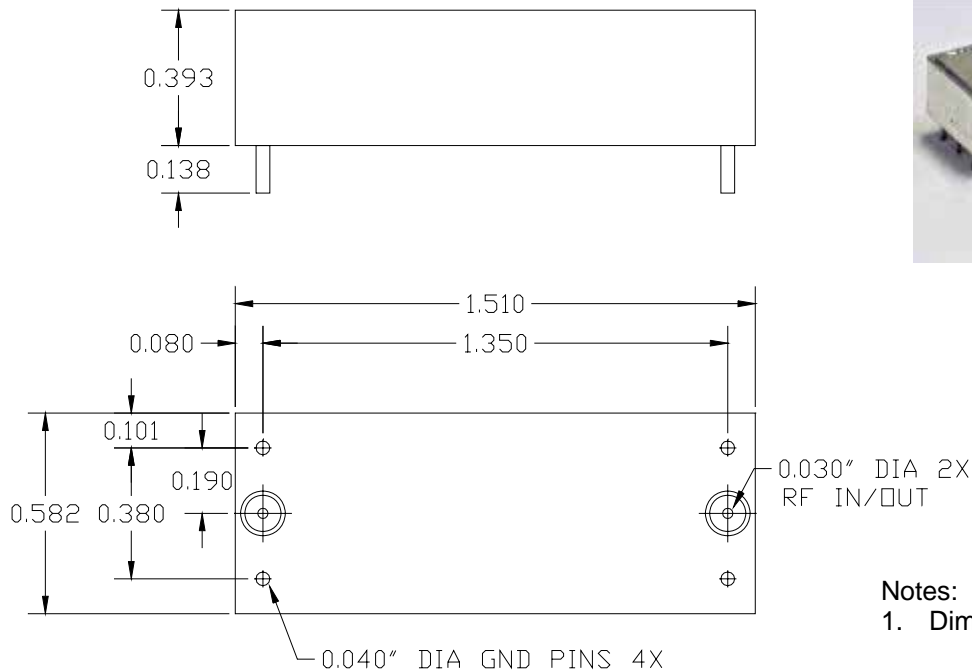

Notes:  
1. Dimensions in inches