

# AH1751

#### HALL EFFECT LATCH

#### **Features**

- Bipolar Hall Effect Latch Sensor
- 3.5V to 20V DC Operation Voltage
- Open Collector Pre-Driver
- 50mA Output Sink Current
- Chip Power Reverse-Connection Protection
- Operating Temperature: -40°C~125°C
- Package: SIP3
- SIP3: Available in "Green" Molding Compound (No Br, Sb)
- Lead Free Finish/ RoHS Compliant (Note 1)

### **General Description**


AH1751 is a single-digital-output Hall-effect sensor for high temperature operation. The device includes an on-chip Hall voltage generator for magnetic sensing, an amplifier to amplify Hall voltage, and a comparator to provide switching hysteresis for noise rejection, and an open-collector output pre-driver. An internal band-gap regulator is used to provide temperature compensated supply voltage for internal circuits and allows a wide operating supply range.

While the magnetic flux density (B) is larger than threshold Bop, the OUT pin turns on (low). If B removed toward Brp, the OUT pin is latched "on" state prior to B < Brp. When B < Brp, the OUT pin go into " off " state.

#### **Applications**

- Rotor Position Sensing
- Current Switch
- Encoder
- RPM Detection

## **Ordering Information**

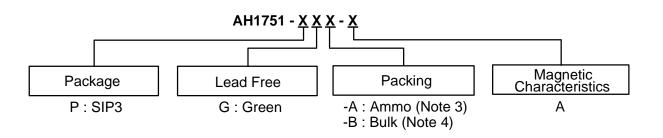

|     | Package Packagir |                 | Packaging             | Tube     | /Bulk                 | Ammo Box |                       |  |
|-----|------------------|-----------------|-----------------------|----------|-----------------------|----------|-----------------------|--|
|     | Device           | Package<br>Code | Packaging<br>(Note 2) | Quantity | Part Number<br>Suffix | Quantity | Part Number<br>Suffix |  |
| Pb, | AH1751-P         | Р               | SIP3                  | 1000     | -B                    | 4000/Box | -A                    |  |

RoHS revision 13.2.2003. Glass and high temperature solder exemptions applied, see EU Directive Annex Notes 5 and 7.
Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <a href="http://www.diodes.com/datasheets/an02001.pdf">http://www.diodes.com/datasheets/an02001.pdf</a>

3. Ammo Box is for SIP3 Spread Lead.

4. Bulk is for SIP3 Straight Lead.


AH1751 Rev. 1 - 2

Notes:



#### HALL EFFECT LATCH


## **Pin Assignment**

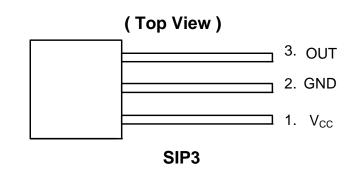

### **Pin Descriptions**

| Name            | Description  |  |  |  |  |
|-----------------|--------------|--|--|--|--|
| V <sub>CC</sub> | Input Power  |  |  |  |  |
| GND             | Ground       |  |  |  |  |
| OUT             | Output Stage |  |  |  |  |

## **Block Diagram**

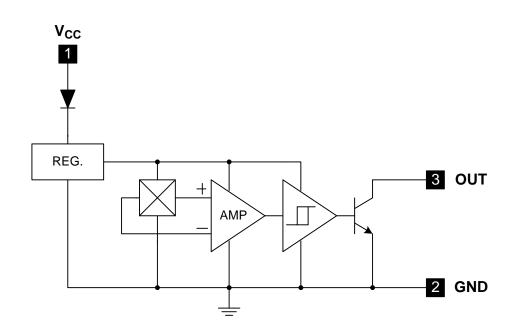



#### HALL EFFECT LATCH

### **Absolute Maximum Ratings** $(T_A = 25^{\circ}C)$

| Symbol                 | Param                     | Rating | Unit     |    |
|------------------------|---------------------------|--------|----------|----|
| V <sub>cc</sub>        | Supply Voltage            | 20     | V        |    |
| V <sub>out</sub> (off) | Output "OFF " Voltage     | 20     | V        |    |
| l <sub>o</sub> (sink)  | Output "ON" Current       |        | 100      | mA |
| T <sub>A</sub>         | Operating Temperature Ran | ge     | -40~+125 | °C |
| T <sub>ST</sub>        | Storage Temperature Range | )      | -65~+150 | ٥C |
| T <sub>J(MAX)</sub>    | Maximum Junction Tempera  | ture   | +150     | °C |
| PD                     | Power Dissipation         | SIP3   | 550      | mW |

### **Recommended Operating Conditions**

| Symbol          | Parameter      | Conditions         | Rating   | Unit |
|-----------------|----------------|--------------------|----------|------|
| V <sub>CC</sub> | Supply Voltage | Operating (Note 5) | 3.5 ~ 20 | V    |

#### **Electrical Characteristics** $(T_A = 25^{\circ}C)$

| Symbol                              | Parameter                 | Conditions   | Min | Тур. | Max | Unit |
|-------------------------------------|---------------------------|--|-----|------|-----|------|
| V <sub>out</sub> ( <sub>SAT</sub> ) | Output Saturation Voltage | V <sub>CC</sub> = 12V, OUT "ON"<br>I <sub>o</sub> = 50mA | -   | 200  | 300 | mV   |
| I <sub>CC</sub>                     | Supply Current            | V <sub>CC</sub> = 12V, OUT "OFF"                         | -   | 3.5  | 6   | mA   |

### **Magnetic Characteristics** $(T_A = 25^{\circ}C, V_{cc} = 4 \sim 20V)$

| A grade (1mT = 10 Gauss) |                 |          |    |     |       |  |  |  |
|--------------------------|-----------------|----------|----|-----|-------|--|--|--|
| Symbol Parameter         |                 | Min Typ. |    | Max | Unit  |  |  |  |
| Вор                      | Operation Point | 5        | -  | 70  | Gauss |  |  |  |
| Brp                      | Release Point   | -70      | -  | -5  | Gauss |  |  |  |
| Bhy                      | Hysteresis      | -        | 75 | -   | Gauss |  |  |  |


Notes: 5. Operating, the output is switching as magnetic field change (S>300G, N<-300G).

6. Magnetic characteristics are design information, which will vary with supply voltage, operating temperature and after soldering.




#### HALL EFFECT LATCH

### **Operating Characteristics**

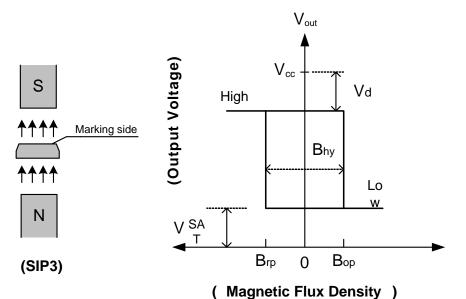

### **Performance Characteristics**

| T <sub>A</sub> (°C) | 25  | 50  | 60  | 70  | 80  | 85  | 90  | 95  | 100 |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| P <sub>D</sub> (mW) | 550 | 440 | 396 | 352 | 308 | 286 | 264 | 242 | 220 |
| T <sub>A</sub> (°C) | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 | 150 |
| P <sub>D</sub> (mW) | 198 | 176 | 154 | 132 | 110 | 88  | 66  | 44  | 0   |

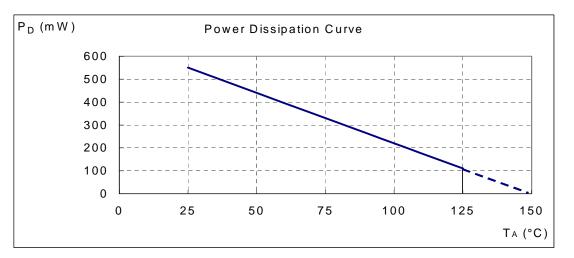




AH1751


HALL EFFECT LATCH

### **Marking Information**

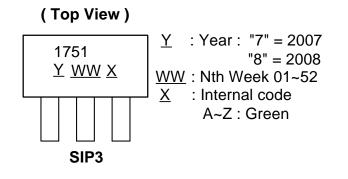


### Package Information (All Dimensions in mm)


(1) Package Type: SIP3 for Bulk pack



Active Area Depth



#### Package Dimension

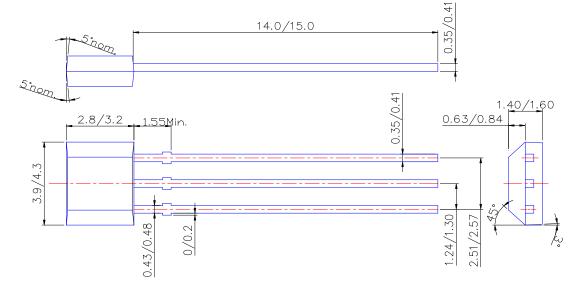

# AH1751




## Package Information (Continued)

Δ

O R

ORP

#### (2) Package Type: SIP3 for Ammo pack

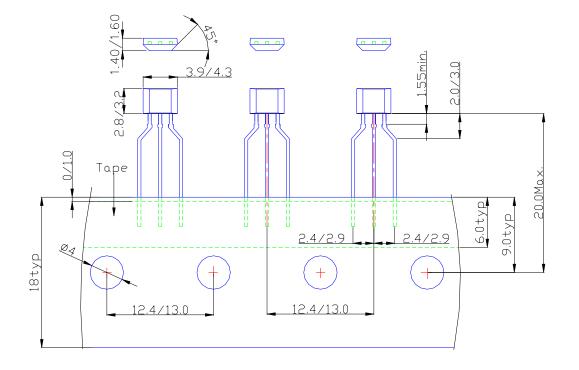

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.