LOW CAPACITANCE STEERING DIODE ARRAY



DESCRIPTION

The ET108 is a low capacitance steering diode array designed to protect circuit applications with a bus voltage of less than 25 volts from the effects of Electrostatic Discharge (ESD). This device is designed for the protection of four I/O ports.

With a low input capacitance per line of less than 6pF, pulse two diode pairs for each line, the ET108 provides both positive and negative transient protection. This device meets all the applicable voltage immunity standards, including IEC 61000-4-2 (ESD), 61000-4-4 (EFT) and 61000-4-5 (Surge).

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 12A, $8/20\mu s$ Level 1(Line-Gnd) & Level 2(Line-Line)
- Provides 4 Lines/Ports of Protection
- Low Leakage Current: < 2.0μA
- Ultra Low Capacitance: 6pF per Diode
- RoHS Compliant
- REACH Compliant

MECHANICAL CHARACTERISTICS

- Molded JEDEC SO-8 Package
- Approximate Weight: 70 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:


Pure-Tin - Sn, 100: 260-270°C

- 12mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

APPLICATIONS

- Ethernet 10/100/1000 Base T
- RS-422 and RS-485
- Microcontrollers
- USB Interface

PIN CONFIGURATION





TYPICAL DEVICE CHARACTERISTICS


MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER	SYMBOL	VALUE	UNITS				
Operating Temperature	T _A	-55 to 150	°C				
Storage Temperature	T _{stg}	-55 to 150	°C				
Continuous Power Dissipation	P _{PC}	730	mW				


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified									
PART NUMBER	DEVICE MARKING	REPETITIVE PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE 8/20µs @ 50mA	MAXIMUM PEAK PULSE FORWARD CURRENT (Fig. 1) @ 8/20µs	MAXIMUM FORWARD VOLTAGE 8/20µs @ 12A	MAXIMUM REVERSE LEAKAGE CURRENT V _{RRM}	TYPICAL CAPACITANCE (Note 1)		
		V _{RRM} VOLTS	V _F VOLTS	I _{FM} AMPS	V _F VOLTS	I _R μΑ	C _J pF		
ET108	ET108	25	1.2	12	9	2	6		

NOTE

^{1.} Apply a 5V bias between pin 5 (REF 2) to pin 7 (REF 1). Measure C_i between any I/O pins to pin 7 (REF 1) and divide by 2.

TYPICAL DEVICE CHARACTERISTICS

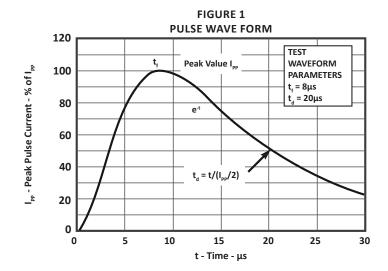

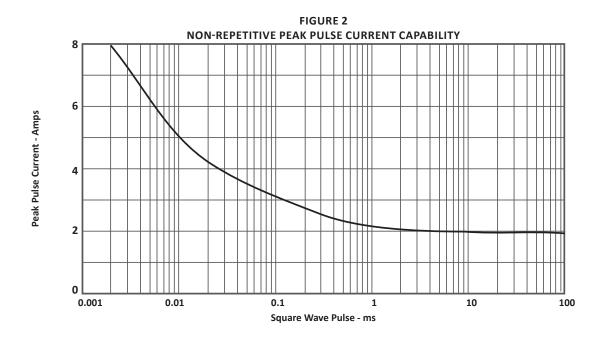




SO-8 PACKAGE INFORMATION

OUTLINE DIMENSIONS							
DIM	MILLIN	IETERS	INCHES				
	MIN	MAX	MIN	MAX			
Α	4.80	5.00	0.189	0.196			
В	3.80	4.00	0.150	0.157			
С	1.35	1.75	0.054	0.068			
D	0.35	0.49	0.014	0.019			
F	0.40	1.25	0.016	0.049			
G	1.27	BSC	0.05	BSC			
J	0.18	0.25	0.007	0.009			
К	0.10	0.25	0.004	0.008			
Р	5.80	6.20	0.229	0.244			
R	0.25	0.50	0.010	0.019			

NOTES


- 1. -T- = Seating plane and datum surface.
- 2. Dimensions "A" and "B" are datum.
- 3. Dimensions "A" and "B" do not include mold protrusion.
- 4. Maximum mold protrusion is 0.015" (0.380mm) per side.
- 5. Dimensioning and tolerances per ANSI Y14.5M, 1982.
- 6. Dimensions are exclusive of mold flash and metal burrs.

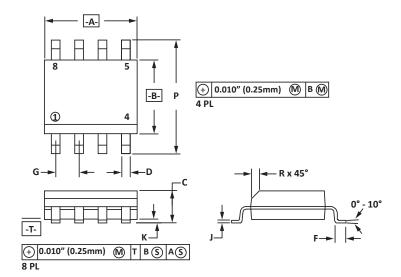


PAD LAYOUT DIMENSIONS							
DIM	MILLIN	IETERS	INCHES				
	MIN	MAX	MIN	MAX			
А	1.14	1.40	0.045	0.055			
В	0.64	0.89	0.025	0.035			
С	6.22	-	0.245	-			
D	3.94	4.17	0.155	0.165			
Е	1.02	1.27	0.040	0.050			

NOTES

1. Controlling dimension: inches.



TAPE AND REEL

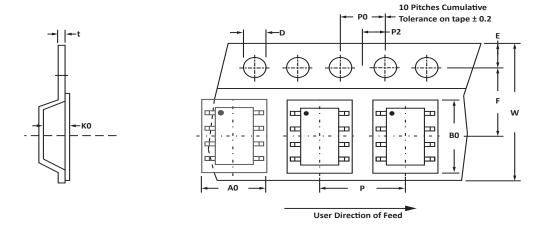

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	ко	D	E	F	w	P0	P2	Р	tmax
178mm (7")	12mm	6.50 ± 0.10	5.40 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	12.00 ± 0.30	4.00 ± 0.12	2.00 ± 0.10	8.00 ± 0.10	0.25

NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 1,000 pieces per 12mm tape.
- 4. Suffix T13 = 13" Reel 2,500 pieces per 12mm tape.
- 5. Bulk product shipped in tubes of 98 pieces per tube.
- 6. Marking on Part marking code (see page 2), date code, logo and pin one defined by dot on top of package.

ORDERING INFORMATION								
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUB								
ET108	-LF	-T7	1,000	7"	98			
ET108	08 -LF -T13 2,500 13"							
This device is only available in a Lead-Free configuration.								



COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

CONTACT US

Corporate Headquarters

2929 South Fair Lane Tempe, Arizona 85282 USA

By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2002 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.