MOSEL-VITELIC MS62256H 32K x 8 HIGH SPEED CMOS STATIC RAM

ADVANCED INFORMATION

Features

- n High-speed 15/20/25/35 ns
- n Low Power dissipation: MS62256HL 1.1W (Max.) Operating 1mW (Max.) Power down
- n Fully static operation
- n All inputs and outputs directly TTL compatible
- n Three state outputs
- n Ultra low data retention supply current at $V_{CC} = 2V$


Description


The MS62256H is a 262,144-bit static random access memory organized as 32,768 words by 8 bits and operates from a single 5 volt supply. It is built with MOSEL-VITELIC's high performance twin tub CMOS process. Inputs and three-state outputs are TTL compatible and allow for direct interfacing with common system bus structures. The MS62256H is available in the following standard 28-pin packages:

600 MIL Plastic DIP 300 MIL Plastic DIP 300 MIL Small Outline J-Bend (SOJ)

Pin Configurations

Functional Block Diagram



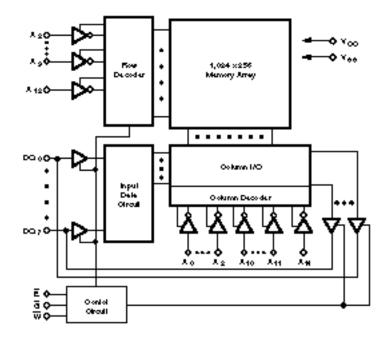

Pin Descriptions

A₀ - A₁₄ Address Inputs

These 15 address inputs select one of the 32768 8-bit words in the RAM.

E Chip Enable Input

 \underline{E} is active LOW. The chip enable must be active to read from or write to the device. If it is not active, the device is deselected and is in a standby power mode. The DQ pins will be in the high-impedance state when deselected.

G Output Enable Input

The output enable input is active LOW. If the output enable is active while the chip is selected and the write enable is inactive, data will be present on the DQ pins and they will be enabled. The DQ pins will be in the high impedance state when \underline{G} is inactive.

Truth Table

Mode	E	G	W	I/O Operation
Standby	н	Х	х	High Z
Read	L	L	Н	D _{OUT}
Output Disabled	L	Н	Н	High Z
Write	L	х	L	D _{IN}

Absolute Maximum Ratings (1)

		<u> </u>		
Symbol	Parameter	Rating	Units	
V _{CC}	Supply Voltage		-0.3 to 7	
V _{IN}	Input Voltage	-0.3 to 7	V	
V _{DQ}	Input/Output Voltage	-0.3 to 6		
T _{BIAS}	Temperature Under Bias	Plastic	-10 to +125	°C
T _{STG}	Storage Temperature	Plastic	-40 to +150	°C
PD	Power Dissipation		1.2	W
I _{OUT}	DC Output Current		50	mA

Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability and degrade performance characteristics.

MS62256H

W Write Enable Input

The write enable input is active LOW and controls read and write operations. With the chip enabled, when \underline{W} is HIGH and \underline{G} is LOW, output data will be present at the DQ pins; when \underline{W} is LOW, the data present on the DQ pins will be written into the selected memory location.

DQ₀ - DQ₇ Data Input/Output Ports

These 8 bidirectional ports are used to read data from or write data into the RAM.

V _{CC}	Power Supply
- 66	

V_{SS} Ground

Operating Range

Range	Ambient Temperature	V _{cc}	
Commercial	0°C to +70°C	5V ± 10%	

MS62256H

Parameter			N	//S62256	Н	
Name	Parameter	Test Conditions	Min.	Typ.(1)	Max.	Units
V _{IL}	Guaranteed Input Low Voltage ^(2,3)		-0.3	-	0.8	V
V _{IH}	Guaranteed Input High Voltage ⁽²⁾		2.2	-	6.0	V
I _{IL}	Input Leakage Current	V_{CC} = Max, V_{IN} = 0V to V_{CC}	-2	-	2	μA
I _{OL}	Output Leakage Current	V_{CC} = Max, <u>E</u> = V _{IH} or <u>G</u> = V _{IH} , V _{IN} = 0V t o V _{CC}	-2	-	2	μA
V _{OL}	Output Low Voltage	V _{CC} = Min, I _{OL} = 8mA	-	-	0.4	V
V _{OH}	Output High Voltage	V _{CC} = Min, I _{OH} = -4.0mA	2.4	-	-	V
I _{CC}	Operating Power Supply Current	V_{CC} = Max, $E = V_{IL}$, I_{DQ} = 0mA, $F = F_{max}^{(4)}$	-	-	200	mA
I _{CCSB}	Standby Power Supply Current	$V_{CC} = Max, E_{IH}, I_{DQ} = 0mA$	-	-	40	mA
I _{CCSB1}	Power Down Power Supply	V _{CC} = Max, <u>E</u> ≥V _{CC} − 0.2V	-	-	2	mA
	Current	V _{IN} ≥V _{CC} – 0.2V or V _{IN} ⊴0.2V	-	-	130 ⁽⁵⁾	μA

DC Electrical Characteristics (over the commercial operating range)

Typical characteristics are at $V_{CC} = 5V$, $T_A = 25^{\circ}C$. 1.

2. These are absolute values with respect to device ground and all overshoots due to system or tester noise are included.

 V_{IL} (Min.) = -3.0V for pulse width \leq 20ns 3.

4. $F_{MAX} = 1/t_{RC}$

5. L version only.

$Capacitance^{(1)}$ T_A = 25°C, f = 1.0MHz

Symbol	Parameter	Conditions	Max.	Unit	
C _{IN}	C IN Input Capacitance		8	рF	
C _{I/O}	Input/Output Capacitance	$V_{I/O} = 0V$	10	рF	

1. This parameter is guaranteed and not tested.

Data Retention Characteristics (over the commercial operating range)


Symbol	Parameter	Test Conditions	Min.	Typ. ⁽¹⁾	Max ⁽²⁾	Units
V _{DR}	V _{CC} for Data Retention	$E \ge V_{CC} - 0.2V, V_{IN} \ge V_{CC} - 0.2V \text{ or } V_{IN} \le 0.2V$	2.0(-	-	V
ICCDR	Data Retention Current	$\underline{E} \ge V_{CC} = 0.2V, V_{IN} \ge V_{CC} = 0.2V \text{ or } V_{IN} \le 0.2V$	-	2	50 ⁴⁾	μA
t _{CDR}	Chip Deselect to Data Retention		0	-	-	ns
	Time	See Retention Waveform				
t _R	Operation Recovery Time		t _{RC} ⁽³⁾	-	-	ns

 $V_{CC} = 2V, T_A = +25^{\circ}C$ $V_{CC} = 3V$ 1.

2.

t_{RC} = Read Cycle Time 3.

Timing Waveform Low V_{CC} Data Retention Waveform




MS62256H


AC Test Conditions

Input Pulse Levels	0V to 3.0V
Input Rise and Fall Times	3ns
Timing Reference Level	1.5V

Key to Switching Waveforms



AC Test Loads and Waveforms

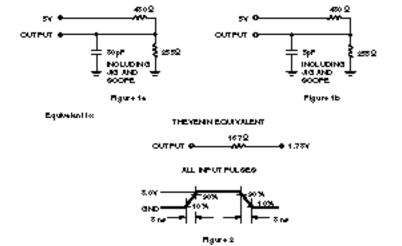


AC Electrical Characteristics (over the commercial operating range)

Jedec			MS62	S62256H-15 MS62256H-20 N		MS62	256H-25	MS622	256H-35		
Parameter Name	Parameter Name	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Unit
t _{AVAX}	t _{RC}	Read Cycle Time	15	-	20	-	25	-	35	-	ns
t _{AVQV}	t _{AA}	Address Access Time	-	15	-	20	-	25	-	35	ns
t _{ELQV}	t _{ACS}	Chip Enable Access Time	-	15	-	20	-	25	-	35	ns
t _{GLQX}	t _{OE}	Output Enable to Output Valid	-	8	-	10	-	12	-	15	ns
t _{EHQZ}	t _{CLZ}	Chip Enable to Output Low Z	5	-	5	-	5	-	5	-	ns
t _{GLQX}	t _{OLZ}	Output Enable to Output in Low Z	0	-	0	-	0	-	0	-	ns
t _{EHQZ}	t _{CHZ}	Chip Disable to Output in High Z	-	8	-	8	-	10	-	15	ns
t _{GHQZ}	t _{OHZ}	Output Disable to Output in High Z	-	8	-	8	-	10	-	15	ns
t _{AXQX}	t _{OH}	Output Hold from Address Change	3	-	5	-	5	-	5	-	ns


MS62256H

Switching Waveforms (Read Cycle)


READ CYCLE 1⁽¹⁾

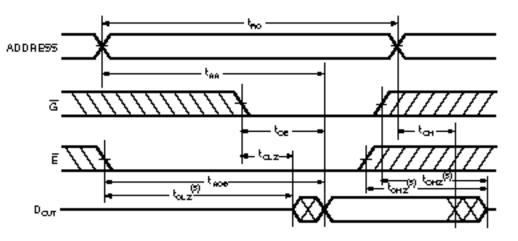

READ CYCLE 2(1, 2, 4)



READ CYCLE 3(1, 3, 4)



NOTES:

- W is High for READ Cycle. 1.
- 2.
- Device is continuously selected $\underline{E} = V_{IL}$. Address valid prior to or coincident with \underline{E} transition low. 3.
- 4. $\underline{G} = V_{IL}$.
- Transition is measured \pm 500mV from steady state with C_L = 5pF as shown in Figure 1b. This parameter is guaranteed and not 5. 100% tested.

MS62256H


AC Electrical Characteristics (over the commercial operating range)

Jedec			MS62256H-15		MS62256H-15 MS62256H-20 N		MS62	256H-25	MS622	256H-35	
Parameter Name	Parameter Name	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Unit
t _{AVAX}	t _{WC}	Write Cycle Time	15	-	20	-	25	-	35	-	ns
t _{ELWH}	t _{CW}	Chip Enable to End of Write	10	-	15	-	20	-	25	-	ns
t _{AVWL}	t _{AS}	Address Set up Time	0	-	0	-	0	-	0	-	ns
t _{AVWH}	t _{AW}	Address Valid to End of Write	10	-	15	-	20	-	25	-	ns
t _{WLWH}	t _{WP}	Write Pulse Width	12	-	12	-	15	-	20	-	ns
t _{WHAX}	t _{WR}	Write Recovery Time	0	-	0	-	0	-	0	-	ns
t _{WLQZ}	t _{WHZ}	Write to Output in High Z	0	10	0	10	0	13	0	15	ns
t _{DVWH}	t _{DW}	Data to Write Time Overlap	8	-	10	-	13	-	15	-	ns
t _{WHDX}	t _{DH}	Data Hold from Write Time	0	-	0	-	0	-	0	-	ns
t _{GHQZ}	t _{OHZ}	Output Disable to Output in High Z	0	8	0	8	0	10	0	-	ns
t _{WHQX}	t _{ow}	Output Active from End of Write	3	-	3	-	3	-	0	-	ns

Write Cycle


Switching Waveforms (Write Cycle)

WRITE CYCLE 1⁽¹⁾

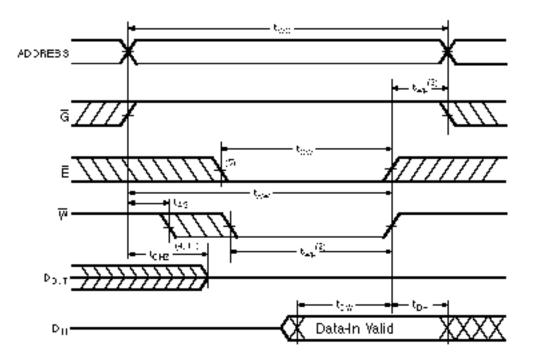

MS62256H

Switching Waveforms (Write Cycle)

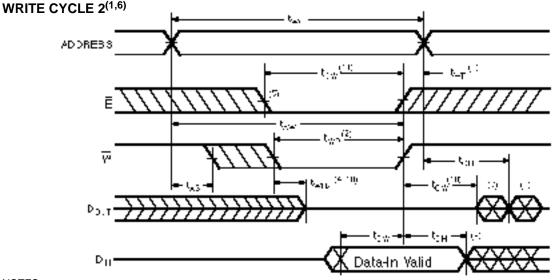

NOTES:

- 1. <u>W</u> must be high during address transitions.
- 2. The internal write time of the memory is defined by the overlap <u>E</u> active and <u>W</u> low. Both signals must be active to initiate and any one signal can terminate a write by going inactive. The data input setup and hold timing should be referenced to the second transition edge of the signal that terminates the write.
- 3. T_{WR} is measured from the earlier of <u>E</u> or <u>W</u> going high at the end of write cycle.
- 4. During this period, DQ pins are in the output state so that the input signals of opposite phase to the outputs must not be applied.
- 5. If the E low transition occurs simultaneously with the <u>W</u> low transitions or after the <u>W</u> low transition, outputs remain in a high impedance state.
- 6. <u>G</u> is continuously low (<u>G</u> = V_{IL}).
- 7. D_{OUT} is the same phase of write data of this write cycle.
- 8. D_{OUT} is the read data of next address.
- 9. If <u>E</u> is low during this period, DQ pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.
- Transition is measured ±500mV from steady state with C_L = 5pF as shown in Figure 1b on page 4. This parameter is guaranteed and not 100% tested.
- 11. t_{CW} is measured from <u>E</u> going low to the end of write.


MS62256H


Ordering Information


Speeds	Ordering Part Number	Package	Temperature Range			
15	MS62256H-15NC	28 Pin Plastic DIP - 300 mil	0°C to +70°C			
15	MS62256H-15RC	28 Pin Small Outline J Bend	0°C to +70°C			
20	MS62256H-20NC	28 Pin Plastic DIP - 300 mil	0°C to +70°C			
20	MS62256H-20RC	28 Pin Small Outline J Bend	0°C to +70°C			
25	MS62256H-25NC	28 Pin Plastic DIP - 300 mil	0°C to +70°C			
25	MS62256H-25RC	28 Pin Small Outline J Bend	0°C to +70°C			
35	MS62256H-35NC	28 Pin Plastic DIP - 300 mil	0°C to +70°C			
35	MS62256H-35RC	28 Pin Small Outline J Bend 0°C to +70°C				

Package Dimensions

28 Pin 300 mil Plastic DIP

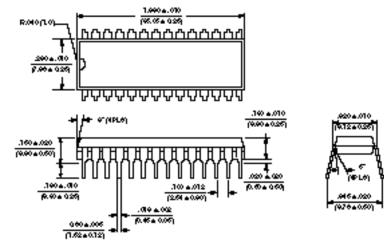



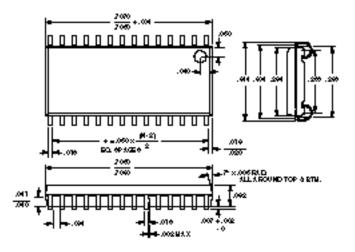

U.S.A.

3910 NORTH FIRST STREET SAN JOSE, CA 95134 PHONE: 408-433-6000 FAX: 408-433-00952

HONG KONG

19 DAI FU STREET TAIPO INDUSTRIAL ESTATE TAIPO, NT, HONG KONG PHONE: 011-852-665-4883 FAX: 011-852-664-7535 TAIWAN 5F, NO.. 102 MIN CHUAN E. ROAD, SEC.3 TAIPEI PHONE: 011-886-2-545-1213 FAX: 011-886-2-545-1214

WORLDWIDE OFFICES

1 R&D ROAD I SCIENCE BASED IND. PARK HSIN CHU, TAIWAN, R.O.C. PHONE: 011-886-35-77055 FAX: 011-886-35-776520

JAPAN

RM.302 ANNEX-G HIGASHI-NAKANO NAKANO-KU, TOKYO 164 PHONE: 011-81-03-3365-2851 FAX: 011-81-03-3365-2836

KSP R&D C-4F, SSAKADO 3-2-1 TAKATSU-KU, KAWASAKI-SHI KANAGAWA PREF 213 PHONE: 011-81-04-4812-4397 FAX: 011-81-04-4812-4074

KOREA

RM. 309, BEUK-EUN BLDG. 1339-1 SEOCHO-DONG, SEOCHO-KU SEOUL, KOREA PHONE: 011-82-2-553-3385 FAX: 011-82-2-553-3675

U.S. SALES OFFICES

NORTHWESTERN

3910 NORTH FIRST STREET SAN JOSE, CA 95134 PHONE: 408-433-6000 FAX: 408-433-0952

NORTHEASTERN

SUITE 306 71 SPITBROOK ROAD NASHUA, NH 03062 PHONE: 603-891-2007 FAX: 603-891-3597

SOUTHWESTERN

SUITE 200 5150 E. PACIFIC COAST HWY. LONG BEACH, CA 90804 PHONE: 310-498-3314 FAX: 310-597-2174

CENTRAL & SOUTHEASTERN

604 FIELDWOOD CIRCLE RICHARDSON, TX 75081 PHONE: 214-690-1402 FAX: 214-690-0341

© Copyright 1993, MOSEL-VITELIC Inc.

5/93 Printed in U.S.A.

The information in this document is subject to change without notice.

MOSEL-VITELIC makes no commitment to update or keep current the information contained in this document. No part of this document may be copied or reproduced in any form or by any means without the prior written consent of MOSEL-VITELIC. MOSEL-VITELIC subjects its products to normal quality control sampling techniques which are intended to provide an assurance of high quality products suitable for usual commercial applications. MOSEL-VITELIC does not do testing appropriate to provide 100% product quality assurance and does not assume any liability for consequential or incidental arising from any use of its products. If such products are to be used in applications in which personal injury might occur from failure, purchaser must do its own quality assurance testing appropriate to such applications.

MS62256H