

N-Channel Mosfet Transistor


MTP1N60

• FEATURES

- Drain Current $-I_D = 1A @ T_C = 25^\circ C$
- Drain Source Voltage-
 : $V_{DSS} = 600V(\text{Min})$
- Static Drain-Source On-Resistance
 : $R_{DS(on)} = 8 \Omega (\text{Max})$
- Avalanche Energy Specified
- Fast Switching
- Simple Drive Requirements

• DESCRIPTION

- Designed for high efficiency switch mode power supply.

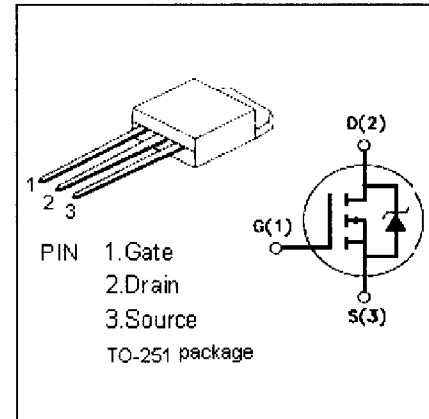


• ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	600	V
V_{GS}	Gate-Source Voltage-Continuous	± 20	V
I_D	Drain Current-Continuous	1	A
I_{DM}	Drain Current-Single Pulsed	4	A
P_D	Total Dissipation @ $T_C = 25^\circ C$	28	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55~150	$^\circ C$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	4.5	$^\circ C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	110	$^\circ C/W$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



N-Channel Mosfet Transistor

ELECTRICAL CHARACTERISTICS

$T_c=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=0.25\text{mA}$	600		V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=0.25\text{mA}$	2	4	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}; I_D=0.5\text{A}$		8	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20\text{V}; V_{DS}=0$		± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}; V_{GS}=0$		1	μA
V_{SD}	Forward On-Voltage	$I_S=1\text{A}; V_{GS}=0$		1.8	V