


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

General Purpose Rectifier 2500 Amperes Average 4200 Volts

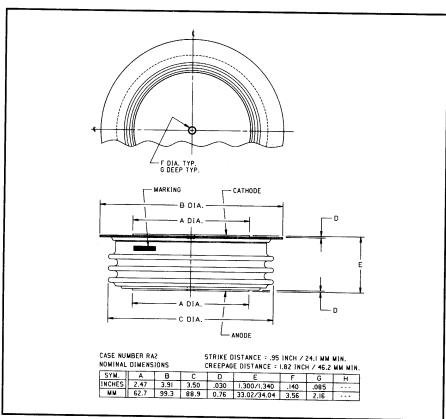


RA20 2500A (Outline Drawing)

#### Ordering Information:

Select the complete 8 digit part number you desire from the table below.

Туре	Voltage VRRM (Volts)	Current <sup>I</sup> T(av) (A)	Typical Recovery Time t <sub>rr</sub> (µsec)	
RA20	10 through 42	25	XX	
	1000V through 4200V	2500A	25µѕес	

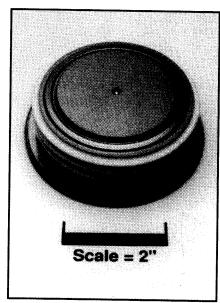

RA20 2500A General Purpose Rectifier 2500 Amperes Average, 4200 Volts

### **Description:**

Powerex General Purpose
Rectifiers are designed for high
blocking voltage capability with
low forward voltage to minimize
conduction losses. These hermetic
Pow-R-Disc devices can be
mounted using commercially
available clamps and heatsinks.

#### Features:

□ Low Forward Voltage
 □ Low Thermal Impedance
 □ Hermetic Packaging
 □ Excellent Surge and I<sup>2</sup>t Ratings

### **Applications:**

- ☐ Power Supplies
- ☐ Free Wheeling Diode
- ☐ Battery Chargers
  - Resistance Welding



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

RA20 2500A General Purpose Rectifier 2500 Amperes Average, 4200 Volts

## **Absolute Maximum Ratings**

Characteristics	Symbol	RA20 2500A	Units Volts Amperes	
Non-repetitive Transient Peak Reverse Voltage	V <sub>RSM</sub>	V <sub>RRM</sub> + 200V		
RMS Forward Current, T <sub>C</sub> = 100°C	l <sub>F(rms)</sub>	3920		
Average Current 180° Sine Wave, T <sub>C</sub> = 100°C	I <sub>F(av)</sub>	2500	Amperes	
RMS Forward Current, T <sub>C</sub> = 55°C	I <sub>F(rms)</sub>	5810	Amperes	
Average Current 180° Sine Wave, T <sub>C</sub> = 55°C	I <sub>F(av)</sub>	3700	Amperes	
Peak One Cycle Surge Forward Current (Non-repetitive) 60Hz	I <sub>fsm</sub>	28000	Amperes	
Peak One Cycle Surge Forward Current (Non-repetitive) 50Hz	I <sub>fsm</sub>	25500	Amperes	
3 Cycle Surge Current	I <sub>fsm</sub>	22400	Amperes	
10 Cycle Surge Current	Ifsm	17500	Amperes	
I <sup>2</sup> t (for Fusing) for One Cycle, 60Hz	l <sup>2</sup> t	3.20 x 10 <sup>6</sup>	A <sup>2</sup> sec	
Maximum I <sup>2</sup> t of Package (t = 8.3 msec)	l <sup>2</sup> t	125 x 10 <sup>6</sup>	A <sup>2</sup> sec	
Operating Temperature	Τ <sub>i</sub>	-40 to +150°C	°C	
Storage Temperature	T <sub>stg</sub>	-40 to +200°C	°C	
Approximate Weight		2.1	lb.	
, pproximate resigni		950	g	
Mounting Force		9000 to 11000	lb.	
Modified 1 0100		4100 to 5000	kg.	



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

RA20 2500A General Purpose Rectifier 2500 Amperes Average, 4200 Volts


# Electrical Characteristics, $T_j = 25^{\circ}C$ Unless Otherwise Specified


Characteristics	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Peak Reverse Leakage Current	IRRM	T <sub>j</sub> = 125°C, V <sub>R</sub> = V <sub>RRM</sub>		.75.	200	mA
Forward Voltage Drop	V <sub>FM</sub>	I <sub>FM</sub> = 3000A, Duty Cycle < 0.1%			1.25	Volts
Threshold Voltage, Low-level	V <sub>(TO)1</sub>	$T_j = 150^{\circ}\text{C}, I = 15\%, I_{T(av)} \text{ to } \pi I_{T(av)}$			0.74116	Volts
Slope Resistance, Low-level	(10)1 rT1	)			0.1320	
Threshold Voltage, High-level	V <sub>(TO)2</sub>	$T_j = 150$ °C, $I = \pi I_{T(av)}$ to $I_{TSM}$			0.1320	mΩ Volts
Slope Resistance, High-level	<sup>r</sup> T2	(av) 10 1 SM			0.1194	MΩ
V <sub>TM</sub> Coefficients, Low-level		$T_j = 150^{\circ}C$ , $I = 15\% I_{T(av)}$ to $\pi I_{T(av)}$			0.1134	11122
					$A_1 = 0.4990$	)5
				E	$B_1 = 0.0511$	6
				C	$C_1 = 1.4838$	<b>∃-04</b>
V 0 ": : : : : : : : : : : : : : : : : :					$0_1 = -0.0039$	12
V <sub>TM</sub> Coefficients, High-level		$T_j = 150$ °C, $I = \pi I_{T(av)}$ to ITSM				
				A	N <sub>2</sub> = -5.3652	<u>?</u>
				E	$B_2 = 0.86841$	
				$C_2 = 1.378E-04$		
				E	$\frac{1}{2} = -0.0194$	4
Typical Reverse Recovery Time	t <sub>rr</sub>	T <sub>C</sub> = 25°C, I <sub>FM</sub> = 1500A,		25		μsec
		$di_R/dt = 25A/\mu sec$ , $t_p = 190\mu sec$				•
Thermal Characteristics						
Maximum Thermal Resistance, Double Side	d Cooling					
Junction-to-Case	$R_{\theta(j-c)}$				0.013	°C/W





Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14


RA20 2500A General Purpose Rectifier 2500 Amperes Average, 4200 Volts

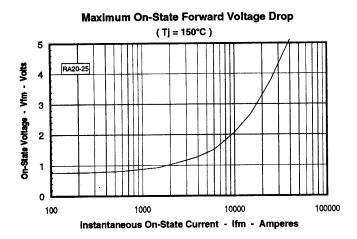


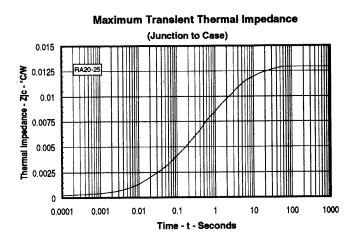

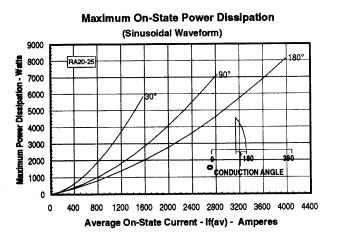

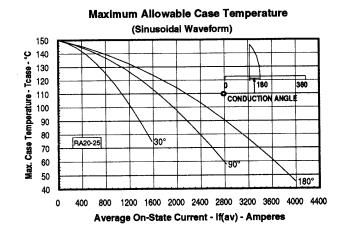

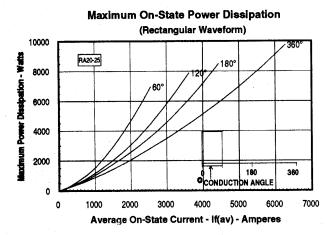

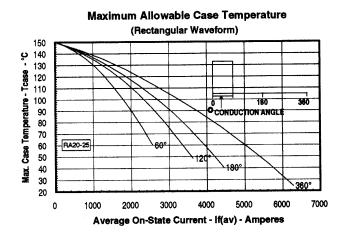

# This datasheet has been downloaded from:

www. Data sheet Catalog.com

Datasheets for electronic components.