

# **RC1616**

# 0.5A Adjustable/Fixed Low Dropout Linear Regulator

#### **Features**

- Low dropout voltage
- Load regulation: 0.05% typical
- · Current limit
- On-chip thermal limiting
- · Standard SOT-223 and TO-252 packages
- Three-terminal adjustable or fixed 2.5V, 3.3V or 5V

#### **Applications**

- USB Controlled Power Supply
- High efficiency linear regulators for Mixed Voltage Logic, ASIC, FPGA based systems
- · Post regulators for switching supplies
- · Battery chargers
- 5V to 3.3V, or 2.5V, 1.8V, 1.5V linear regulators
- Motherboard clock supplies
- · SDRAM Module supplies

### **Description**


The RC1616 and RC1616-2.5, -3.3 and -5 are low dropout three-terminal regulators with 0.5A output current capability. These devices have been optimized for low voltage where transient response and minimum input voltage are critical. The 5V version is designed also to be used in USB Hub and Motherboard applications.

On-chip thermal limiting provides protection against any combination of overload and ambient temperature that would create excessive junction temperatures.


Unlike PNP type regulators where up to 10% of the output current is wasted as quiescent current, the bias current of the RC1616 flows into the load, increasing efficiency.

The RC1616 series regulators are available in the industry-standard SOT-223 and TO-252 power packages.

# **Typical Applications**

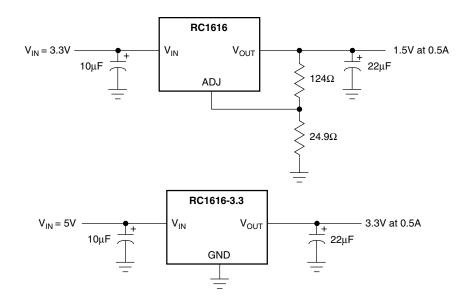

### **Pin Assignments**

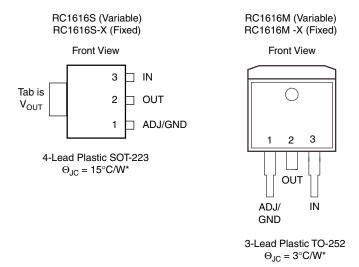

<sup>\*</sup>With package soldered to 0.5 square inch copper area over backside ground plane or internal power plane,  $\Theta_{JA}$  can vary from 30°C/W to >50°C/W. Other mounting techniques may provide better power dissipation than 30°C/W.

## **Absolute Maximum Ratings**

Parameter	Min.	Max.	Unit
V <sub>IN</sub>		7.5	V
Operating Junction Temperature Range	0	125	°C
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C

RC1616 PRODUCT SPECIFICATION

#### **Electrical Characteristics**

Operating Conditions:  $V_{IN} \le 7V$ ,  $T_J = 25^{\circ}C$  unless otherwise specified.

The • denotes specifications which apply over the specified operating temperature range.

Parameter	Conditions		Min.	Тур.	Max.	Units
Reference Voltage <sup>3</sup>	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75V,$ $10\text{mA} \le I_{OUT} \le 0.5\text{A}$	•	1.225 (-2%)	1.250	1.275 (+2%)	V
Output Voltage	$ \begin{array}{l} 10\text{mA} \leq I_{OUT} \leq 0.5\text{A} \\ \text{RC1616-2.5, } 4.0\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \\ \text{RC1616-3.3, } 4.5\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \\ \text{RC1616-5, } 6.2\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \end{array} $	•	2.450 3.234 4.900	2.500 3.300 5.000	2.550 3.366 5.100	V V V
Line Regulation <sup>1,2</sup>	$(V_{OUT} + 1.5V) \le V_{IN} \le 7V, I_{OUT} = 10mA$	•		0.005	0.2	%
Load Regulation <sup>1,2,3</sup>	$(V_{IN} - V_{OUT}) = 2V, 10mA \le I_{OUT} \le 0.5A$	•		0.05	0.5	%
Dropout Voltage	$\Delta V_{REF} = 1\%$ , $I_{OUT} = 0.5A$	•		1.000	1.200	V
Adjust Pin Current <sup>3</sup>		•		35	120	μΑ
Adjust Pin Current Change <sup>3</sup>	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75,$ $10\text{mA} \le I_{OUT} \le 0.5\text{A}$	•		0.2	5	μА
Minimum Load Current	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75$	•	10			mA
Quiescent Current	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	•		4	13	mA
Ripple Rejection	$f = 120Hz, C_{OUT} = 22\mu F$ Tantalum, $(V_{IN} - V_{OUT}) = 3V, I_{OUT} = 0.5A$		60	72		dB
Thermal Regulation	T <sub>A</sub> = 25°C, 30ms pulse			0.004	0.02	%/W
Temperature Stability		•		0.5		%
Long-Term Stability	T <sub>A</sub> = 125°C, 1000hrs.			0.03	1.0	%
RMS Output Noise (% of V <sub>OUT</sub> )	$T_A = 25^{\circ}C$ , $10Hz \le f \le 10kHz$			0.003		%
Thermal Resistance, Junction	SOT-223			15		°C/W
to Case	TO-252			3		°C/W
Thermal Shutdown				150		°C

#### Notes:

- 1. See thermal regulation specifications for changes in output voltage due to heating effects. Load and line regulation are measured at a constant junction temperature by low duty cycle pulse testing.
- 2. Line and load regulation are guaranteed up to the maximum power dissipation. Power dissipation is determined by input/output differential and the output current. Guaranteed maximum output power will not be available over the full input/output voltage range.
- 3. RC1616 only.

## **Typical Performance Characteristics**




Figure 1. Dropout Voltage vs. Output Current




Figure 3. Reference Voltage vs. Temperature




Figure 5. Minimum Load Current vs. Temperature




Figure 2. Load Regulation vs. Temperature




Figure 4. Output Voltage vs. Temperature




Figure 6. Adjust Pin Current vs. Temperature

RC1616 PRODUCT SPECIFICATION

# **Typical Performance Characteristics** (continued)




Figure 7. Short-Circuit Current vs. Temperature




Figure 8. Ripple Rejection vs. Frequency




Figure 9. Maximum Power Dissipation


### **Mechanical Dimensions**


#### 3-Lead TO-252 Package


Cumbal	Inches		Millimeters		Notes
Symbol	Min.	Max.	Min.	Max.	Notes
Α	.086	.094	2.19	2.39	
b	.025	.035	0.64	0.89	
b2	.030	.045	0.76	1.14	
b3	.205	.215	5.21	5.46	4
С	.018	.024	0.46	0.61	
c2	.018	.023	0.46	0.58	
D	.210	.245	5.33	6.22	1
E	.250	.265	6.35	6.73	1
е	.090 BSC		2.29	2.29 BSC	
Н	.370	.410	9.40	10.41	
L	.055	.070	1.40	1.78	3
L1	.108 REF		2.74 REF		
L3	.035	.080	0.89	2.03	4
L4	.025	.040	0.64	1.02	

#### Notes:

- Dimensions are exclusive of mold flash, metal burrs or interlead protrusion.
- 2. Stand off-height is measured from lead tip with ref. to Datum -B-.
- 3. Foot length is measured with ref. to Datum -A- with lead surface.
- 4. Thermal pad contour optional within dimension b3 and L3.
- 5. Formed leads to be planar with respect to one another at seating place -C-.
- 6. Dimensions and tolerances per ASME Y14.5M-1994.








RC1616 PRODUCT SPECIFICATION

### **Mechanical Dimensions**

### 4-Lead SOT-223 Package

Symbol	Inches		Millimeters		Notes
Syllibol	Min.	Max.	Min.	Max.	Notes
Α	_	.071	_	1.80	
A1	-	.181	_	4.80	
В	.025	.033	.640	.840	
С	_	.090	_	2.29	
D	.248	.264	6.30	6.71	
E	.130	.148	3.30	3.71	
е	.115	.124	2.95	3.15	
F	.033	.041	.840	1.04	
Н	.264	.287	6.71	7.29	
1	.012		.310	_	
J	_	10°	_	10°	
K	10°	16°	10°	16°	
L	.0008	.0040	.0203	.1018	
М	10°	16°	10°	16°	
N	.010	.014	.250	.360	

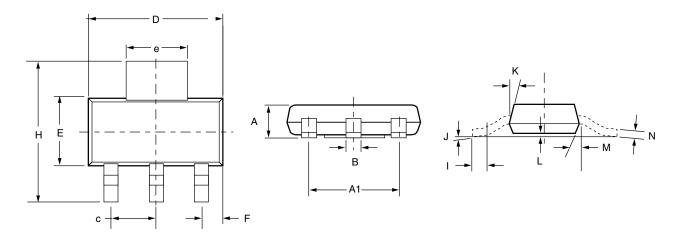

### **Ordering Information**

Product Number	Package
RC1616M	TO-252
RC1616S	SOT-223
RC1616M-2.5	TO-252
RC1616S-2.5	SOT-223
RC1616M-3.3	TO-252
RC1616S-3.3	SOT-223
RC1616M-5	TO-252
RC1616S-5	SOT-223

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com