# **Transient Voltage Suppressor Diode Array**

## **SOT-23 Dual Common Anode Diodes** for ESD Protection

These dual monolithic silicon TVS diodes are designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. Their dual junction common anode design protects two separate lines using only one package. These devices are ideal for situations where board space is at a premium.

#### **Specification Features:**

- SOT-23 Package Allows Either Two Separate Unidirectional Configurations or a Single Bidirectional Configuration
- Working Peak Reverse Voltage Range 5.0 V to 24 V
- Peak Power 300 Watt (8 X 20 μs)
- Low Leakage
- Flammability Rating UL 94 V-0
- These are Pb-Free Devices

#### **Mechanical Characteristics:**

CASE: Void-Free, Transfer-Molded, Thermosetting Plastic Case

FINISH: Corrosion Resistant Finish, Easily Solderable

#### MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

Package Designed for Optimal Automated Board Assembly Small Package Size for High Density Applications Available in 8 mm Tape and Reel


Use the Device Number to Order the 7 Inch/3,000 Unit Reel Replace the "T1" with "T3" in the Device Number to Order the 13 Inch/10,000 Unit Reel



#### ON Semiconductor®

http://onsemi.com


PIN 1. CATHODE 2. CATHODE 3. ANODE





SOT-23 CASE 318 STYLE 12

#### **MARKING DIAGRAM**



xxM = Device Code

xx = 05, 12, 15, 24, 36

M = Date Code\*

■ = Pb-Free Package (Note: Microdot may be in either location)

\*Date Code orientation and/or overbar may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
SM05T1G	SOT-23 (Pb-Free)	3000/Tape & Reel
SM12T1G	SOT-23 (Pb-Free)	3000/Tape & Reel
SM15T1G	SOT-23 (Pb-Free)	3000/Tape & Reel
SM24T1G	SOT-23 (Pb-Free)	3000/Tape & Reel
SM36T1G	SOT-23 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Peak Power Dissipation @ 20 μs (Note 1) @ T <sub>L</sub> ≤ 25°C	P <sub>pk</sub>	300	W
IEC 61000-4-2 (ESD) Air Contact		±15 ±8.0	kV
IEC 61000-4-4 (EFT)		40	Α
IEC 61000-4-5 (Lightening)		12	Α
Total Power Dissipation on FR-5 Board (Note 2) @ T <sub>A</sub> = 25°C Derate above 25°C Thermal Resistance, Junction-to-Ambient	P <sub>D</sub>	225 1.8 556	mW mW/°C °C/W
Thermal nesistance, Junction-to-Ambient	$R_{ heta JA}$	550	C/VV
Total Power Dissipation on Alumina Substrate (Note 3) @ T <sub>A</sub> = 25°C Derate above 25°C	$P_{D}$	300 2.4	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{ hetaJA}$	417	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	– 55 to +150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Non-repetitive current pulse per Figure 3

- 2.  $FR-5 = 1.0 \times 0.75 \times 0.62$  in.
- 3. Alumina = 0.4 x 0.3 x 0.024 in., 99.5% alumina
- NOTE: Other voltages may be available upon request

#### **ELECTRICAL CHARACTERISTICS**

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

Symbol	Parameter					
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current					
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>					
V <sub>RWM</sub>	Working Peak Reverse Voltage					
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>					
$V_{BR}$	Breakdown Voltage @ I <sub>T</sub>					
I <sub>T</sub>	Test Current					
$\Theta V_{BR}$	Maximum Temperature Coefficient of V <sub>BR</sub>					
I <sub>F</sub>	Forward Current					
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>					
Z <sub>ZT</sub>	Maximum Zener Impedance @ I <sub>ZT</sub>					
I <sub>ZK</sub>	Reverse Current					
Z <sub>ZK</sub>	Maximum Zener Impedance @ I <sub>ZK</sub>					



#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

				V <sub>BR</sub> , Breakd	own Voltage		V <sub>C</sub> @	Max I <sub>PP</sub>	Typical Capacitance
		V <sub>RWM</sub>	I <sub>R</sub> @ V <sub>RWM</sub>	(Volts)		Ι <sub>Τ</sub>	1 Amp	(Note 4)	(pF)
Device	Device Marking	(Volts)	(μΑ)	Min	Max	mA	(Volts)	(Amps)	Pin 1 to 3 @ 0 Volts
SM05T1G	05M	5	10	6.2	7.3	1.0	9.8	17	225
SM12T1G	12M	12	1.0	13.3	15.75	1.0	19	12	95
SM15T1G	15M	15	1.0	16.7	19.6	1.0	24	10	100
SM24T1G	24M	24	1.0	26.7	31.35	1.0	43	5.0	60
SM36T1G	36M	36	1.0	40.0	46.95	1.0	60	4.0	45

<sup>4.</sup>  $8 \times 20~\mu s$  pulse waveform per Figure 3

#### **TYPICAL CHARACTERISTICS**

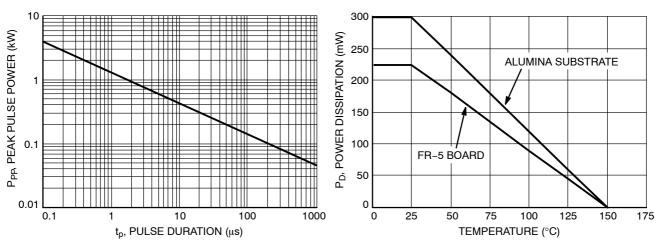


Figure 1. Non-Repetitive Peak Pulse Power versus Pulse Time

Figure 2. Steady State Power Derating Curve

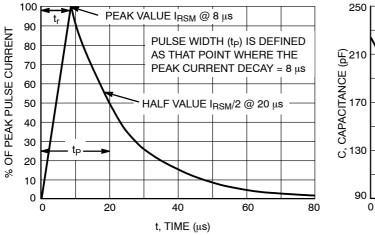


Figure 3.  $8\times20~\mu s$  Pulse Waveform

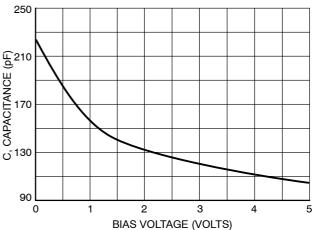


Figure 4. Typical Diode Capacitance (SM05)

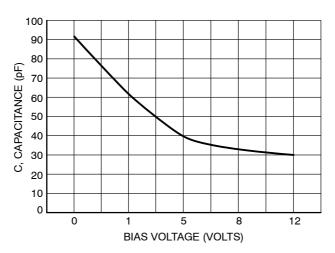



Figure 5. Typical Diode Capacitance (SM12)

#### **TYPICAL COMMON ANODE APPLICATIONS**


A quad junction common anode design in a SOT-23 package protects four separate lines using only one package. This adds flexibility and creativity to PCB design especially

when board space is at a premium. Two simplified examples of TVS applications are illustrated below.

#### **Computer Interface Protection**

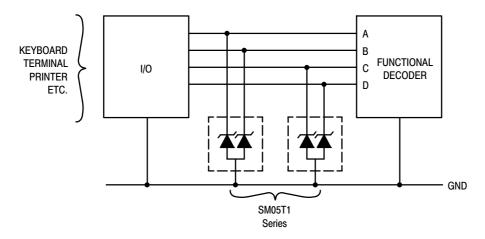


#### **Microprocessor Protection**

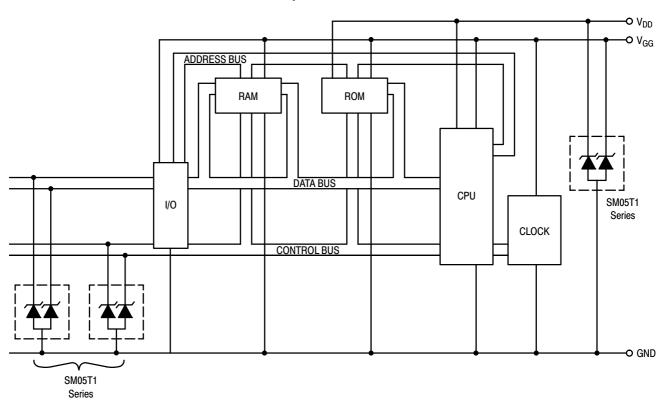

#### PACKAGE DIMENSIONS

#### SOT-23 (TO-236) CASE 318-08 **ISSUE AN**

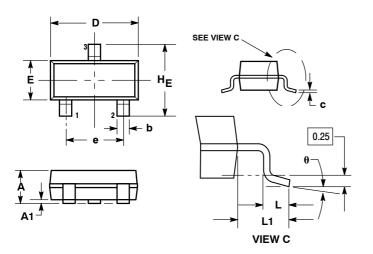


- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
  MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
  318-01 THRU -07 AND -09 OBSOLETE, NEW
- STANDARD 318-08.

	М	ILLIMETE	RS	INCHES			
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.89	1.00	1.11	0.035	0.040	0.044	
A1	0.01	0.06	0.10	0.001	0.002	0.004	
b	0.37	0.44	0.50	0.015	0.018	0.020	
С	0.09	0.13	0.18	0.003	0.005	0.007	
D	2.80	2.90	3.04	0.110	0.114	0.120	
E	1.20	1.30	1.40	0.047	0.051	0.055	
е	1.78	1.90	2.04	0.070	0.075	0.081	
L	0.10	0.20	0.30	0.004	0.008	0.012	
L1	0.35	0.54	0.69	0.014	0.021	0.029	
HE	2.10	2.40	2.64	0.083	0.094	0.104	

STYLE 12: PIN 1. CATHODE 2. CATHODE 3 ANODE

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice on semiconductor and are registered readerlands of semiconductor Components industries, Ite (SCILLC) . Solitude services are inject to make triangles without further holice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada

Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative