

isc Silicon NPN Power Transistor


2SC2261

DESCRIPTION

- High Power Dissipation-
: $P_C = 80W(\text{Max.})@T_C = 25^\circ\text{C}$
- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 120V(\text{Min.})$
- Complement to Type 2SA981


APPLICATIONS

- Designed for general purpose applications.

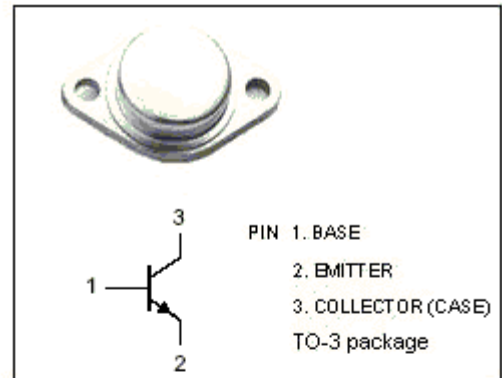

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	180	V
V_{CEO}	Collector-Emitter Voltage	120	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	8	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	80	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

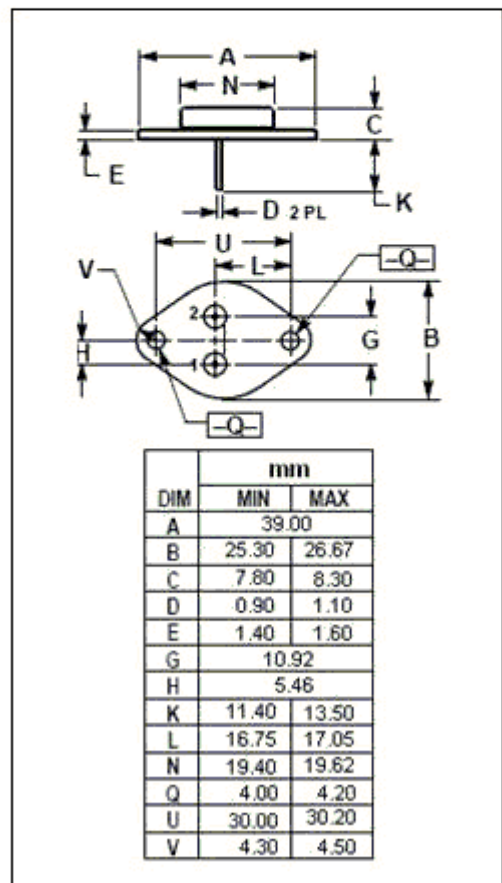

isc Silicon NPN Power Transistor**2SC2261****ELECTRICAL CHARACTERISTICS****T_j=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 50mA; I _B = 0	120			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 3A; I _B = 0.3A			1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 180V; I _E = 0			1.0	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 6V; I _C = 0			1.0	mA
h _{FE}	DC Current Gain	I _C = 3A; V _{CE} = 4V	30			
f _T	Current-Gain—Bandwidth Product	I _E = -0.5A; V _{CE} = 12V		15		MHz