

Micro Commercial Components

Collector Current : I_C=2A

Moisure Sensitivity Level 1

Marking: Type Number

Features

Symbol

VCEO

 V_{CBO}

 V_{CER}

 V_{EBO}

lc

 I_{CP}

Pc

 $T_{\rm J}$

T_{STG}

Symbol

V_{CEO(sus)}

I_{CBO}

I_{EBO}

 h_{FE}

V_{CE(sat)}

V_{BE(on)}

fT

OFF CHARACTERISTICS



Halogen free available upon request by adding suffix "-HF"

Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix designates

BD233

BD235

BD237

BD233

BD235

BD237

BD233

BD235

BD237

Electrical Characteristics @ 25°C Unless Otherwise Specified

Power Dissipation: P_{CM}=1.25W, Ta=25°C

Complement to BD234/236/238 respectively

RoHS Compliant. See ordering information) Epoxy meets UL 94 V-0 flammability rating

Rating

Collector-Emitter Voltage

Collector-Base Voltage

Collector-Emitter Voltage

Emitter-Base Voltage

Collector Current (DC)

Storage Temperature

Collector Current (Pulse)

Collector Dissipation (Tc=25°C)

Operating Junction Temperature

Parameter

Collector-Emitter Breakdown Voltage

BD233 (I_C=0.1Adc, I_B=0)

BD235 (I_c=0.1Adc, I_B=0)

BD237 (I_C=0.1Adc, I_B=0)

BD233 (V_{CB}=45Vdc, I_E=0)

BD235 (V_{CB}=60Vdc, I_E=0)

BD237 (V_{CB}=100Vdc, I_E=0)

Collector-Emitter Saturation Voltage

Current Gain Bandwidth Product

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7.

Collector Cutoff Current

Emitter Cutoff Current

(V_{BE}=5.0Vdc, I_C=0) DC Current Gain

(V_{CE}=2V, I_C=150mA)

Base-Emitter ON Voltage

 $(V_{CE}=2V, I_{C}=1A)$

(I_C=1A, I_B=0.1A)

 $(V_{CE}=2V, I_{C}=1A)$

(V_{CE}=10V, I_C=0.25A)

*Pulse Test: PW=300µs, Duty Cycle=1.5% Pulsed

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Rating

45

60

80

45

60

100

45

60

100

5

2

6

25

150

-65 to +150

Max

100

100

100

1.0

0.6

1.3

Min

45

60

80

40

25

3

Unit

V

V

V

V

A

Α

W

°C

°C

Units

V

V

V

μΑ

μA

ūΑ

mΑ


V

V

MHz

BD233 BD235 BD237

NPN Plastic-Encapsulate Transistors

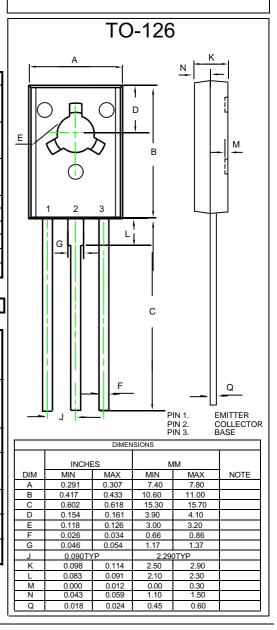

www.mccsemi.com

Revision: B



BD233/235/237

Micro Commercial Components

I_c = 10 I_B

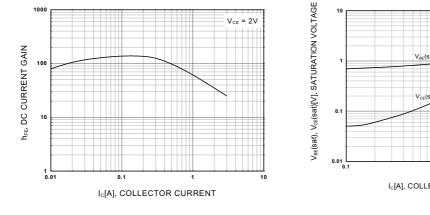


Figure 1. DC current Gain


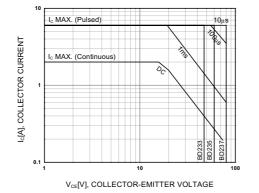



Figure 2. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage





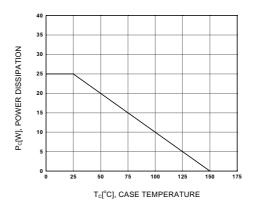


Figure 4. Power Derating

www.mccsemi.com



Ordering Information :

Device	Packing
Part Number-BP	Bulk; 1Kpcs/Box

Note : Adding "-HF" suffix for halogen free, eg. Part Number-BP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com